

DuraMON-WS series

DuraMON 26 WS
DuraMON 26 WS SL
DuraMON 26 WS LED
DuraMON 27 WS ECDIS

User Reference Manual



Disclaimer

ISIC A/S makes no representation or warranties with respect to the contents or use of this manual, and specifically disclaims any express or implied warranties of merchantability or fitness for any particular purpose. Further, ISIC A/S reserves the right to revise this publication and to make changes to its content at any time, without obligation to notify any person or entity of such revisions or changes.

Image sticking: If the monitor is operated with static images (logo's etc) it will inevitably lead to images sticking on the display (like on old CRT's). This is not a permanently situation and can be removed by operating the monitor with a completely black screen.

FCC Warning

Computing devices and peripherals generate and radiate radio frequency energy, and if not installed and used in accordance with the instructions advised by ISIC A/S, it may cause interference to radio communication.

The DuraFLEX series, manufactured by ISIC A/S, is designed to comply with the emerging generic EEC standards, that cover applications in maritime environment.

Classification

The monitor is classified as "protected from the weather" according to IEC 60945 ed.4 (former class b).

Approvals

Approval according to IACS E10 ed. 5 and IEC 60945 ed. 4, Maritime navigation and radio communication equipment and systems – General requirements.

ECDIS IEC 61174 ed. 3

Radar IEC 62288 ed. 1

Radar IEC 62388 ed. 1



ISIC A/S is complying with the WEEE directive within the European Union, stating that electronic and electric products must be collected separately.

Products are marked according to the directive.

Copyright 2014 ISIC A/S
ISIC PN: 05435-000 rev. D

ISIC A/S
Edwin Rahrsvej 54
DK-8220 Brabrand
Denmark

Phone: +45 70 20 70 77
Fax: +45 70 20 79 76
Web: <http://www.isic-systems.com>



Table of Contents

1	FEATURES.....	5
2	GENERAL CONSIDERATIONS ON INSTALLATION AND OPERATION	6
3	DURAMON WS CONNECTIONS	7
4	DURAMON WS FRONT PANEL CONTROLS (ECDIS AND RADAR).....	8
4.1	DURAMON WS FRONT FOIL:	8
5	POPUP MENU.....	9
6	ADVANCED OSD	11
6.1	INPUT SELECT	12
6.2	IMAGE ADJUSTMENTS.....	13
6.3	COLOR ADJUSTMENTS.....	15
6.4	ADV. COLOR SETTINGS	16
6.5	SCALING ADJUSTMENTS	17
6.6	OSD SETTINGS	18
6.7	SYSTEM SETTINGS	20
6.8	SERIAL COMMUNICATION.....	22
6.9	VIDEO SETTINGS (OPTIONAL).....	23
7	SERIAL CONNECTION PIN-OUT	25
8	TECHNICAL SPECIFICATIONS DURAMON WS	26
9	MECHANICAL OUTLINE DURAMON 26 WS.....	28
10	MECHANICAL OUTLINE DURAMON 26 WS SL.....	29
11	MECHANICAL OUTLINE DURAMON 26 WS LED	30
12	MECHANICAL OUTLINE DURAMON 27 WS ECDIS	31
13	MECHANICAL OUTLINE DURAMON26WS/SL/LED BRACKET STAND OPTION.....	32
14	MECHANICAL OUTLINE DURAMON26WS/SL/LED BRACKET WALLMOUNT OPTION.....	33
15	MECHANICAL OUTLINE DURAMON27 WS ECDIS BRACKET STAND OPTION.....	34
16	MECHANICAL OUTLINE DURAMON27 WS ECDIS BRACKET WALLMOUNT OPTION.....	35
17	ECDIS MODE.....	36
18	DURA COMMUNICATION PROTOCOL	36
19	COMPASS SAFE DISTANCE	36
20	POWER CONSUMPTION	36



21	IN RUSH CURRENT	37
22	TROUBLESHOOTING	37
23	SERVICING THE UNIT	37
24	TERMS, ACRONYMS AND ABBREVIATIONS	38
25	ISIC INFO / SUPPORT	39
26	REVISION HISTORY	40
27	APPENDIX A: PIXEL POLICY	41
28	APPENDIX B: LATEST FIRMWARE VERSIONS	44
29	APPENDIX C: DECLARATION OF CONFORMITY	45



1 Features

Congratulations on your purchase of a DuraMON WS. This short form manual is designed to get you started working with your new DuraMON WS.

The DuraMON WS series of monitors are all made as rugged monitors especially designed for the demanding operating conditions at sea.

The DuraMON WS series are tested for full compliance to marine-standards IACS E10 and IEC 60945. The monitor comes with excellent brightness and contrast levels that, together with wide viewing angles, ensure a good readability thus making it very eye-friendly. For the best picture quality, always use a double shielded cable with ferrites, like the one supplied with the monitor.

Direct dimming control (0-100%) from UP/DOWN buttons.

Full settings control via menu or serial link.

Picture in picture function, scalable on the screen.

Anti-glare coated glass.

IP65 protection and liquid resistant front.

Multiple connections to cover the widest range of signal sources:

DVI-D

RGB

S-Video (optional)

Composite (optional)

Firmware update via RS232



2 General considerations on Installation and Operation

The DuraMON WS is designed to work at conditions according to IEC 60945. However, keeping the temperature and vibration level at a minimum will extend the life time of the product. ISIC recommend operating this product at normal room temperature (20-25 °C), with the lowest level of vibration and humidity.

Installation of the DuraMON WS

In order to obtain the best possible operating conditions, please note the following precautions.

- Room for cooling.
When designing the cabinet/console for the DuraMON WS, please ensure that air can flow freely around the cabinet, in order to avoid any unnecessary rise in temperature. If it is not possible to have an adequate natural airflow, use a fan to force the airflow to be higher.
- Mounting positions
To obtain adequate cooling by convection ISIC recommends that the DuraMON WS is mounted at least 30 degrees from horizontal. If this is not possible, forced cooling must be applied directly to the unit in order not to overheat it.
- Sunlight
If the unit can be exposed to direct sunlight, there is a potential risk that the unit can be overheated. Please take measures to prevent direct sunlight. Do also consider forced cooling on the back of the unit.

Operation of the DuraMON WS

To ensure that colors and luminance on the display is correct in ECDIS applications, do not use the monitor until the warm-up period has completed.


The warm-up period is as follows:

	Day mode	Dusk mode	Night mode
DuraMON 26 WS	3 hours	1 hour and 45 min	2 hours
DuraMON 26 WS SL	3 hours	1 hour and 45 min	2 hours
DuraMON 26 WS LED	40 min	40 min	40 min
DuraMON 27 WS ECDIS	1 hour	1 hour	1 hour



3 DuraMON WS connections


Below is a view of optional connections to the monitor. The default inputs are: power, RS-232, DVI and VGA.

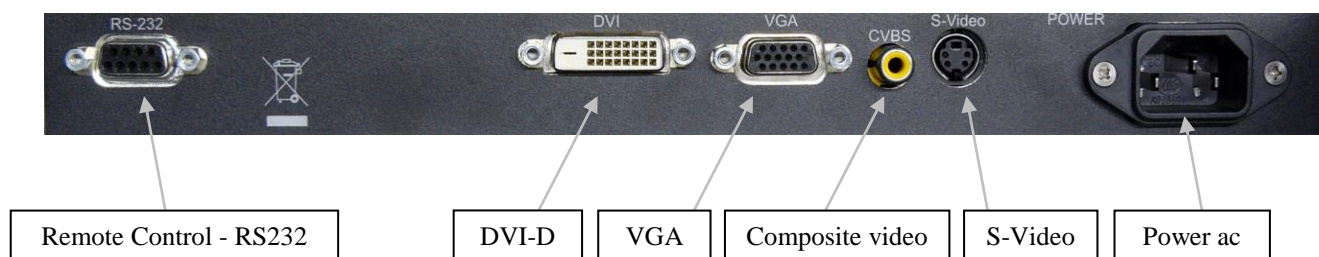

4 DuraMON WS front panel controls (ECDIS and Radar)

The front panel is illuminated and will be dimmed continuously depending on changing of backlight brightness.

4.1 DuraMON WS front foil:

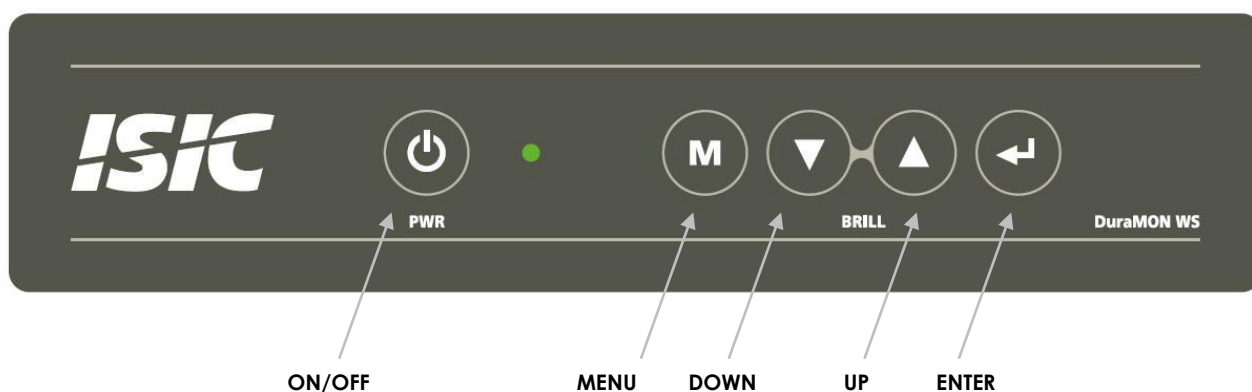

ON/OFF:

This key is used to turn the product on or off. Pressing it will turn the power on, while holding it pressed will turn the power off. The light in the button will change from blue to red to indicate it's powered down. It is important to notice that, when powered off, the product still consumes some power from the mains. To cut off the power from the product it is necessary to unplug its power cord from the mains.

If there is no active signal, the monitor will go to suspend mode until an active signal is detected. While the monitor is in suspend mode, the blue light will blink in the ON/OFF button.

MENU:

Pressing this key the Popup menu will appear. See Popup Menu section for details.

UP/DOWN:

Used to adjust backlight or to navigate and adjust settings in menus. Pressing UP and DOWN together will restore the backlight level to the last selected ECDIS mode by the serial link. (See document 04924-000 for protocol details).


ENTER:

This key is used to confirm and to enter the advanced OSD by pressing ENTER and thereafter MENU while holding ENTER pressed.





5 Popup Menu



Press "MENU" button once, and the Popup Menu will appear. While the Popup Menu is active, no settings sent over the serial link will be executed.

Press once on the "MENU" key	<div style="text-align: center;"> <p>Backlight</p>  <p>80</p> </div>	It is now possible to adjust the backlight level by pressing either up- or down key.
Press twice on the "MENU" key	<div style="text-align: center;"> <p>Press ENTER to select default values</p> <p>Press MENU to exit</p> </div>	<p>It is now possible to default backlight, brightness and contrast by pressing the ENTER key.</p> <p>For ECDIS calibrated displays, the backlight level will be set to the last selected ECDIS mode by the serial link. (See 04924-000 document for details on how to change ECDIS mode over the serial link).</p> <p><i>NOTE: See advanced OSD chapter for default values.</i></p>
Press three times on the "MENU" key		Leaving Popup Menu.

If color control in the advanced menu is set to user mode the Popup Menu will include Brightness and Contrast adjustments.

Press once on the "MENU" key	<div style="text-align: center;"> <p>Backlight</p>  <p>80</p> </div>	It is now possible to adjust the backlight level by pressing either up- or down key.
Press twice on the "MENU" key	<div style="text-align: center;"> <p>Brightness</p>  <p>50</p> </div>	It is now possible to adjust the brightness level by pressing either the up- or down key.

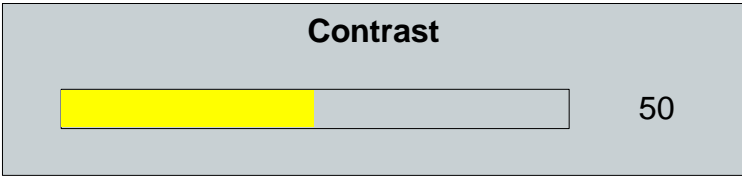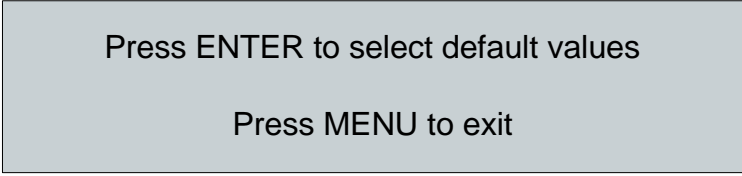

<p>Press three times on the "MENU" key</p>	 <p style="text-align: center;">Contrast</p> <p style="text-align: right;">50</p>	<p>It is now possible to adjust the contrast level by pressing either the up- or down key.</p>
<p>Press four times on the "MENU" key</p>	 <p style="text-align: center;">Press ENTER to select default values</p> <p style="text-align: center;">Press MENU to exit</p>	<p>It is now possible to default backlight, brightness and contrast by pressing the ENTER key.</p> <p>For ECDIS calibrated displays, the backlight level will be set to the last selected ECDIS mode by the serial link. (See 04924-000 document for details on how to change ECDIS mode over the serial link).</p> <p><i>NOTE: See advanced OSD chapter for default values.</i></p>
<p>Press five times on the "MENU" key</p>		<p>Leaving Popup Menu.</p>



6 Advanced OSD

With the Advanced OSD (On Screen Display) you can modify the settings and control the special features of the DuraMON WS as described on the next pages.

To enter the Advanced OSD keep the "ENTER" key down and at the same time press the "MENU" key.

To navigate the Advanced OSD use the "UP" and "DOWN" buttons and press "ENTER" to select a specific setting. To get back to the previous menu point, press the "MENU" button.



6.1 Input select



Input Select – Main Picture Channel	Input Select – Scan Inputs
<div data-bbox="153 347 347 618"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="153 629 347 880"> <p>Input Select</p> <ul style="list-style-type: none"> Main Picture Channel Scan Inputs PIP Mode PIP Channel PIP Size PIP Hor. Position PIP Ver. Position Swap Main & PIP </div> <div data-bbox="153 891 347 1093"> <p>Main Picture Channel</p> <ul style="list-style-type: none"> VGA DVI Composite Video S-Video VGA2 DVI2 </div>	<div data-bbox="833 347 1027 618"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="833 629 1027 880"> <p>Input Select</p> <ul style="list-style-type: none"> Main Picture Channel Scan Inputs PIP Mode PIP Channel PIP Size PIP Hor. Position PIP Ver. Position Swap Main & PIP </div> <div data-bbox="833 891 1027 1093"> <p>Scan Inputs</p> <ul style="list-style-type: none"> Off On </div>
<div data-bbox="153 1131 347 1435"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="153 1447 347 1697"> <p>Input Select</p> <ul style="list-style-type: none"> Main Picture Channel Scan Inputs PIP Mode PIP Channel PIP Size PIP Hor. Position PIP Ver. Position Swap Main & PIP </div> <div data-bbox="153 1709 347 1910"> <p>PIP Mode</p> <ul style="list-style-type: none"> Off Picture in Picture Side by Side </div>	<p data-bbox="376 1167 766 1391">By enabling the PIP (Picture in Picture) function it is possible to define the PIP channel, size and position of it. It is also possible to swap between the main picture channel and PIP channel.</p> <p data-bbox="376 1424 539 1458">Default is off</p> <p data-bbox="376 1816 762 1917"><i>It is not possible to select composite and s-video at the same time.</i></p>



6.2 Image Adjustments


<p>Image Adjustments – Auto Adjust</p> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select <li style="background-color: #e0e0e0;">Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Image Adjustments</p> <ul style="list-style-type: none"> <li style="background-color: #e0e0e0;">Auto Adjust Clock Phase Bandwidth Hor. Position Ver. Position </div> <div style="border: 1px solid black; padding: 10px; text-align: center;"> <p>Select to execute auto adj.</p> </div>	<p>Selecting auto adjust will force the system to adjust the image (clock, phase, bandwidth and position)</p>	<p>Image Adjustments – Clock</p> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select <li style="background-color: #e0e0e0;">Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Image Adjustments</p> <ul style="list-style-type: none"> Auto Adjust <li style="background-color: #e0e0e0;">Clock Phase Bandwidth Hor. Position Ver. Position </div> <div style="border: 1px solid black; padding: 10px;"> <p style="text-align: center;">Clock</p> <p style="text-align: center;">1840</p> <div style="background-color: #e0e0e0; width: 100%; height: 15px; margin-bottom: 5px;"></div> <div style="background-color: #000080; width: 20%; height: 15px;"></div> </div>	<p>The pixel clock for the main picture channel can be selected here.</p>
<p>Image Adjustments – Phase</p> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select <li style="background-color: #e0e0e0;">Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Image Adjustments</p> <ul style="list-style-type: none"> Auto Adjust Clock <li style="background-color: #e0e0e0;">Phase Bandwidth Hor. Position Ver. Position </div> <div style="border: 1px solid black; padding: 10px;"> <p style="text-align: center;">Phase</p> <p style="text-align: center;">4</p> <div style="background-color: #e0e0e0; width: 100%; height: 15px; margin-bottom: 5px;"></div> <div style="background-color: #000080; width: 5%; height: 15px;"></div> </div>	<p>The phase of the display can be set for the main picture channel.</p>	<p>Image Adjustments – Bandwidth</p> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select <li style="background-color: #e0e0e0;">Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Image Adjustments</p> <ul style="list-style-type: none"> Auto Adjust Clock Phase <li style="background-color: #e0e0e0;">Bandwidth Hor. Position Ver. Position </div> <div style="border: 1px solid black; padding: 10px;"> <p style="text-align: center;">Bandwidth</p> <p style="text-align: center;">0</p> <div style="background-color: #e0e0e0; width: 100%; height: 15px; margin-bottom: 5px;"></div> <div style="background-color: #000080; width: 0%; height: 15px;"></div> </div>	<p>The bandwidth of the display can be set here for the main picture channel.</p>



Image Adjustments – Hor. Position	Image Adjustments – Ver. Position	
<div data-bbox="153 264 347 533"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="153 544 347 790"> <p>Image Adjustments</p> <ul style="list-style-type: none"> Auto Adjust Clock Phase Bandwith Hor. Position Ver. Position </div> <div data-bbox="153 801 347 1003"> <p>Hor. Position</p> <p>112</p>  </div>	<p>The horizontal position of the picture of the main picture channel can be set here.</p>	
	<div data-bbox="833 264 1027 533"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="833 544 1027 790"> <p>Image Adjustments</p> <ul style="list-style-type: none"> Auto Adjust Clock Phase Bandwith Hor. Position Ver. Position </div> <div data-bbox="833 801 1027 1003"> <p>Ver. Position</p> <p>24</p>  </div>	<p>The vertical position of the picture of the main picture channel can be set here.</p>




6.3 Color adjustments

Color Adjustment – Backlight	Color Adjustment – Gamma
<div data-bbox="151 347 343 616"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="151 627 343 862"> <p>Color Adjustment</p> <ul style="list-style-type: none"> Backlight Gamma Color Control Brightness Contrast Saturation Hue Fleshtone Auto Color Adjust </div> <div data-bbox="151 873 343 1086"> <p>Backlight</p> <p>80</p>  </div>	<p>It is possible to set the backlight level.</p> <p>Default is 100% for non-ECDIS calibrated displays.</p> <p>For ECDIS calibrated displays, the default value is the value for the backlight level for ECDIS Day mode.</p> <p><i>Unless popups or OSD is present it is possible to press the "UP" or "DOWN" button to adjust the backlight level and then press "ENTER" afterwards.</i></p>
<div data-bbox="151 1153 343 1422"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="151 1433 343 1680"> <p>Color Adjustment</p> <ul style="list-style-type: none"> Backlight Gamma Color Control Brightness Contrast Saturation Hue Fleshtone Auto Color Adjust </div> <div data-bbox="151 1691 343 1892"> <p>Color Control</p> <ul style="list-style-type: none"> Native User </div>	<p>The "Color Control" of the "Main Picture Channel" can be either Native or User.</p> <p>Setting the Color Control to User, adjustments like Brightness, Contrast, Saturation, Hue, Fleshtone and AutoColor Adjust becomes possible.</p> <p>Also the Advanced Color Adjustments becomes possible by setting the Color Control to User.</p> <p>Default is Native</p>
<div data-bbox="151 347 343 616"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="151 627 343 862"> <p>Color Adjustment</p> <ul style="list-style-type: none"> Backlight Gamma Color Control Brightness Contrast Saturation Hue Fleshtone Auto Color Adjust </div> <div data-bbox="151 873 343 1086"> <p>Gamma</p> <ul style="list-style-type: none"> Native 2.2 Custom </div>	<p>The gamma correction for the "main picture channel" is set here. It can be set to native, 2.2 or custom defined.</p> <p>Native = The panel default curve</p> <p>2.2 = Gamma curve 2.2</p> <p>Custom = Special gamma curve that can be implemented to fit a user needs.</p> <p>Default is native.</p>




6.4 Adv. Color Settings

Adv. Color Settings – Color Space	Adv. Color Settings – Color Temp
<div data-bbox="156 344 347 618"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="156 629 347 880"> <p>Adv. Color Settings</p> <ul style="list-style-type: none"> Color space Color temp Red Green Blue </div> <div data-bbox="156 891 347 1093"> <p>Color Space</p> <ul style="list-style-type: none"> Default RGB Yuv YPbPr </div>	<div data-bbox="836 344 1027 618"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="836 629 1027 880"> <p>Adv. Color Settings</p> <ul style="list-style-type: none"> Color space Color temp Red Green Blue </div> <div data-bbox="836 891 1027 1093"> <p>Color temp</p> <ul style="list-style-type: none"> User 4200K 5000K 5400K 6500K 7500K 9300K </div>
<div data-bbox="156 1133 783 1167"> <p>Adv. Color Settings – Red/Green/Blue</p> </div> <div data-bbox="156 1173 347 1447"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="156 1458 347 1709"> <p>Adv. Color Settings</p> <ul style="list-style-type: none"> Color space Color temp Red Green Blue </div> <div data-bbox="156 1720 347 1921"> <p>Red</p> <p>255</p>  </div>	<div data-bbox="820 1173 1445 1229"> <p>The rate for Red/Green/Blue can be set here from 0 – 255.</p> </div> <div data-bbox="820 1263 1445 1296"> <p>Default is 255/255/255</p> </div>





6.5 Scaling Adjustments




Scaling Adjustments – Scaling Mode	Scaling Adjustments – Picture Flip
<div data-bbox="153 338 347 613"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="153 622 347 875"> <p>Scaling Adjustments</p> <ul style="list-style-type: none"> Scaling Mode Picture Flip Zoom Hor. Pan Ver. Pan </div> <div data-bbox="153 884 347 1086"> <p>Scaling Mode</p> <ul style="list-style-type: none"> Expand Stretch Aspect 1:1 </div>	<div data-bbox="826 338 1021 613"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="826 622 1021 875"> <p>Scaling Adjustments</p> <ul style="list-style-type: none"> Scaling Mode Picture Flip Zoom Hor. Pan Ver. Pan </div> <div data-bbox="826 884 1021 1086"> <p>Picture Flip</p> <ul style="list-style-type: none"> Mirror Horizontal Mirror Vertical </div>
<div data-bbox="153 1120 347 1429"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="153 1438 347 1691"> <p>Scaling Adjustments</p> <ul style="list-style-type: none"> Scaling Mode Picture Flip Zoom Hor. Pan Ver. Pan </div> <div data-bbox="153 1700 347 1904"> <p>Zoom</p> <p>100</p>  </div>	<p data-bbox="411 1160 762 1384">It is possible to zoom the picture of the Main Picture Channel from 80 to 300. If zoom differs from 100 (no zoom) it is possible to pan both horizontally and vertically.</p> <p data-bbox="411 1417 715 1485">Default value is 100 (no zoom)</p>

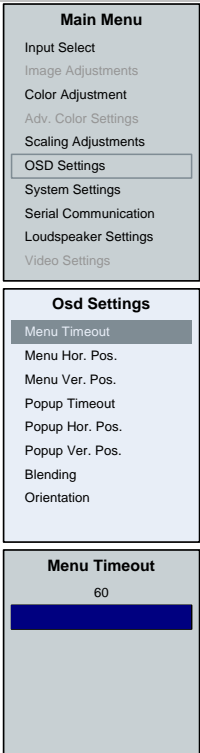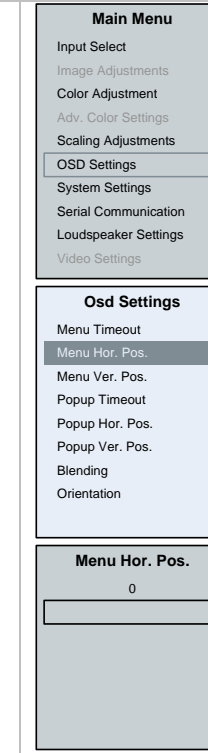

6.6 OSD settings



<p>OSD Settings – Menu Timeout</p> 	<p>The Menu Timeout period can be set between 0 and 60 seconds in steps of 5 seconds.</p> <p>Default is 30 seconds</p>	<p>OSD Settings – Menu Hor. Pos.</p> 	<p>The Horizontal Position of the OSD can be set from 0 (left margin) to 100 (right margin).</p> <p>Default is 0 (left margin).</p>
<p>OSD Settings – Menu Ver. Pos.</p> 	<p>The Vertical Position of the OSD can be set from 0 (upper margin) to 100 (bottom margin).</p> <p>Default is 50 (center of the display)</p>	<p>OSD Settings – Popup Timeout</p> 	<p>The Popup Menu Timeout (Easy-to-use OSD menu) period can be set between 0 and 60 seconds in steps of 1 second.</p> <p>Default is 5 seconds</p>






<p>OSD Settings – Popup Hor. Pos.</p> <div data-bbox="151 293 347 568"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="151 577 347 824"> <p>Osd Settings</p> <ul style="list-style-type: none"> Menu Timeout Menu Hor. Pos. Menu Ver. Pos. Popup Timeout Popup Hor. Pos. Popup Ver. Pos. Blending Orientation </div> <div data-bbox="151 833 347 1039"> <p>Popup Hor. Pos.</p> <p>50</p>  </div>	<p>OSD Settings – Popup Ver. Pos.</p> <p>The Horizontal Position of the Popup can be set from 0 (left margin) to 100 (right margin).</p> <p>Default is 50 (center of the display)</p> <div data-bbox="831 293 1027 568"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="831 577 1027 824"> <p>Osd Settings</p> <ul style="list-style-type: none"> Menu Timeout Menu Hor. Pos. Menu Ver. Pos. Popup Timeout Popup Hor. Pos. Popup Ver. Pos. Blending Orientation </div> <div data-bbox="831 833 1027 1039"> <p>Popup Ver. Pos.</p> <p>50</p>  </div>
<p>OSD Settings – Blending</p> <div data-bbox="151 1111 347 1386"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="151 1395 347 1641"> <p>Osd Settings</p> <ul style="list-style-type: none"> Menu Timeout Menu Hor. Pos. Menu Ver. Pos. Popup Timeout Popup Hor. Pos. Popup Ver. Pos. Blending Orientation </div> <div data-bbox="151 1650 347 1856"> <p>Blending</p> <p>3</p>  </div>	<p>OSD Settings – Orientation</p> <p>The transparency of both the OSD and the Popup can be selected from 0 (solid) to 15 (clear)</p> <p>Default is 2</p> <div data-bbox="831 1111 1027 1386"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="831 1395 1027 1641"> <p>Osd Settings</p> <ul style="list-style-type: none"> Menu Timeout Menu Hor. Pos. Menu Ver. Pos. Popup Timeout Popup Hor. Pos. Popup Ver. Pos. Blending Orientation </div> <div data-bbox="831 1650 1027 1856"> <p>Orientation</p> <ul style="list-style-type: none"> Mirror Horizontal Mirror Vertical Rotate 90° </div>



6.7 System settings

<p>System Settings – Splash Timeout</p> <div data-bbox="156 342 347 611"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="156 622 347 869"> <p>System Settings</p> <ul style="list-style-type: none"> Splash Timeout Monitor Timeout Save Settings Load Settings Reset Factory Settings Keypad LED min. Keypad LED max. Monitor info </div> <div data-bbox="156 880 347 1081"> <p>Splash Timeout</p> <p>3</p>  </div>	<p>The time a splash menu appears (startup logo) can be varied from 0 to 60 seconds.</p> <p>Default is 3 seconds</p>	<p>System Settings – Monitor Timeout</p> <div data-bbox="834 342 1026 611"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="834 622 1026 869"> <p>System Settings</p> <ul style="list-style-type: none"> Splash Timeout Monitor Timeout Save Settings Load Settings Reset Factory Settings Keypad LED min. Keypad LED max. Monitor info </div> <div data-bbox="834 880 1026 1081"> <p>Monitor Timeout</p> <p>8</p>  </div>	<p>The time before the DuraMON WS will enter power down mode if no input signal is available can be adjusted from 0 to 120 seconds.</p> <p>Default is 8 seconds</p>
<p>System Settings – Save Settings</p> <div data-bbox="156 1160 347 1429"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="156 1440 347 1686"> <p>System Settings</p> <ul style="list-style-type: none"> Splash Timeout Monitor Timeout Save Settings Load Settings Reset Factory Settings Keypad LED min. Keypad LED max. Monitor info </div> <div data-bbox="156 1697 347 1899"> <p>Save Settings</p> <p>Select to save user settings</p> </div>	<p>It is possible to save the user settings.</p>	<p>System Settings – Load Settings</p> <div data-bbox="834 1160 1026 1429"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="834 1440 1026 1686"> <p>System Settings</p> <ul style="list-style-type: none"> Splash Timeout Monitor Timeout Save Settings Load Settings Reset Factory Settings Keypad LED min. Keypad LED max. Monitor info </div> <div data-bbox="834 1697 1026 1899"> <p>Load Settings</p> <p>Select to load user settings</p> </div>	<p>It is possible to load the user setting.</p>

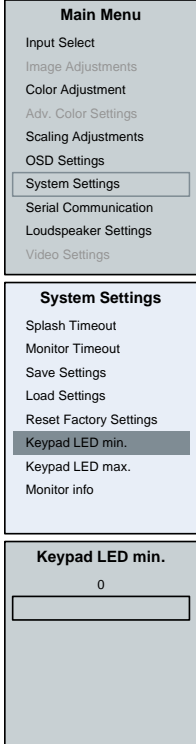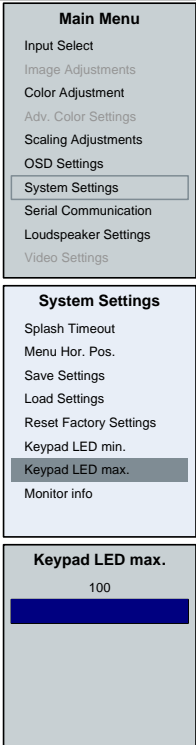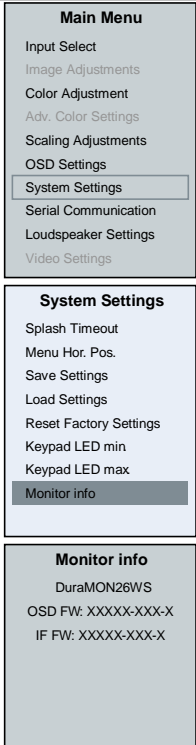

<p>System Settings – Reset Factory Settings</p> 		<p>System Settings – Keypad LED min.</p> <p>It is possible to Reset Factory Settings and bring the DuraMON WS back to a known state.</p>	<p>System Settings – Keypad LED min.</p> <p>The minimum backlight value of the keypads can be adjusted from 0 to 100.</p> <p>Default is 10</p> 
<p>System Settings – Keypad LED max.</p> 		<p>System Settings – Keypad LED max.</p> <p>The maximum backlight value of the keypads can be adjusted from 0 to 100.</p> <p>Default is 100</p>	<p>System Settings – Monitor Info</p> <p>The Monitor Info contains information about the Product name and firmware version.</p> <p>For list over current firmware versions see appendix B.</p> 



6.8 Serial Communication

Serial Com. – Monitor Address

<p>Main Menu</p> <ul style="list-style-type: none">Input SelectImage AdjustmentsColor AdjustmentAdv. Color SettingsScaling AdjustmentsOSD SettingsSystem SettingsSerial CommunicationLoudspeaker SettingsVideo Settings	<p>To communicate with a DuraMON WS the address has to be set between 0 and 254.</p> <p>Default is 0</p>
<p>Serial Communication</p> <ul style="list-style-type: none">Monitor AddressInterfaceDuplexData FormatRegister BaseBroadcast Backlight	
<p>Monitor Address</p> <p>0</p> <input type="text"/>	





6.9 Video settings (optional)

<p>Video Settings – Motion Processing</p>  <p>Main Menu Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings</p>  <p>Video Settings Motion Processing Sharpness Film Mode Noise Reduction Mpeg Processing Decoder Dettings</p>  <p>Motion Processing 3</p>	<p>The type of Motion Processing is defined here. If Motion Processing is set to 0 it is switched off.</p> <p>Default value is 3</p> <p><i>The Video Settings are only available when a video source is available and selected as Main Picture Channel.</i></p>	<p>Video Settings – Sharpness</p>  <p>Main Menu Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings</p>  <p>Video Settings Motion Processing Sharpness Film Mode Noise Reduction Mpeg Processing Decoder Dettings</p>  <p>Sharpness 0</p>	<p>The Sharpness of the video signal can be selected between -15 to 29.</p> <p>Default value is 0</p> <p><i>The Video Settings are only available when a video source is available and selected as Main Picture Channel.</i></p>
<p>Video Settings – Film Mode</p>  <p>Main Menu Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings</p>  <p>Video Settings Motion Processing Sharpness Film Mode Noise Reduction Mpeg Processing Decoder Dettings</p>  <p>Film Mode Off On</p>	<p>The Film Mode can be disabled/enabled here</p> <p>Default value is ON</p> <p><i>The Video Settings are only available when a video source is available and selected as Main Picture Channel.</i></p>	<p>Video Settings – Noise Reduction</p>  <p>Main Menu Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings</p>  <p>Video Settings Motion Processing Sharpness Film Mode Noise Reduction Mpeg Processing Decoder Dettings</p>  <p>Noise Reduction 2</p>	<p>The Noise Reduction level can be adjusted here between 0 and 6.</p> <p>Default value is 2</p> <p><i>The Video Settings are only available when a video source is available and selected as Main Picture Channel.</i></p>



<p>Video Settings – Mpeg Processing</p>  <p>Main Menu Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings</p>  <p>Video Settings Motion Processing Sharpness Film Mode Noise Reduction Mpeg Processing Decoder Settings</p>  <p>Mpeg Processing 0</p>	<p>The level of Mpeg Processing can be adjusted between 0 and 15.</p> <p>Default value is 0</p> <p><i>The Video Settings are only available when a video source is available and selected as Main Picture Channel.</i></p>
<p>Video Settings – Video Contrast</p>  <p>Main Menu Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings</p>  <p>Decoder Settings Video Brightness Video Contrast Video Saturation Video Hue Video Sharpness</p>  <p>Video Contrast 50</p>	<p>The Video Contrast can be adjusted from 0 to 100.</p> <p>Default value is 50</p> <p><i>The Video Settings are only available when a video source is available and selected as Main Picture Channel.</i></p>
<p>Video Settings – Video Brightness</p>  <p>Main Menu Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings</p>  <p>Decoder Settings Video Brightness Video Contrast Video Saturation Video Hue Video Sharpness</p>  <p>Video Brightness 50</p>	<p>The level of Video Brightness can be adjusted between 0 and 100.</p> <p>Default value is 50</p> <p><i>The Video Settings are only available when a video source is available and selected as Main Picture Channel.</i></p>
<p>Video Settings – Video Saturation</p>  <p>Main Menu Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings</p>  <p>Decoder Settings Video Brightness Video Contrast Video Saturation Video Hue Video Sharpness</p>  <p>Video Saturation 50</p>	<p>The Video Saturation level can be adjusted from 0 to 100.</p> <p>Default value is 50</p> <p><i>The Video Settings are only available when a video source is available and selected as Main Picture Channel.</i></p>



Video Settings – Video Hue	Video Settings – Video Sharpness
<div data-bbox="153 293 347 573"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="153 584 347 837"> <p>Decoder Settings</p> <ul style="list-style-type: none"> Video Brightness Video Contrast Video Saturation Video Hue Video Sharpness </div> <div data-bbox="153 848 347 1055"> <p>Video Hue</p> <p>50</p>  </div> <p>The Video Hue level can be adjusted from 0 to 100.</p> <p>Default value is 50</p> <p><i>The Video Settings are only available when a video source is available and selected as Main Picture Channel.</i></p>	<div data-bbox="836 293 1031 573"> <p>Main Menu</p> <ul style="list-style-type: none"> Input Select Image Adjustments Color Adjustment Adv. Color Settings Scaling Adjustments OSD Settings System Settings Serial Communication Loudspeaker Settings Video Settings </div> <div data-bbox="836 584 1031 837"> <p>Decoder Settings</p> <ul style="list-style-type: none"> Video Brightness Video Contrast Video Saturation Video Hue Video Sharpness </div> <div data-bbox="836 848 1031 1055"> <p>Video Sharpness</p> <p>0</p>  </div> <p>The Video Sharpness level can be adjusted from 0 to 100.</p> <p>Default value is 0</p> <p><i>The Video Settings are only available when a video source is available and selected as Main Picture Channel.</i></p>

7 Serial connection pin-out

Data Rate:

The monitor is configured to transmit and receive data at 19200 bits/second.

Data Format:

Data shall be transmitted with no parity, 8 data bits, one start bit, and one stop bit.

Pin	RS-232
	SUB-D 9-pol female
1	
2	Monitor TX
3	Monitor RX
4	
5	GND
6	
7	
8	
9	



8 Technical specifications DuraMON WS

DuraMON WS I/O

Video inputs:	RGB :	Analogue 0.7 Vpp positive at 75Ω, Separate sync or sync on green Generally all VESA compatible video modes are supported up to 165MHz (up to UXGA 60Hz and WUXGA 60Hz reduced blanking). Horizontal sync: 15-100 kHz (automatic) Vertical sync: 30-85 Hz up to 1280x1024 30-60 Hz up to 1920x1200
	DVI:	Generally all VESA compatible video modes are supported up to 160MHz (up to UXGA 60Hz and WUXGA 60Hz reduced blanking). Special modes supported on request.
Control inputs:		1x RS232 – for remote control

DuraMON WS Power Supply Options

Standard:	90-264Vac. 50-60Hz Input
------------------	---------------------------------

DuraMON WS Environmental Conditions

Operating Temperature:	-15 to 55 °C
Storage Temperature:	-25 to 70 °C
Relative Humidity:	8 to 90 %

DuraMON WS Approvals

CE Mark:	EN61000-6-2 & EN61000-6-4
Marine:	IACS E10 ed. 5 & IEC 60945 Ed. 4
ECDIS, Radar	IEC 61174 ed. 3, IEC 62288 ed. 1, IEC 62388 ed. 1

Specification DuraMON 26 WS

Resolution:	1920 x 1200
Active Area	550.08 mm x 343.8 mm (26.0" diagonal)
Pixel Pitch:	0.2865 mm x 0.2865 mm
View angle:	88° (L/R/T/B) (typical)
Viewing distance:	1.0 m
Luminance:	350 cd/m² (typical)
Contrast ratio:	1500:1 (typical)
Colors:	16.7 mill.
Response Time:	8 ms (GTG) (typical)
Window:	Anti-glare coated glass
Protection:	IP65 front – IP20 rear
Weight:	Approx. 12 kg
Dimensions (WxHxD):	626 mm x 463 mm x 92 mm



Specification DuraMON 26 WS SL

Resolution:	1920 x 1200
Active Area	550.08 mm x 343.8 mm (26.0" diagonal)
Pixel Pitch:	0.2865 mm x 0.2865 mm
View angle:	88° (L/R/T/B) (typical)
Viewing distance:	1.0 m
Luminance:	350 cd/m ² (typical)
Contrast ratio:	1500:1 (typical)
Colors:	16.7 mill.
Response Time:	8 ms (GTG) (typical)
Window:	Anti-glare coated glass
Protection:	IP65 front – IP20 rear
Weight:	Approx. 12 kg
Dimensions (WxHxD):	619 mm x 463 mm x 92 mm

Specification DuraMON 26 WS LED


Resolution:	1920 x 1200
Active Area	550.08 mm x 343.8 mm (26.0" diagonal)
Pixel Pitch:	0.2865 mm x 0.2865 mm
View angle:	88° (L/R/T/B) (typical)
Viewing distance:	1.0 m
Luminance:	350 cd/m ² (typical)
Contrast ratio:	1500:1 (typical)
Colors:	16.7 mill.
Response Time:	25 ms (GTG) (typical)
Window:	Anti Reflection coated front glass
Protection:	IP65 front – IP20 rear
Weight:	Approx. 12 kg
Dimensions (WxHxD):	619 mm x 463 mm x 92 mm

Specification DuraMON 27 WS ECDIS


Resolution:	1920 x 1080
Active Area	597.88 mm x 336.31 mm (27.0" diagonal)
Pixel Pitch:	0.3114 mm x 0.3114 mm
View angle:	89° (L/R/T/B) (typical)
Viewing distance:	1.08 m
Luminance:	250 cd/m ² (typical)
Contrast ratio:	1000:1 (typical)
Colors:	16.7 mill.
Response Time:	14 ms (GTG) (typical)
Window:	Anti Reflection coated front glass
Protection:	IP65 front – IP20 rear
Weight:	11.7 kg
Dimensions (WxHxD):	684 mm x 452 mm x 68 mm



9 Mechanical outline DuraMON 26 WS

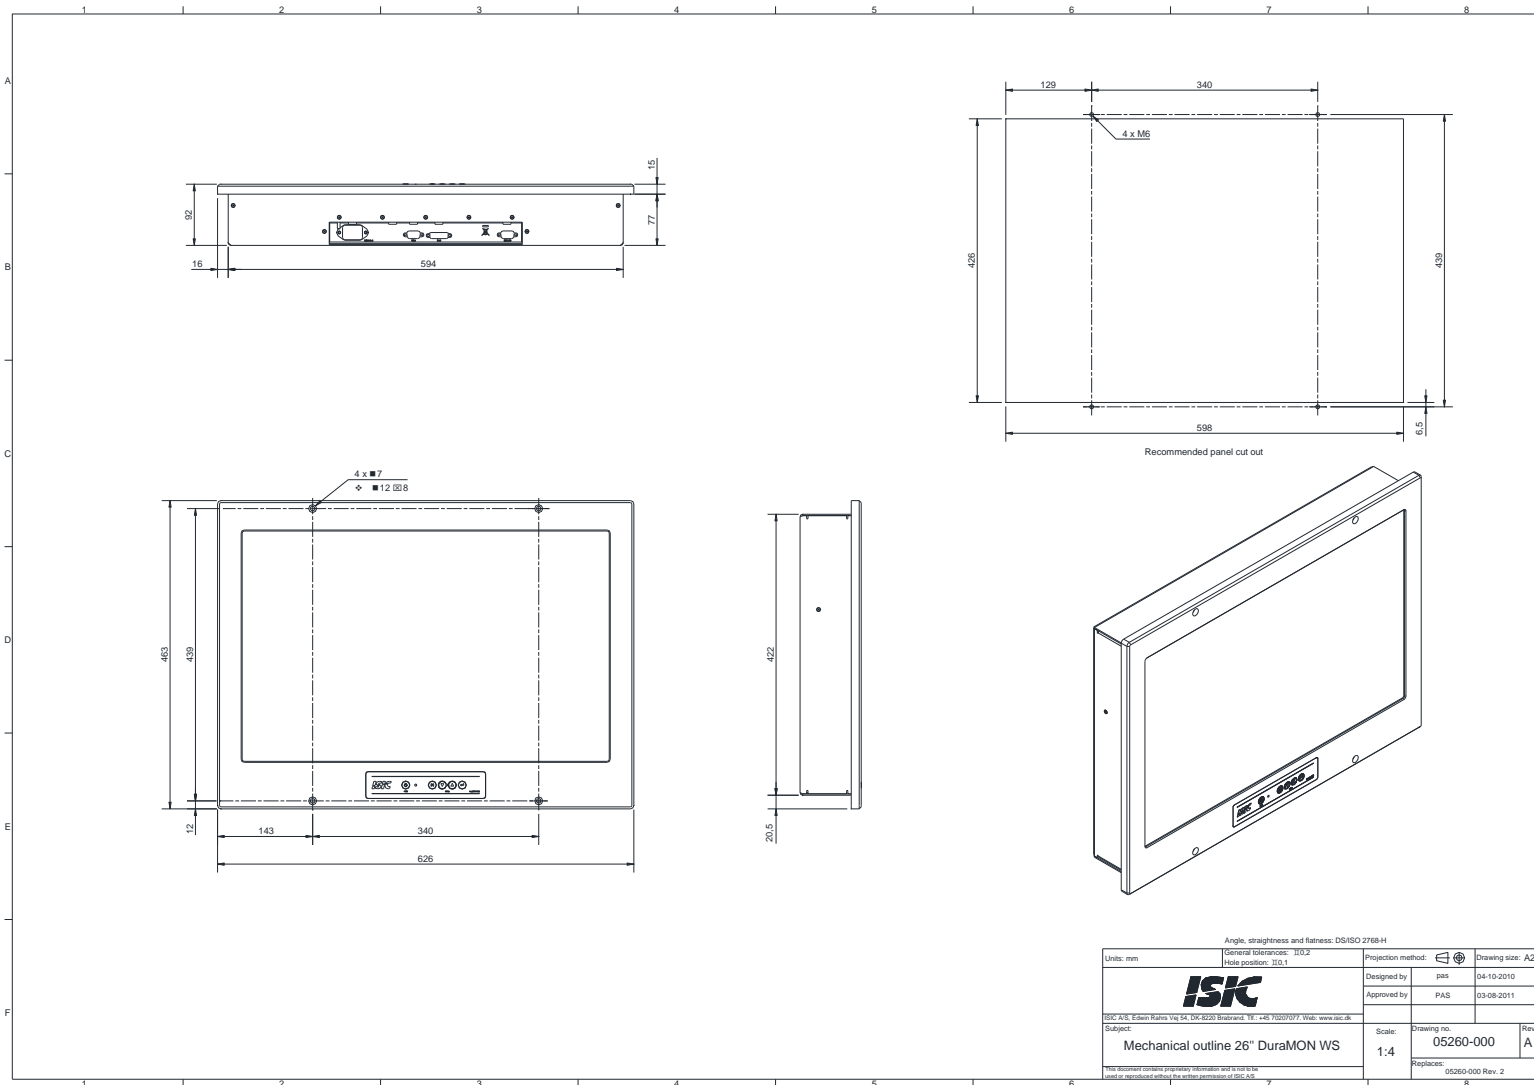


10 Mechanical outline DuraMON 26 WS SL

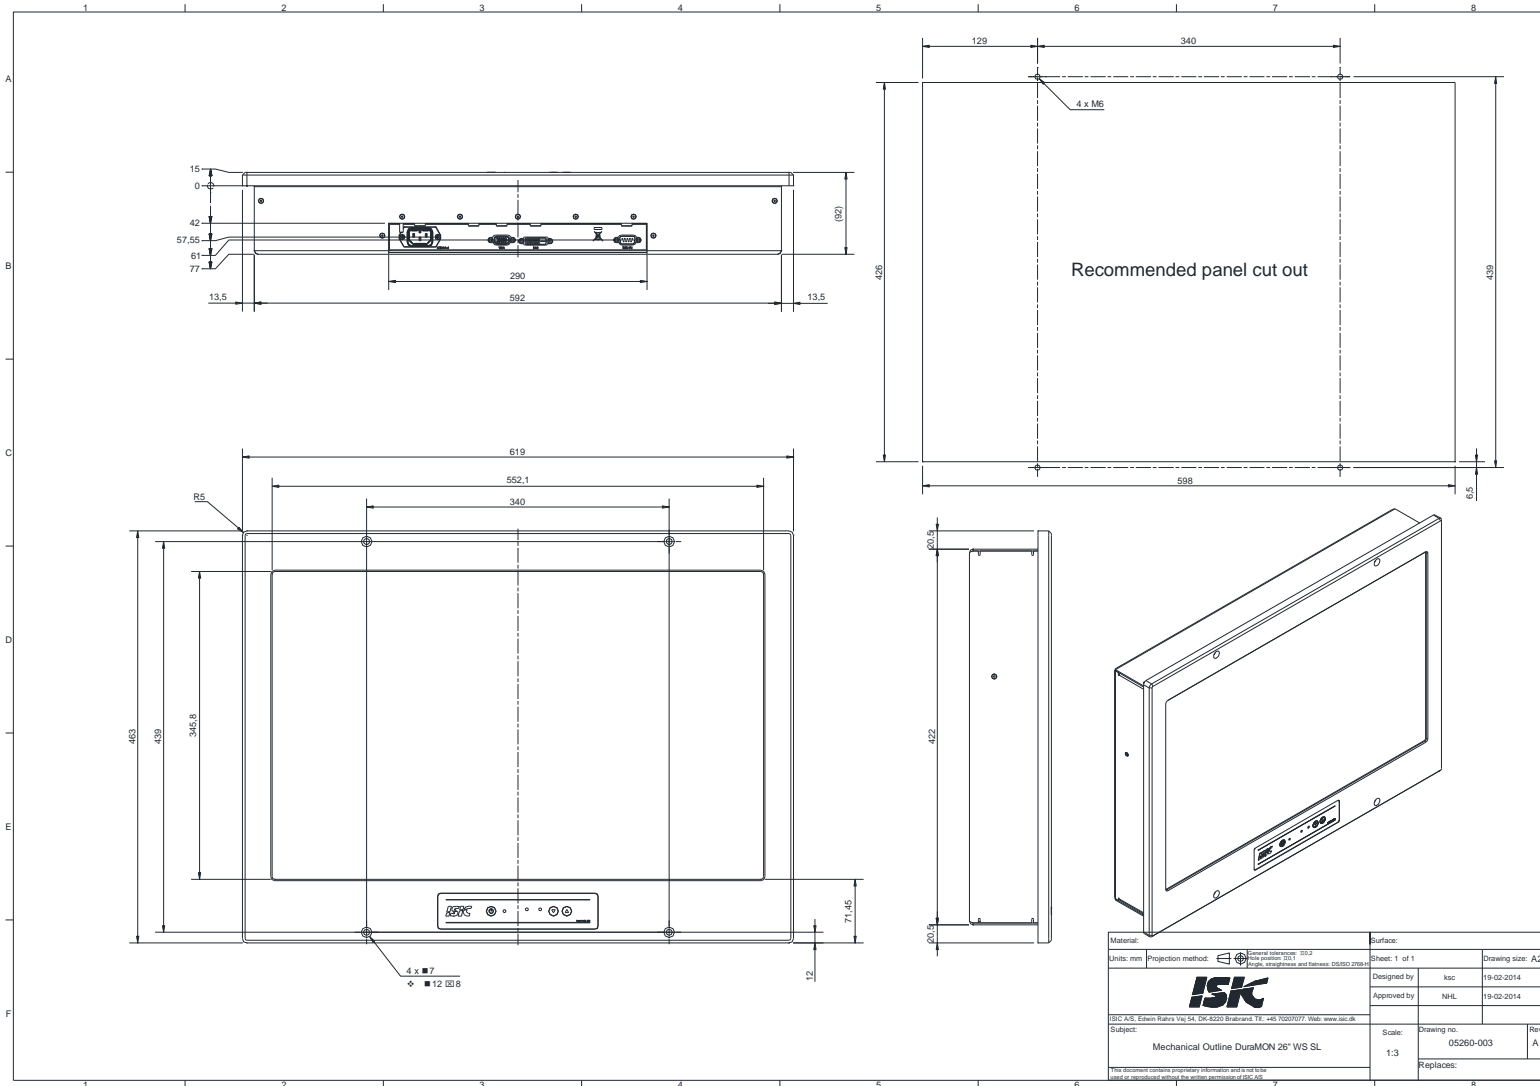

Material:		Surface:	
Units: mm	Projection method:	Sheet: 1 of 1	Drawing size: A2
		Designed by:	ksc
		Approved by:	NHL
DSC: A/S, Eghem Rørdal Væ, 64 DK-4220 Strømelev, Tl. +45 70307077 Web: www.isk.dk Subject: Mechanical Outline DuraMON 26 [®] WS SL		Scale:	Rev. A
This document contains proprietary information and is for use only as approved by the written permission of ISK A/S		Drawing no.:	05260-003
		Replaces:	




11 Mechanical outline DuraMON 26 WS LED

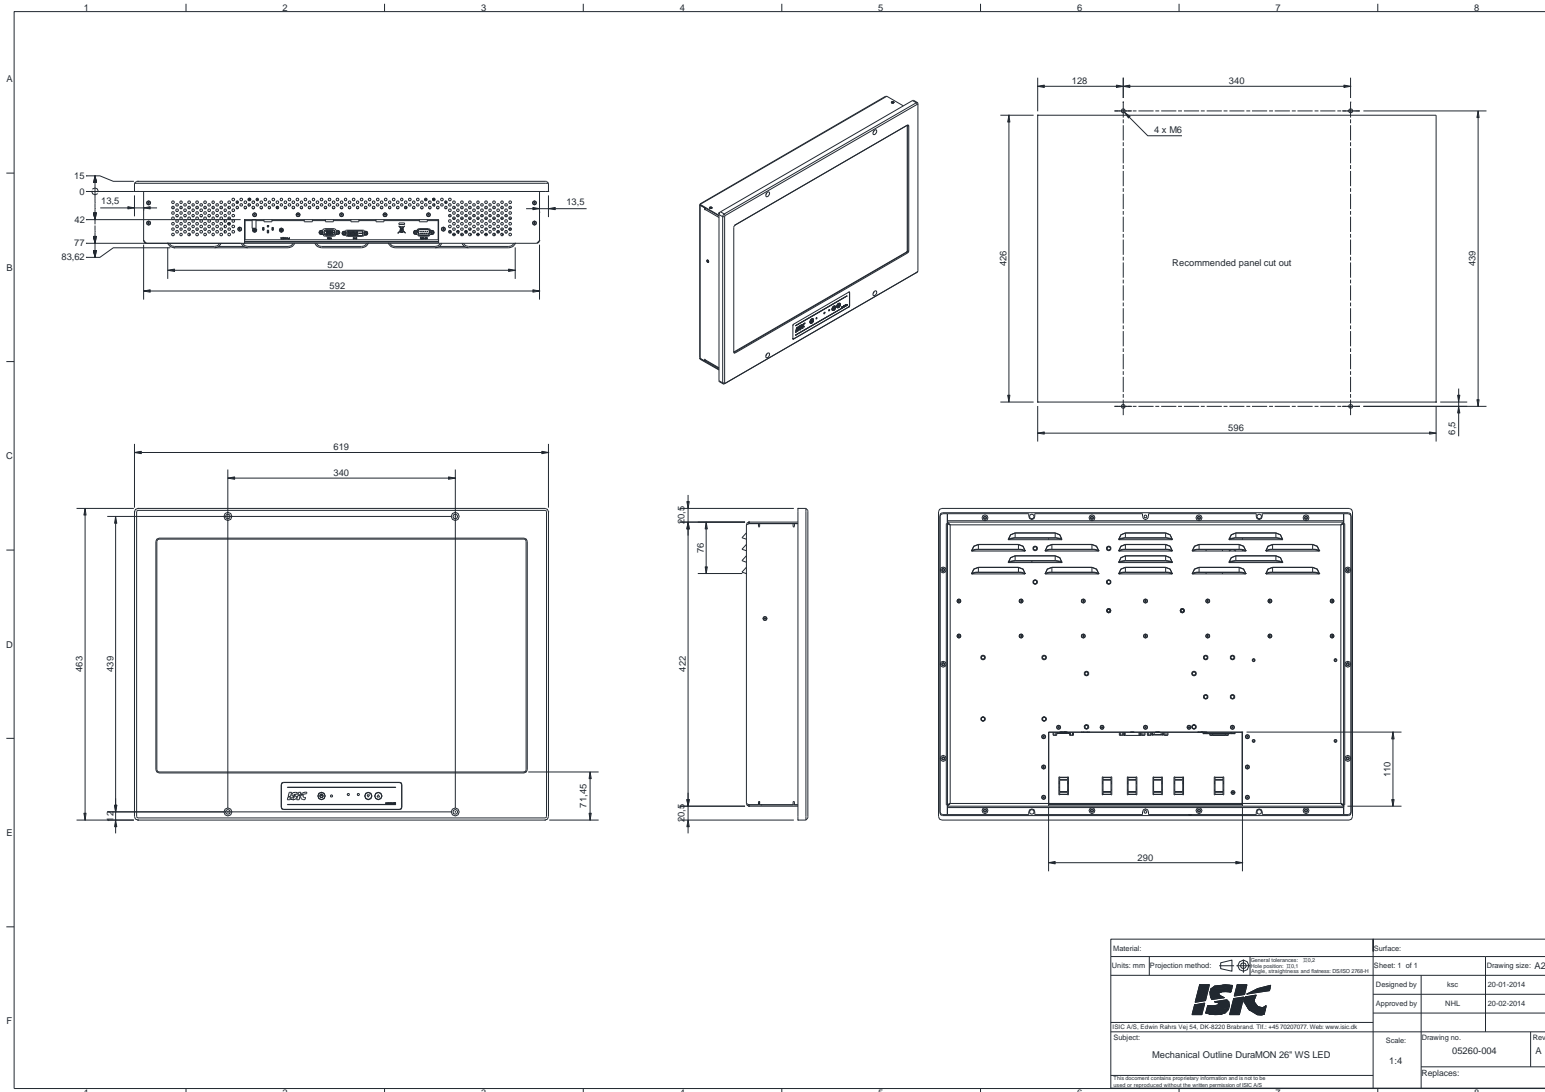


Material:	General drawing: 002	Surface:	Sheet: 1 of 1	Drawing size: A2
Units: mm	Projection method:	Revision number: 001	Designed by: ksc	20-01-2014
		Approved by: NHL	20-02-2014	
		ISK A/S, Edvin Raths Vej 54, DK-6220 Brøndby, Tlf: +45 70207077, Web: www.isk.dk		
Subject:	Mechanical Outline DuraMON 26" WS LED		Scale:	Drawing no:
This document contains proprietary information which is not to be used or reproduced without the written permission of ISK A/S.			1:4	05260-004
			Replaces:	Rev:
				A




12 Mechanical outline DuraMON 27 WS ECDIS

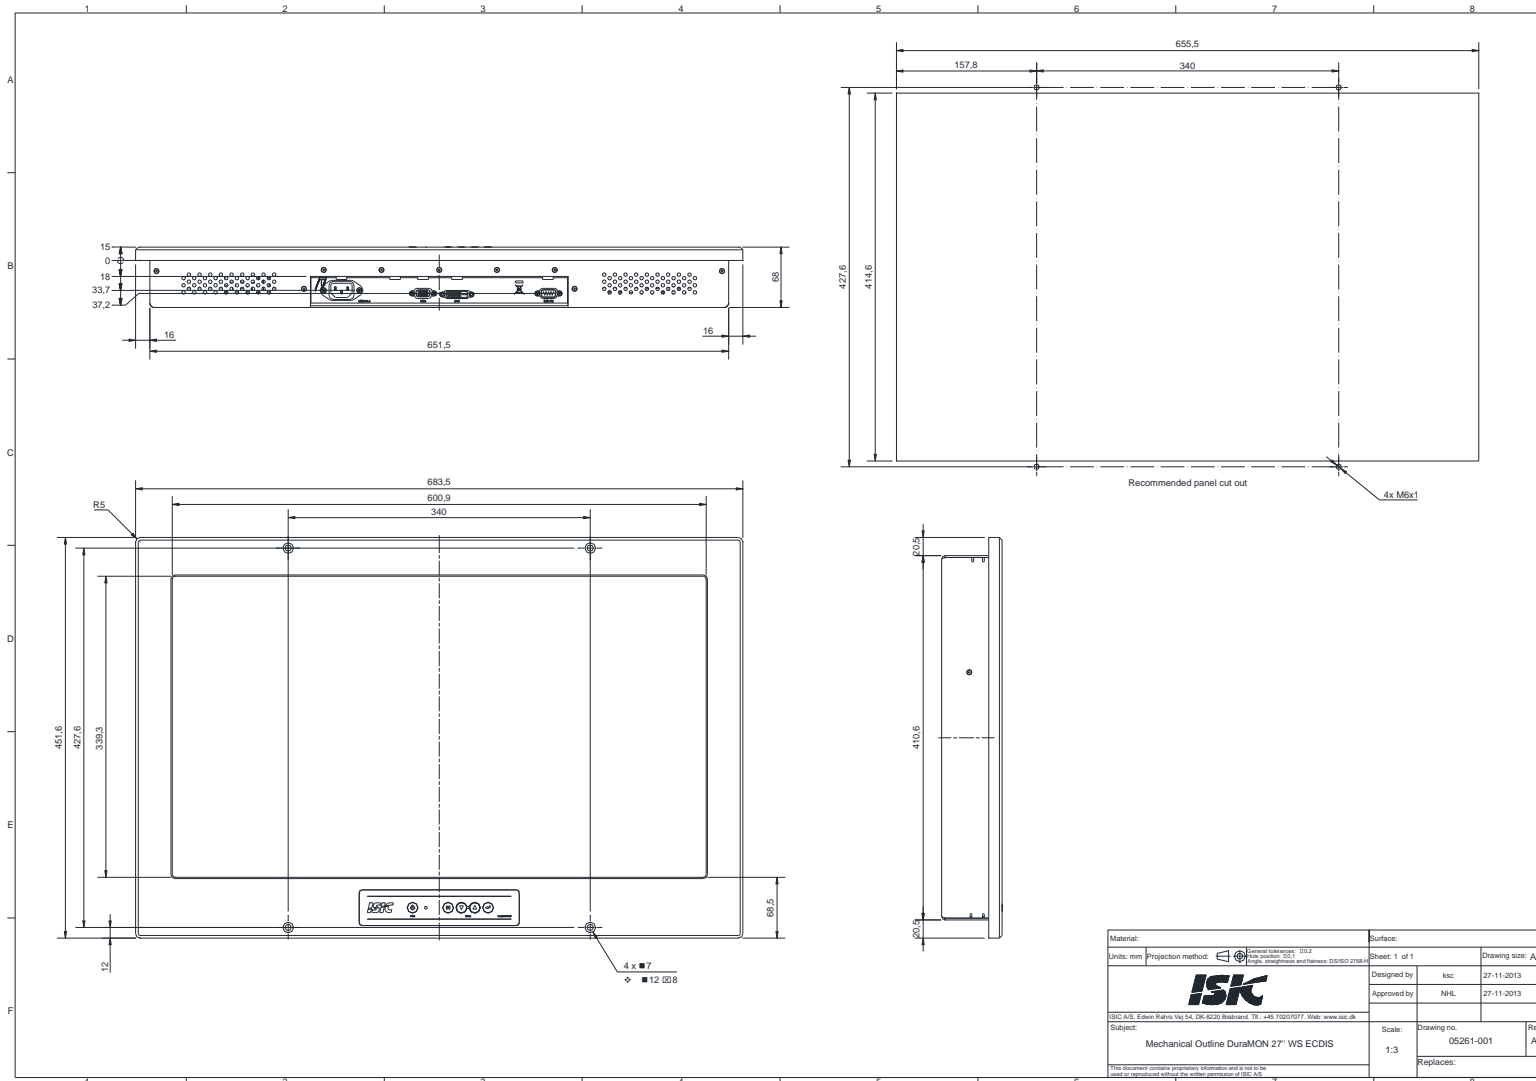


13 Mechanical outline DuraMON26WS/SL/LED bracket stand option

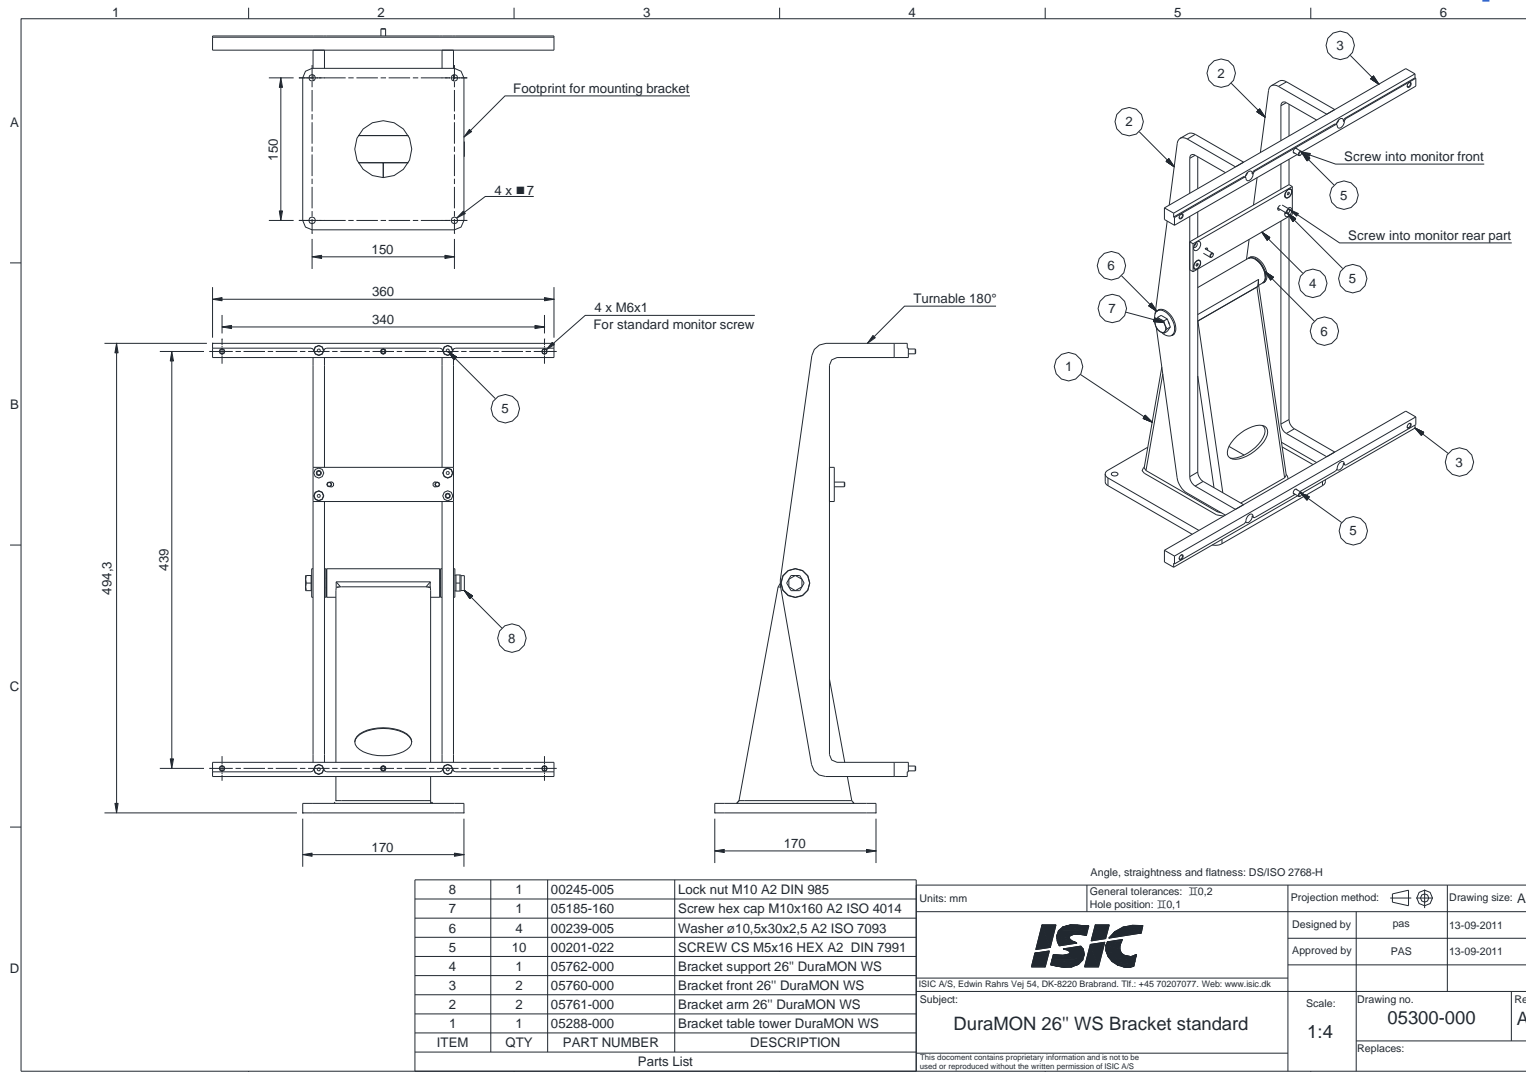

14 Mechanical outline DuraMON26WS/SL/LED bracket wallmount option

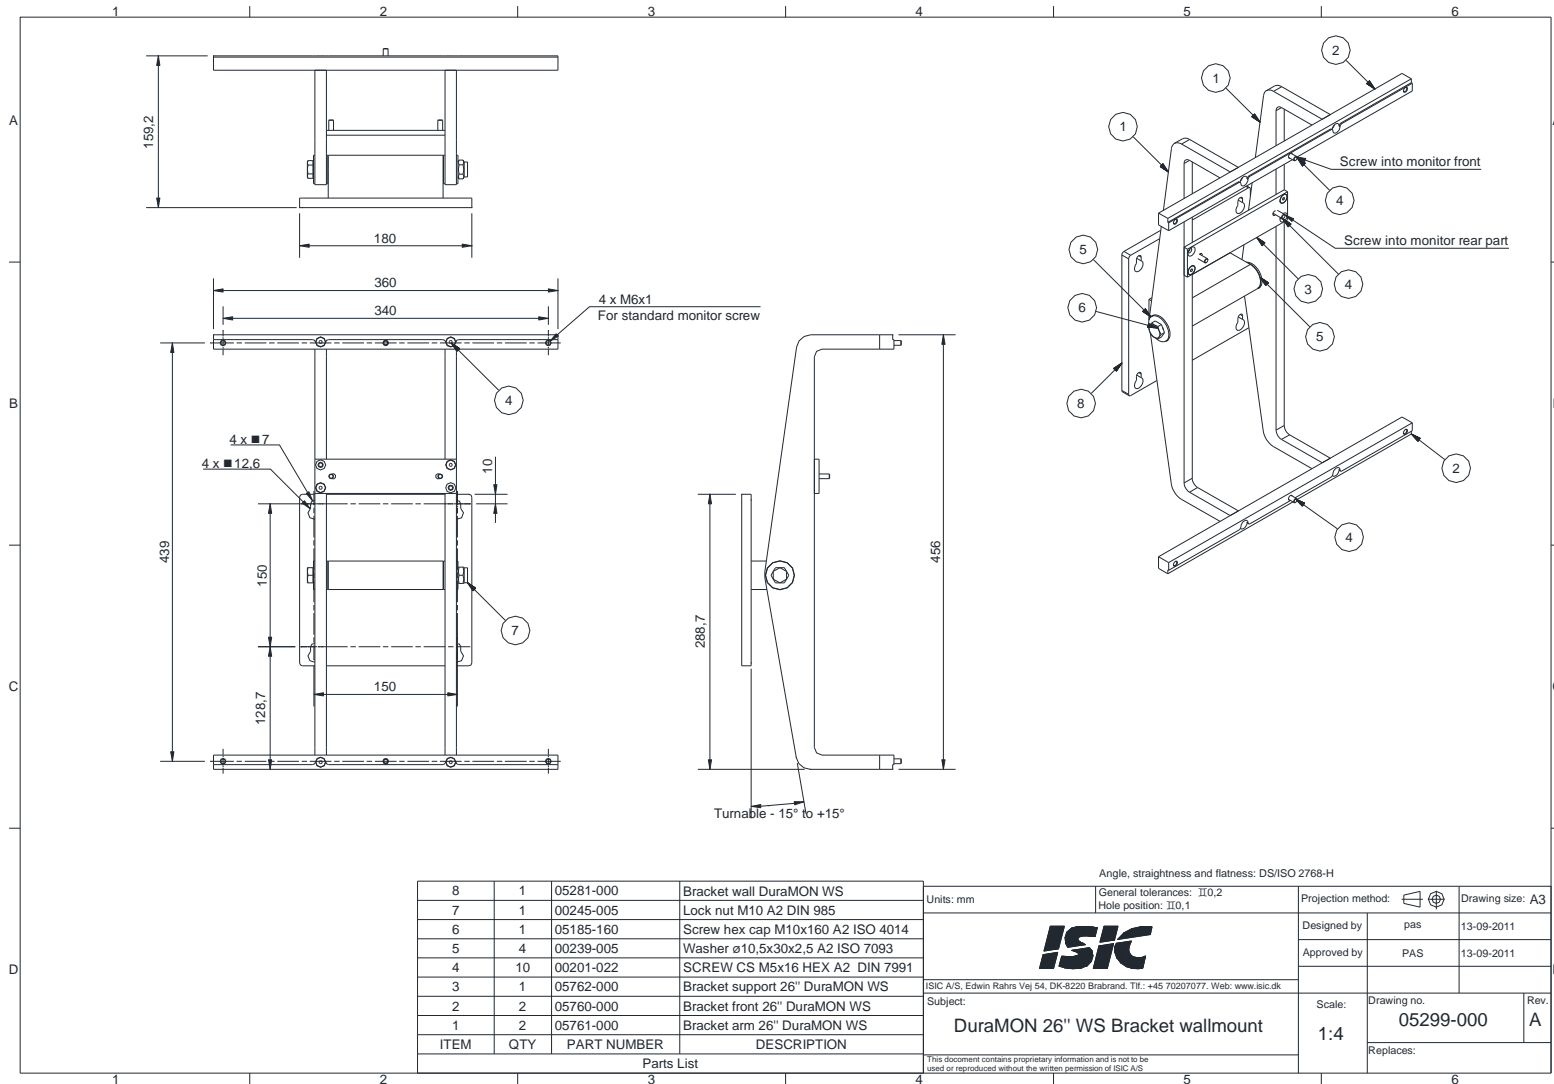

15 Mechanical outline DuraMON27 WS ECDIS bracket stand option

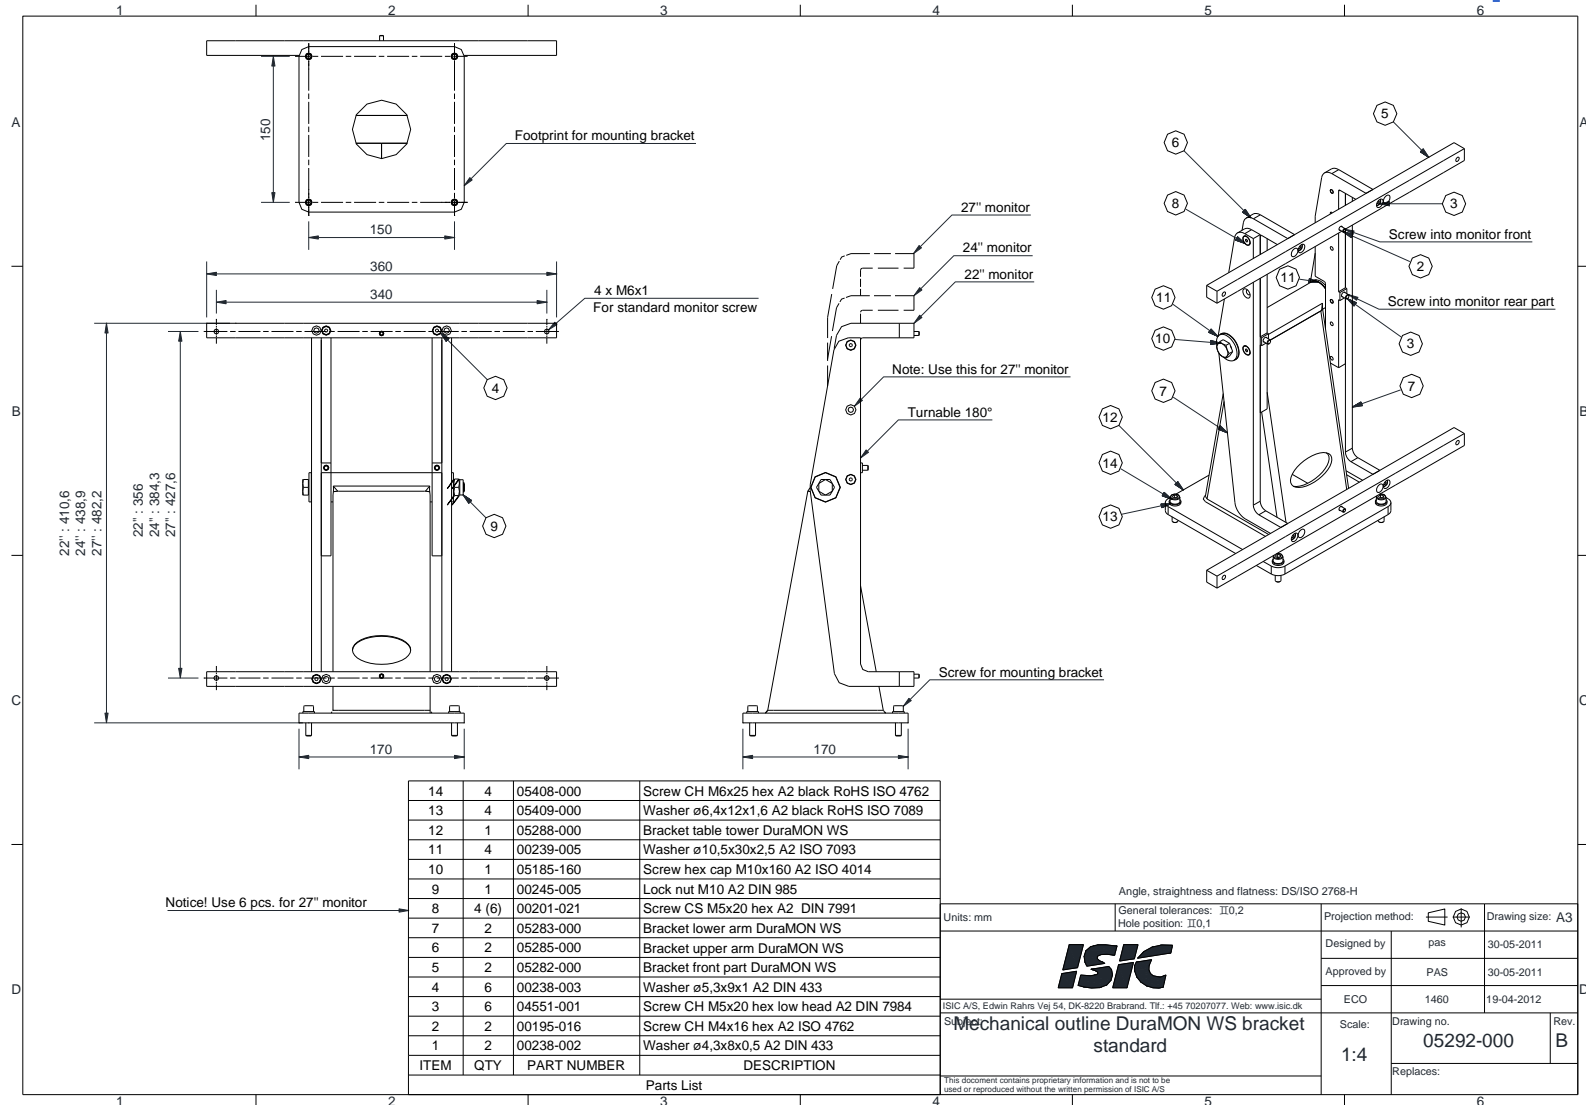

Notice! Use 6 pcs. for 27" monitor

ITEM	QTY	PART NUMBER	DESCRIPTION
14	4	05408-000	Screw CH M6x25 hex A2 black RoHS ISO 4762
13	4	05409-000	Washer ø6,4x12x1,6 A2 black RoHS ISO 7089
12	1	05288-000	Bracket table tower DuraMON WS
11	4	00239-005	Washer ø10,5x30x2,5 A2 ISO 7093
10	1	05185-160	Screw hex cap M10x160 A2 ISO 4014
9	1	00245-005	Lock nut M10 A2 DIN 985
8	4 (6)	00201-021	Screw CS M5x20 hex A2 DIN 7991
7	2	05283-000	Bracket lower arm DuraMON WS
6	2	05285-000	Bracket upper arm DuraMON WS
5	2	05282-000	Bracket front part DuraMON WS
4	6	00238-003	Washer ø5,3x9x1 A2 DIN 433
3	6	04551-001	Screw CH M5x20 hex low head A2 DIN 7984
2	2	00195-016	Screw CH M4x16 hex A2 ISO 4762
1	2	00238-002	Washer ø4,3x8x0,5 A2 DIN 433

Angle, straightness and flatness: DS/ISO 2768-H

Units: mm General tolerances: II,0,2 Projection method: Drawing size: A3
 Hole position: II,0,1

ISIC

ISIC A/S, Edwin Rahns Vej 54, DK-8220 Brabrand, Tlf: +45 70207077, Web: www.isic.dk


Mechanical outline DuraMON WS bracket standard

Designed by	pas	30-05-2011
Approved by	PAS	30-05-2011
ECO	1460	19-04-2012
Scale:	Drawing no.	Rev.
1:4	05292-000	B
Replaces:		

This document contains proprietary information and is not to be used or reproduced without the written permission of ISIC A/S



16 Mechanical outline DuraMON27 WS ECDIS bracket wallmount option

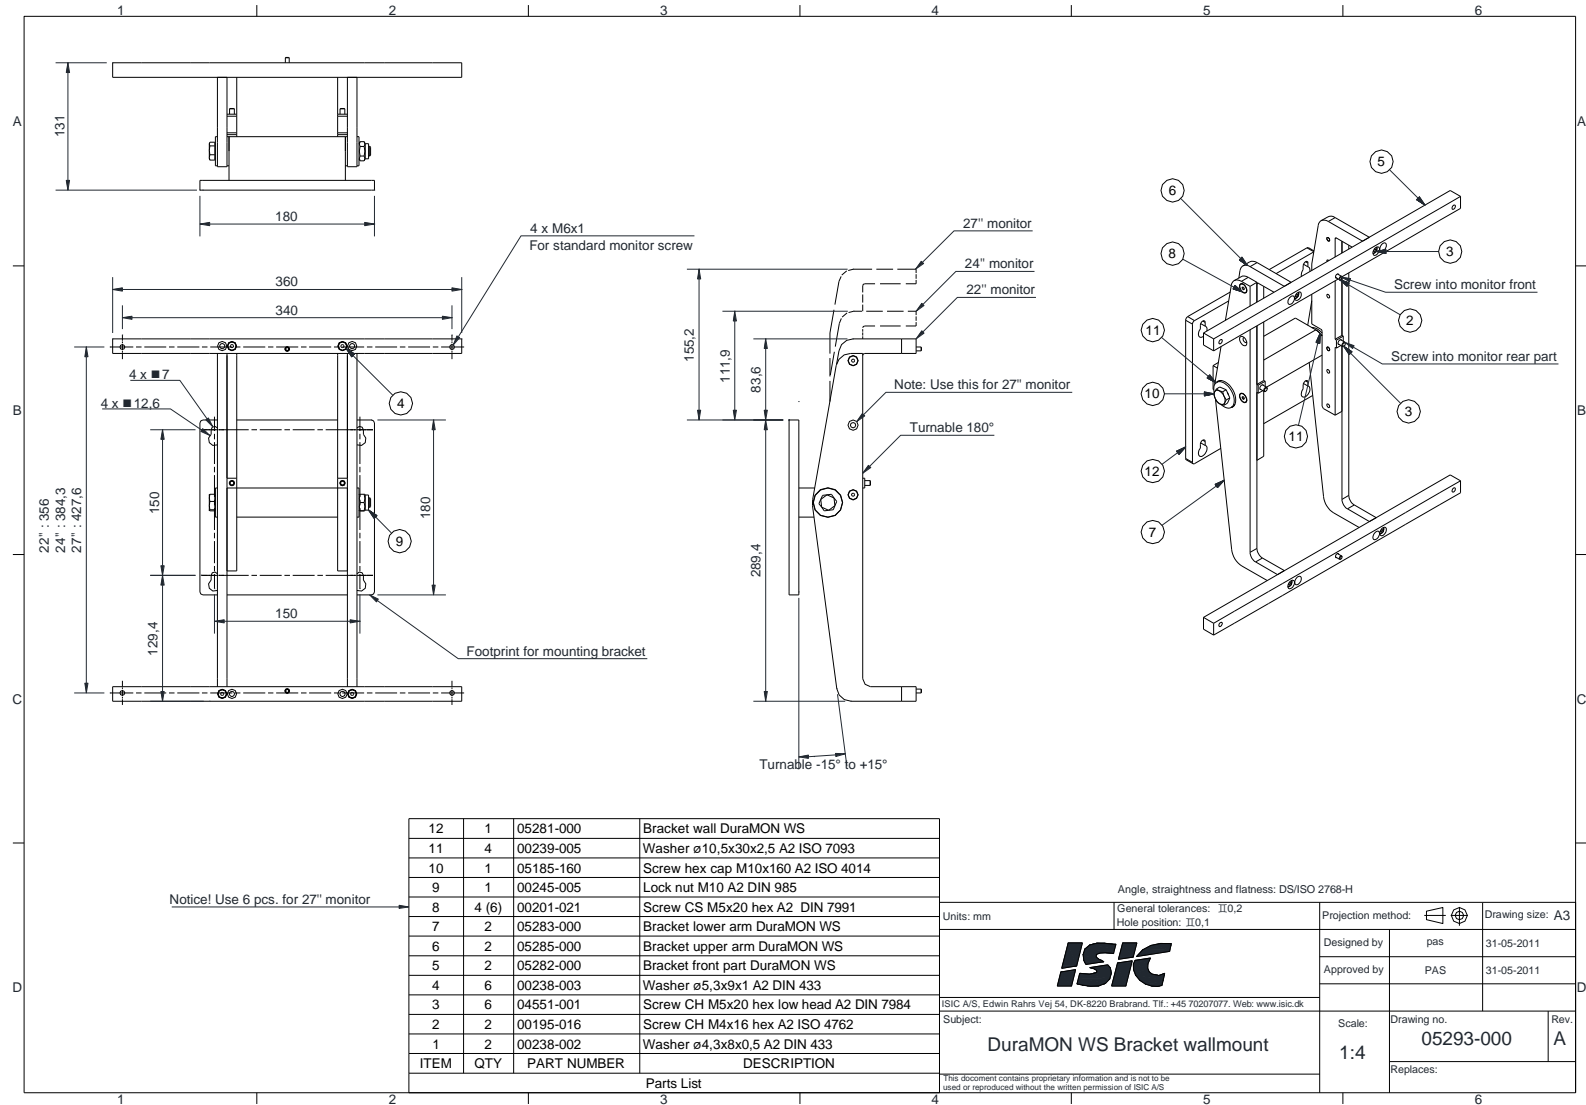

17 ECDIS mode

ECDIS warning:

Be aware that use of the backlight, brightness or contrast controls in ECDIS mode may inhibit visibility of information particularly at night!

See document no. 04924-000 for ECDIS protocol details.

18 Dura Communication protocol

See document 04924-000 for protocol details.

19 Compass safe distance

Test object / condition	Minimum Compass safe distance [cm] (5.4°/H deviation or a horizontal magnetic flux of 0.094μT)	Minimum Compass safe distance [cm] (18°/H deviation or a horizontal magnetic flux of 0.313μT)
DuraMON 26 WS	160	110
DuraMON 26 WS SL	160	110
DuraMON 26 WS LED	225	135
DuraMON 27 WS ECDIS	180	110

20 Power Consumption

Test object / condition	P _{typ} [W]	P _{max} [W]
DuraMON 26 WS	125	-
DuraMON 26 WS SL	125	-
DuraMON 26 WS LED	65	-
DuraMON 27 WS ECDIS	30	45



21 In rush current

Test object / condition	115 [VAC]		230 [VAC]	
	[Atyp]	[Amax]	[Atyp]	[Amax]
DuraMON 26 WS	30	35	65	70
DuraMON 26 WS SL	30	35	65	70
DuraMON 26 WS LED	30	35	65	70
DuraMON 27 WS ECDIS	-	-	-	100

22 Troubleshooting

Problem	Cause	Solutions
No picture on display	Backlight level set to minimum	Increase backlight
	Monitor turned off	Turn on the monitor
	No input signal present	Apply signal
	No power cord connected	Apply power
Buttons on front doesn't work	Unit in ECDIS mode	Press Menu + Enter to unlock the monitor
	No power cord connected	Apply power
	Keypad defect	Please do not try to open the unit. Send it to ISIC A/S for repair.
The unit smells burned / smoke is coming from the unit	There might be something burned inside	Please do not try to open the unit. Send it to ISIC A/S for repair.

23 Servicing the unit

In case that the unit still fails after following the troubleshooting send the unit to ISIC for repair. There are no user serviceable parts inside and to ensure ECDIS compliance the monitor has to be recalibrated at ISIC.



24 Terms, Acronyms and abbreviations

Brill	Brilliance of the display (backlight level)
Communication protocol:	Use a serial link to control various settings in the monitor
DVI:	Digital Visual Interface
ECDIS:	Electronic Chart Display and Information System
FW:	Firmware
GTG:	Grey to Grey
IF:	Interface card
IP20:	International Protection Rating (protected against objects with a size larger than 12.5mm)
IP65:	International Protection Rating (dust tight and protected against water jerks)
OSD:	On Screen Display
TBD:	To be defined
VGA:	Video Graphics Array



25 ISIC info / Support

In case you have inquiries or problems with your DuraMON WS, you have a number of possibilities to get support.

Company name:	ISIC A/S
Head office:	Edwin Rahrs Vej 54 DK – 8220 Brabrand Denmark
Shipping address:	Holmstrupgaardvej 5 DK-8220 Brabrand Denmark
Telephone:	+45 70 20 70 77
Fax:	+45 70 20 79 76
Mail:	mail@isic-systems.com
www:	www.isic-systems.com
VAT number:	DK 16 70 45 39
Bank Name/Address:	Handelsbanken A/S Havneholmen 29 DK – 1561 København V Denmark
Bank Code:	0892
SWIFT:	HANDDKKK
IBAN for DKK:	DK53 0892 0001 0159 69
IBAN for EUR:	DK48 0892 0003 0026 19
IBAN for USD:	DK26 0892 0003 0026 27
Contacts: RFQ's:	By fax to +45 70 20 79 76 By mail to sales@isic-systems.com
Orders:	By fax to +45 70 20 79 76 By mail to orders@isic-systems.com
Support:	Via homepage www.isic-systems.com under aftersales By mail to service@isic-systems.com During office-hours (Mo-Fr: CET 0800 - 1600) at +45 70 20 70 77
Service:	Before shipment for service Request Return Material Authorization number at homepage www.isic-systems.com under RMA By mail to service@isic-systems.com



26 Revision history

Rev A	July 2011	First release
Rev B	Dec 2013	DuraMON27WS ECDIS added DuraMON26WS SL added Optional connections added to chapter 3 Appendix A update Appendix B and C added
Rev C	Jan 2014	DuraMON26WS LED added Bracket outline added
Rev D	Feb 2014	Mechanical outline for DuraMON26WS SL and DuraMON26WS LED updated



27 Appendix A: Pixel policy

ISO 9241-307:2008 guidelines for LCD pixel defects

Introduction

TFT displays consist of a set number of pixels. Each pixel consists of 3 sub-pixels also called dots (one red, one blue and one green). Every sub-pixel is addressed by its own transistor. As a result, the manufacturing of glass substrate is very complex.

Due to the nature of this manufacturing process, occasional defects can occur. Pixel defects or failures cannot be fixed or repaired and may occur at any stage during the service life of the TFT display.

To regulate the acceptability of defects and protect the end user, ISIC A/S complies with the ISO 9241-307:2008 standard. This standard recommends how many defects are considered acceptable in a display, before it should be replaced within the terms of the warranty.

Monitor classification

ISO 9241-307:2008

Allowed defects per type per million pixels						
Defect classes	Pixel defects			Cluster defect		
	Type 1	Type 2	Type 3 total ($2 \times N_{3a} + N_{3b}$)	Type 1	Type 2	Type 3
Class: 0	0	0	0	0	0	0
Class: I	1	1	5	0	0	0
Class: II	2	2	10	0	0	1
Class: III	5	15	100	0	0	5

ISIC TFT monitors comply with ISO 9241-307:2008 Class II.

Special agreements about other classifications can be made between ISIC A/S and the customer.

Measurement method/monitoring conditions for pixel defects

In compliance with the ISO-9241-307:2008 standard, the following conditions are observed:

- Final check for pixel fault undertaken right after burn-in, i.e. with pre-heating of the display.
- Surrounding temperature $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$
- Relative air humidity 40–70%

Pixel definition


Every pixel consists of three sub-pixels/dots (red, blue, green).

Every sub-pixel has its own transistor.


The three sub-pixels/dots must be considered as one unit.




Pixel




Pixel defect type 1 Pixel constantly lit



Pixel defect type 2 Pixel constantly dark




Pixel defect type 3a
Sub-pixel/dot (red, blue, green) constantly lit




Pixel defect type 3b
Sub-pixel/dot (red, blue, green) constantly dark

Cluster

A cluster consists of 5 x 5 pixels.



Cluster pixel defect type 1
Pixels in a cluster area constantly lit



Cluster pixel defect type 2
Pixels in a cluster area constantly dark



Cluster pixel defect type 3a
Sub-pixels/dots in a cluster area constantly lit



Cluster pixel defect type 3b
Sub-pixels/dots in a cluster area constantly dark



Pixel faults accepted by ISiC A/S

The maximum number of pixel faults that is considered acceptable at different screen resolutions is shown in the table below.

This is the native resolution and not the resolution as adjusted by user.

Class II

Allowable number of pixel faults in monitor applications							
Screen type	Native resolution	Number of pixels	Pixel defect type 1	Pixel defect type 2	Pixel defect Type 3 total ($2 \times N_{3a} + N_{3b}$)	Cluster defect type 1 and 2	Cluster defect type 3
XGA	1024x768	768,432	1	1	7	0	0
SXGA	1280x1024	1,310,720	2	2	13	0	1
UXGA	1600x1200	1,920,000	3	3	19	0	1
FHD	1920x1080	2,073,600	4	4	20	0	2
WUXGA	1920x1200	2,304,000	4	4	23	0	2



28 Appendix B: Latest firmware versions

DuraMON 26 WS / SL
OSD FW 05316-000 REV C : IF FW 04837-000 REV K
OSD FW 05316-001 REV C : IF FW 04837-101 REV A
OSD FW 05316-003 REV G : IF FW 04837-000 REV K
OSD FW 05316-102 REV B : IF FW 04837-101 REV A

DuraMON 26 WS LED
OSD FW 05316-100 REV A : IF FW 04837-001 REV A

DuraMON 27 WS ECDIS
OSD FW 06078-000 REV A : IF FW 04837-001 REV A



29 Appendix C: Declaration of Conformity



DECLARATION OF CONFORMITY

We, manufacturer

ISIC A/S

Edwin Rahrs Vej 54, DK-8220 Brabrand, Denmark

hereby certifies that the

Products:

Category: Marine Display

Type: DuraMon WS

Models: 22", 24", 26" and 27".

ISIC Part Nos.: 05222-XXX, 05224-XXX, 05226-XXX,
05227-XXX and 05323-XXX

are designed, manufactured and tested in Denmark, and complies with the requirements in the following directives and standards:

**2004/108/EC EMC Directive
IEC 60945:2002
IACS E10:2006**

Actual inspection/test data are on file and can be subject for examination.

These displays are for use in maritime installations only

30 August 2013


Edwin Rahrs Vej 54 DK-8220 Brabrand
Tlf. +45 7020 7077
Fax +45 7020 7976


Bo Lander Rasmussen, CEO

03029-008 rev. B





SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

The ISIC logo consists of the letters "ISIC" in a bold, blue, sans-serif font. The letter "I" is stylized with a white diagonal slash through it.

Edwin Rahrs Vej 54

DK-8220 Brabrand

Denmark

Web: <http://www.isic-systems.com>

Email: service@isic-systems.com

The ISIC logo consists of the letters "ISIC" in a bold, blue, sans-serif font. The letter "I" is stylized with a white diagonal slash through it.