



**Pavone Sistemi**  
pesatura elettronica industriale



## MOBILE WEIGHING

crane scales

CS09

Minimum reduction of ??the crane area

Adjustable light intensity

Capacity: 12, 17, 25, 35 e 55t

Structure in stainless steel

IP67

Digital calibration

Programmable digital filter


Infrared remote control (standard)

Predisposition for radio interface, for PC or indicator / remote terminal and printer

### TECHNICAL CHARACTERISTICS CS09

|                       |                                               |
|-----------------------|-----------------------------------------------|
| Display:              | 40 mm, DOT red LED                            |
| Light intensity:      | Adjustable                                    |
| Galvanized shackles:  | serial                                        |
| Precision:            | +/- 0.03% on R.L.                             |
| Keyboard:             | Waterproof, 5 keys                            |
| Filter:               | Programmable digital set up                   |
| Voltage:              | Recergable battery. Charger 230 Vac 50 Hz     |
| Telecontrol:          | serial                                        |
| Calibration:          | Programmable digital set up by keyboard or Pc |
| Temperature range:    | -10/+40°C                                     |
| Degree of protection: | IP67                                          |



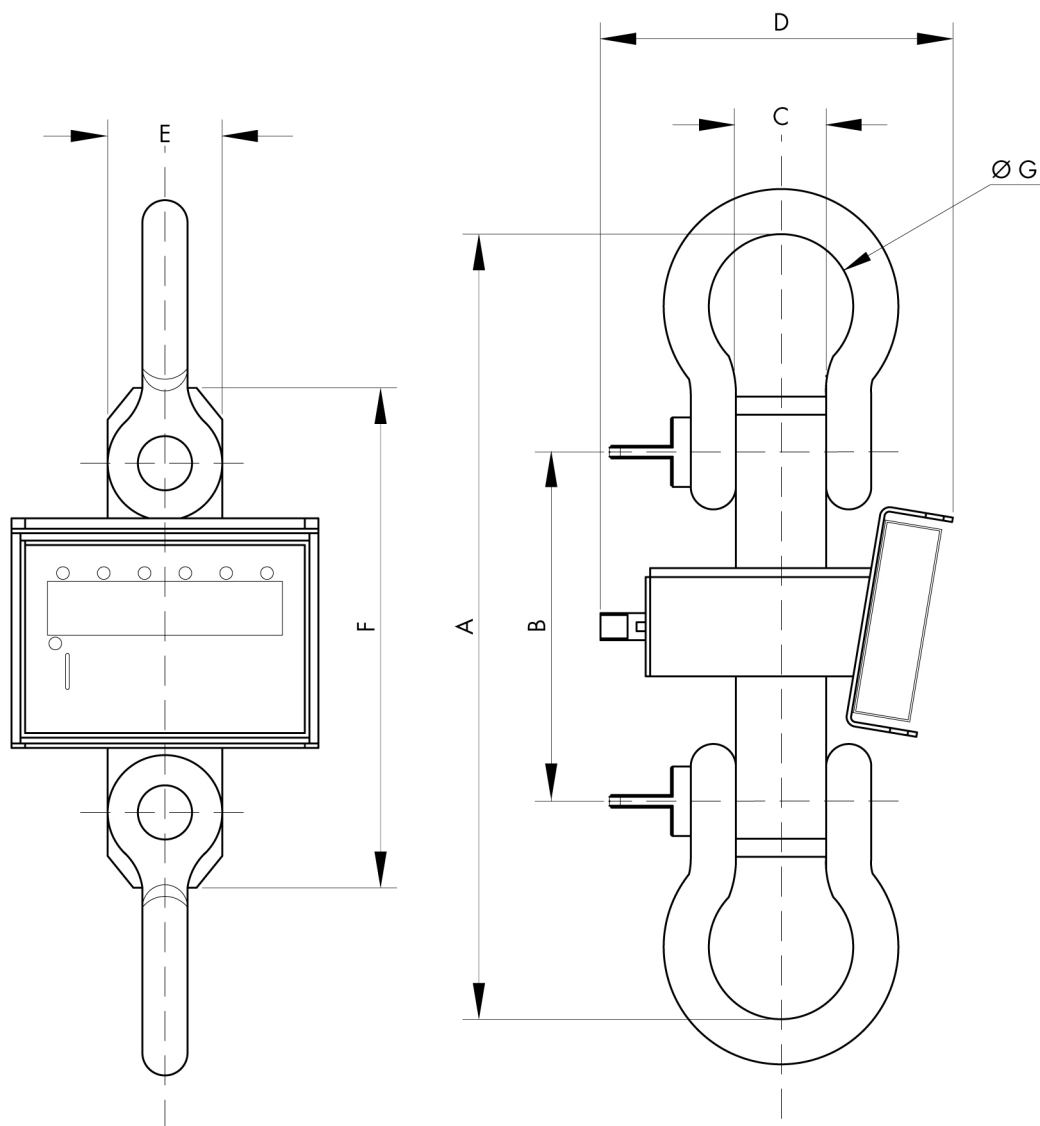

| MODEL   | WEIGHT | A    | B   | C   | D     | E   | F   | G   |
|---------|--------|------|-----|-----|-------|-----|-----|-----|
| CS09T12 | 26     | 451  | 186 | 52  | 272,5 | 100 | 270 | 83  |
| CS09T17 | 36     | 592  | 220 | 61  | 272,5 | 100 | 320 | 98  |
| CS09T25 | 53     | 640  | 290 | 75  | 272,5 | 100 | 400 | 130 |
| CS09T35 | 70     | 730  | 280 | 82  | 272,5 | 105 | 400 | 130 |
| CS09T55 | 140    | 1350 | 350 | 105 | 292.5 | 130 | 620 | 180 |







**Pavone Sistemi**  
pesatura elettronica industriale

## MOBILE WEIGHING

crane scales

CS09

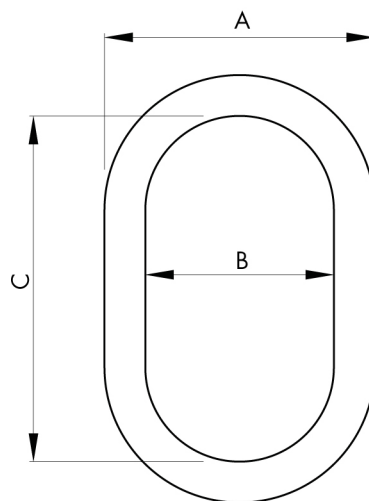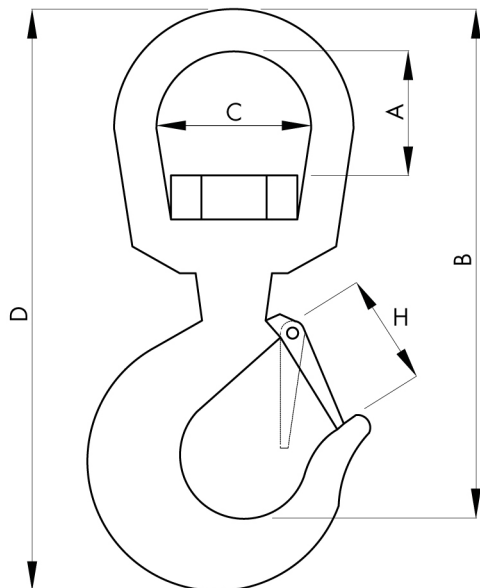

### ACCESSORI OPZIONALI

| CODE | RANGE | A   | B   | C   | D   | H  |
|------|-------|-----|-----|-----|-----|----|
| GG15 | 15 t  | 95  | 354 | 96  | 455 | 63 |
| GG22 | 22 t  | 121 | 432 | 120 | 565 | 80 |
| GG30 | 30 t  | 133 | 568 | 139 | 667 | 88 |

| CODE | RANGE | A   | B   | C   |
|------|-------|-----|-----|-----|
| GG15 | 15 t  | 174 | 110 | 200 |
| GG22 | 30 t  | 270 | 180 | 340 |
| GG30 | 40 t  | 292 | 190 | 350 |

**SCIENCE  
GATE**  
Your Automation Partner



### SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: [sales@scigate.com.sg](mailto:sales@scigate.com.sg)

Web: [www.scigate.com.sg](http://www.scigate.com.sg)

Business Hours: Monday - Friday 8.30am - 6.15pm

