



Pavone Sistemi
pesatura elettronica industriale



PLATFORMS

single cell

PMEI

Electronic platforms in stainless steel
Small and medium capacity
Accurate and robust
Standard version with approved load cell

TECHNICAL CHARACTERISTICS PMEI

Degree of protection:	IP65
Power Supply (max):	15Vdc
Shielded cable for connection to indicator	
Support column for indicator	on request
Calibration service platform with weight indicator	on request
CE-M 3000e:	always in touch with the calibration service (on request)
Plan:	in stainless steel

Structure in tubular stainless steel, adjustable feet and level bubble

Operation with load cell type 350 Ohm "single point" in aluminum, stainless steel airtight enclosure, approved according to OIML R60 C3 (3000 divisions)







Pavone Sistemi
pesatura elettronica industriale

PLATFORMS

single cell

PMEI

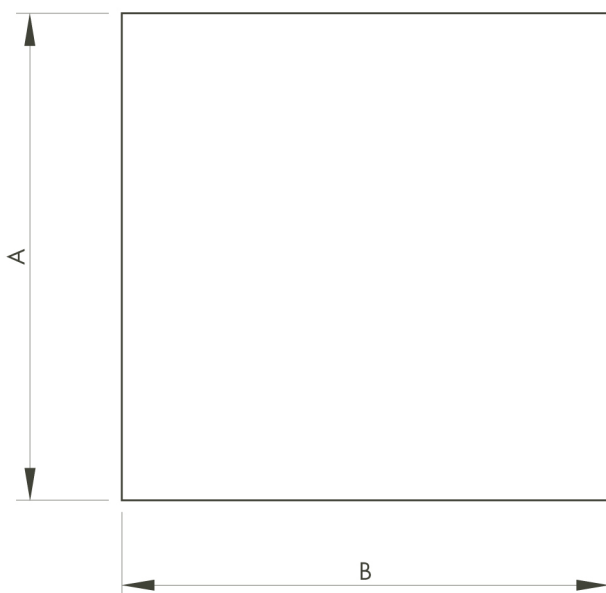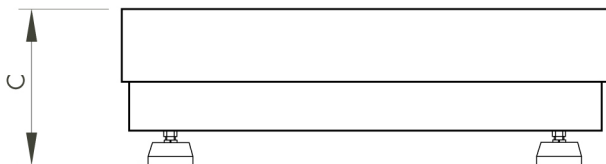

TYPE	CAPACITY (kg)	DIV. (g)	A	B	C
PMEIO	6-15-30	2-5-10	300	300	130
PMEI1	30-60-150	10-20-50	400	400	140
PMEI2	60-150-300	20-50-100	600	600	150
PMEI3	300-600	100-200	800	800	165

**SCIENCE
GATE**
Your Automation Partner



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

