

# EchoPulse® LR25

Pulse Radar Liquid Level Transmitter



## Application

The general purpose 6.3 GHz. pulse radar transmitter provides continuous level measurement up to 114.8' (35m) with a 4-20 mA signal output, and is configured via its integral push button display module. The non-contact liquid level sensor is intended for chemical and petroleum storage or process applications in above grade metal or reinforced concrete tanks or below grade tanks of any material. Select this sensor for harsh process conditions with corrosive or low dielectric media, heavy surface foam or agitation, higher pressure, steam, condensation or vapor, and installation in a flange fitting. Due to the wider beam angle, special attention should be given to ensure that the sensor is located with unobstructed measurement space. Typical applications include process tanks.



## Features

- 316L antenna with PTFE inner shield for corrosive media
- Simple configuration via integral push button display module
- 6.3 GHz. pulse radar is unaffected by most foam and agitation
- 12" (30cm) dead band enables utilization of the entire tank
- LCD displays level in feet or meters with percent of span bar
- Optional display mode indicates the echo signal return curve
- Auto-temperature compensation for accurate measurement
- Fail-safe diagnostics with selectable signal fail-safe outputs
- Recognition, storage and rejection of false echo signal returns
- Rugged IP67 aluminum enclosure with polycarbonate window



LR25-0310-40 Shown

## Success

Based upon the type of inflow and system design, not all wastewater neutralization processes are the same. Here, a LR25 is mounted on a 12' neutralization tank with agitation, foam and vapor. Its wide beam, low frequency, 6 GHz. pulse radar measurement is unaffected by most process conditions, and is the right choice for difficult applications where other level sensors may not perform.



# EchoPulse® LR25


Pulse Radar Liquid Level Transmitter



## Specifications

<b>Range:</b>	12" to 114.8' (30cm to 35m)
<b>Frequency:</b>	6.3 GHz.
<b>Accuracy:</b>	± 10mm
<b>Dead band:</b>	12" (30cm)
<b>Beam angle:</b>	20°
<b>Configuration:</b>	Push button
<b>Memory:</b>	Non-volatile
<b>Display type:</b>	LCD, dot matrix
<b>Display units:</b>	Feet and meters
<b>Display bar:</b>	Percent of span
<b>Display graph:</b>	Echo signal curve
<b>Supply voltage:</b>	16-26 VDC
<b>Max. consumption:</b>	22.5 mA
<b>Signal output:</b>	4-20 mA, two-wire
<b>Signal invert:</b>	4-20 mA, 20-4 mA
<b>Signal fail-safe:</b>	3.9 mA, 20.5 mA, 22 mA
<b>Process temp.:</b>	F: -40° to 266° C: -40° to 130°
<b>Temp. comp.:</b>	Automatic
<b>Storage temp.:</b>	F: -40° to 176° C: -40° to 80°
<b>Pressure:</b>	-14.5 to 580 psi (-1 to 40 bar)
<b>Enclosure rating:</b>	IP67
<b>Encl. material:</b>	Aluminum w/silicone gasket
<b>Encl. window mat.:</b>	Polycarbonate
<b>Conduit entrance:</b>	(1) 1/2" NPT connector (1) M20 x 1.5 plug
<b>Antenna material:</b>	316L w/PTFE inner shield
<b>Process mount:</b>	- 40: 4" flange (ANSI) - 60: 6" flange (ANSI)
<b>Classification:</b>	General purpose
<b>Certification:</b>	cTUVus FCC
<b>Compliance:</b>	CE, CRN, RoHS

## Dimensions

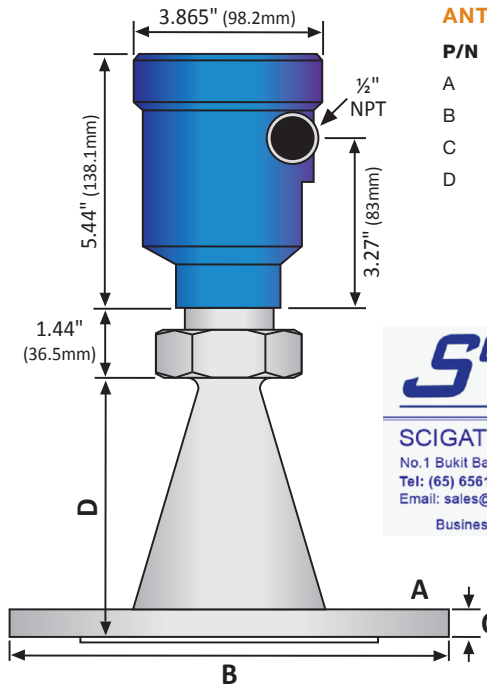

### ANTENNA / FLANGE

P/N	-40	-60
A	4" ANSI	6" ANSI
B	9.0" (228.6mm)	11.0" (279.4mm)
C	0.57" (14.5mm)	0.63" (16.1mm)
D	5.7" (145mm)	9.7" (247.7mm)



## Compatible Products



LI25

**DATALOOP™**

Level Indicator



LI55

**DATAVIEW™**

Level Controller

## Ordering

LR25-0310-  0

### FLANGE SIZE (1)

4	4" ANSI
6	6" ANSI



## NOTES

- 1) If you want help in selecting a sensor for your application, please go to our website and submit a Level Questionnaire. An engineer will review your requirements and suggest a product solution via email.