

Panel Cutout Adapter(CA4-ATM10-01) Installation Guide

Introduction

This product is a conversion kit for replacing the current display unit manufactured by Pro-face with a display unit that has smaller panel cutout dimensions.

Before	After
W 301.5 x H 227.5 mm (W 11.87 x H 8.96 in.)	W 259 x H 201 mm (W 10.20 x H 7.91 in.)

Packing List

Attachment x1
Attachment gasket x1
M4 Hex nut x10 (two spares)

Item	Specified Values
Protective Construction	Protection: Equivalent to IP65 (Front face of installed unit)
Weight	0.45 kg (0.99 lb) or less (Attachment only)
External Dimensions	W 317 x H 243 x D 17 mm (W 12.48 x H 9.57 x D 0.67 in.)
Color	Silver metallic
Material	Steel plate

A global code is assigned to every Pro-face product as a universal model number.
For more information on product models and their matching global codes, please refer to the following URL.
<http://www.pro-face.com/product/globalcode.html>

Installation Procedures

- Step 1. Confirm the display unit (1), four installation fasteners (5) and installation gasket (2) are present.
- Step 2. Make sure that the installation gasket is fitted properly to the display unit.
- Step 3. Install the attachment gasket (4) to the attachment (3) correctly.
- Step 4. Attach the display unit to the attachment prepared in Step 3 by using the installation fasteners. Tighten the fastener attachment screws. The proper torque for tightening a screw to obtain a sufficient level of splash-proof is 0.5 N•m (4.4 lb-in.).



Do not over-tighten the fastener attachment screws or Display may be damaged.

- Step 5. Insert the attachment prepared in Step 4 in to the cutout section of the installation panel of the target model by matching the threaded portion of the plate with the four corners of the panel.
- Step 6. Confirm the attachment gasket is installed correctly.
- Step 7. Tighten the M4 hex nuts (6) evenly. The proper torque for tightening a nut to obtain a sufficient level of splash-proof is 0.5 N•m (4.4 lb-in.).



Do not over-tighten the hex nuts or the attachment may be damaged.

Disclaimer


We assume no responsibility for any losses, damages or any claims from third party resulting from the use of this product.

Head Office
Digital Electronics Corporation
8-2-52 Nanko-higashi
Suminoe-ku, Osaka 559-0031 JAPAN
Tel: +81-(0)6-6613-1101
Fax: +81-(0)6-6613-5888
URL: <http://www.pro-face.com/>

When the product is disposed of, it should be done so according to your country's regulations for similar types of industrial waste.

Copyright © 2013.9 Digital Electronics Corporation. All Rights Reserved.

Completed Chart

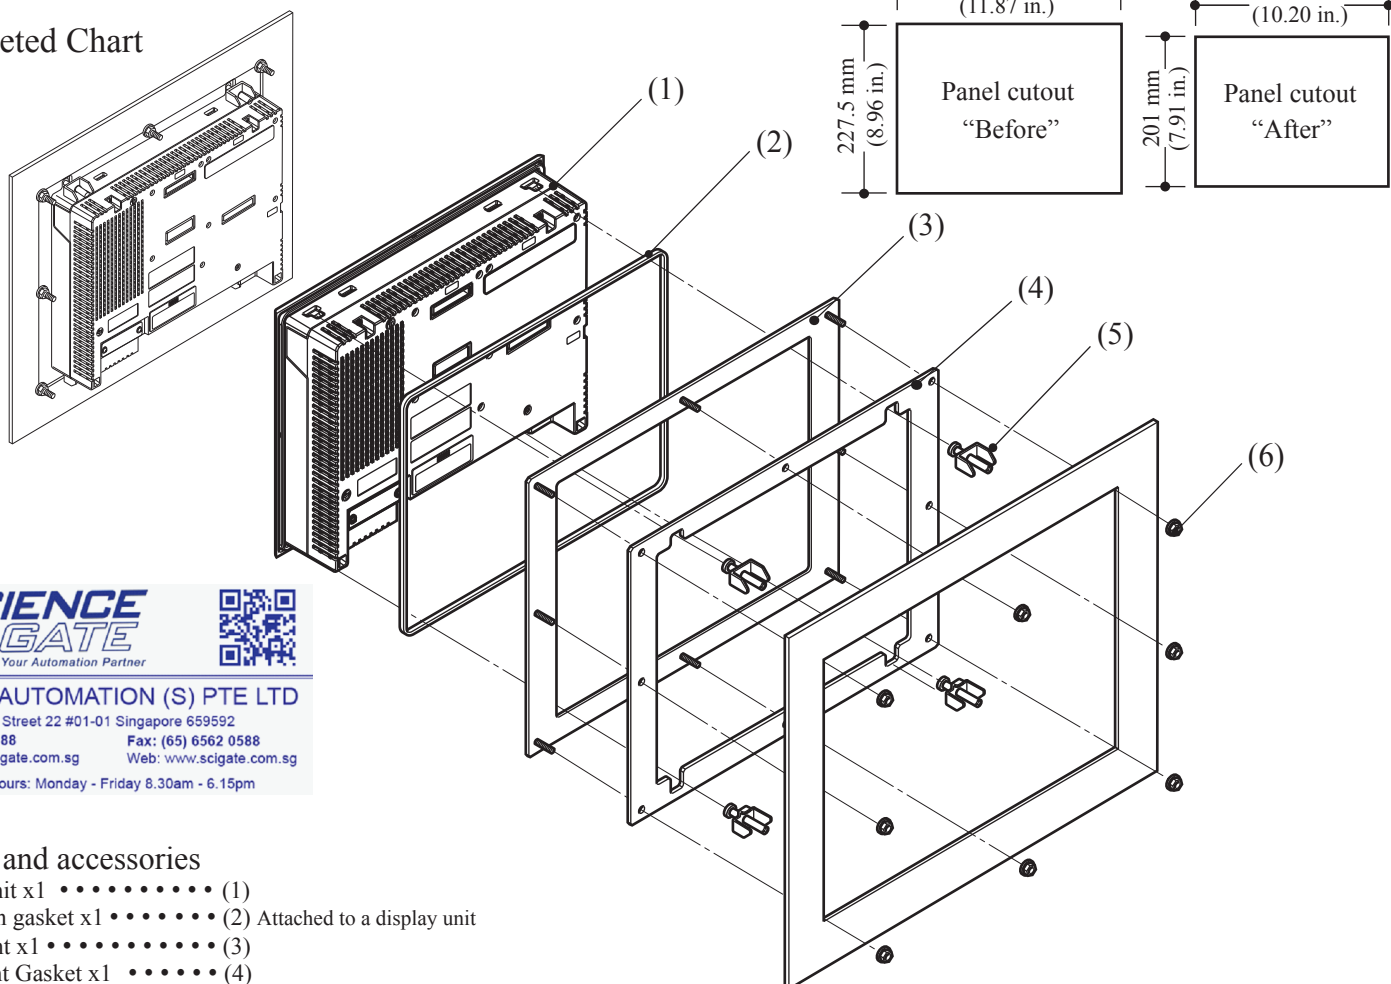

SCIENCE GATE
Your Automation Partner



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

Main unit and accessories

- Display unit x1 ••••• (1)
- Installation gasket x1 ••••• (2) Attached to a display unit
- Attachment x1 ••••• (3)
- Attachment Gasket x1 ••••• (4)
- Installation fastener x4 ••••• (5) Accessories of a display unit (*In some models, the installation fastener is already attached to the main unit.)
- M4 Hex nut x8 ••••• (6)