

Weight Transmitter UWT 6008 Devicenet

### General information

PVS28120191003

The weight transmitter UWT 6008 Devicenet has been designed by Pavone Systems. UWT 6008 Devicenet is a unique product since it is suitable to all industrial applications where it is necessary to know the load distribution on the different cells. The weight transmitter UWT 6008 Devicenet is able to monitor all load cells and generate alarms due to excessive cell signal drift, missing connections, failures in load cells and unbalanced weight distribution. The emulative control allows the weighing system to work even when a load cell is broken, until its replacement. The Software Optimation is given for free. This Software allows you to run certain activities such as calibration or monitoring directly from your computer. The Optimation software is provided by Pavone Systems and guarantees a perfect instrument run.





Software Optimation 1.3.12: optimation\_weighing\_software.zip Devicenet ESD file: uwt\_6008\_devicenet\_eds.zip Technical Manual: uwt-6008\_en.pdf



## SCIGATE AUTOMATION (S) PTE LTD

 No.1 Bukit Batok Street 22 #01-01 Singapore 659592

 Tel: (65) 6561 0488
 Fax: (65) 6562 0588

 Email: sales@scigate.com.sg
 Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

All the measures indicated are expressed in millimeters (mm

#### **PAVONE SISTEMI S.R.L.**

Via Tiberio Bianchi 11/12/13, 20863 Concorezzo (MB), Milan, Italy T (+39) 039 9162656 F (+39) 039 9162675 W en.pavonesistemi.it Industrial Electronic Weighing Systems since 1963





# **Technical specifications**

Measuring range:	-3.9 ÷ +3.9 mV/V
Input sensitivity:	0.02 µV/count
Full scale non-Linearity:	<0.01%
Gain drift:	< 0.001% FS/°C
Display:	128 x 64-pixel graphic LCD
A/D Converter:	24 bits
Internal Resolution:	> 16.000.000 points
Trasducer input voltage:	5 Vcc (230 mA max.)
Frequency signal acquisition:	12,5 ÷ 300 Hz
Visible resolution (in divisions):	999999
Divisions value (adjustable):	x1, x2, x5, x10, x20, x50
Decimal figures range:	0 ÷ 4
Temperature range:	-10 ÷ + 50°C (humidity max 85% no condensation)
Storage temperature:	-20 ÷ +70°C
Filter:	5 ÷ 250 Hz
Filter: Logic output:	5 ÷ 250 Hz 2 relays, Max. 48 Vac/Vdc, 2A each
Logic output:	2 relays, Max. 48 Vac/Vdc, 2A each
Logic output: Logic input:	2 relays, Max. 48 Vac/Vdc, 2A each 2 opto-isolated at 12/24 Vdc PNP (external power supply)
Logic output: Logic input: Serial port:	2 relays, Max. 48 Vac/Vdc, 2A each 2 opto-isolated at 12/24 Vdc PNP (external power supply) 1 USB device + 1 RS232C + 1 RS485
Logic output: Logic input: Serial port: Analog output Non-Linearity:	2 relays, Max. 48 Vac/Vdc, 2A each 2 opto-isolated at 12/24 Vdc PNP (external power supply) 1 USB device + 1 RS232C + 1 RS485 < 0,02%
Logic output:         Logic input:         Serial port:         Analog output Non-Linearity:         Temperature drift analog output:	2 relays, Max. 48 Vac/Vdc, 2A each 2 opto-isolated at 12/24 Vdc PNP (external power supply) 1 USB device + 1 RS232C + 1 RS485 < 0,02% 0,001% FS / °C
Logic output:Logic input:Serial port:Analog output Non-Linearity:Temperature drift analog output:Power supply:	2 relays, Max. 48 Vac/Vdc, 2A each 2 opto-isolated at 12/24 Vdc PNP (external power supply) 1 USB device + 1 RS232C + 1 RS485 < 0,02% 0,001% FS / °C 12-24 Vdc ±15% - Power consumption 4 W
Logic output:Logic input:Serial port:Analog output Non-Linearity:Temperature drift analog output:Power supply:Microcontroller:	<ul> <li>2 relays, Max. 48 Vac/Vdc, 2A each</li> <li>2 opto-isolated at 12/24 Vdc PNP (external power supply)</li> <li>1 USB device + 1 RS232C + 1 RS485</li> <li>&lt; 0,02%</li> <li>0,001% FS / °C</li> <li>12-24 Vdc ±15% - Power consumption 4 W</li> <li>ARM Cortex M0+ at 32 bits, 256KB Flash reprogrammable on-board from USB</li> </ul>
Logic output:Logic input:Serial port:Analog output Non-Linearity:Temperature drift analog output:Power supply:Microcontroller:Data storage:	<ul> <li>2 relays, Max. 48 Vac/Vdc, 2A each</li> <li>2 opto-isolated at 12/24 Vdc PNP (external power supply)</li> <li>1 USB device + 1 RS232C + 1 RS485</li> <li>&lt; 0,02%</li> <li>0,001% FS / °C</li> <li>12-24 Vdc ±15% - Power consumption 4 W</li> <li>ARM Cortex M0+ at 32 bits, 256KB Flash reprogrammable on-board from USB</li> <li>64 Kbytes expandable up to 1024 Kbytes</li> </ul>



## Weight Transmitter UWT 6008 Devicenet

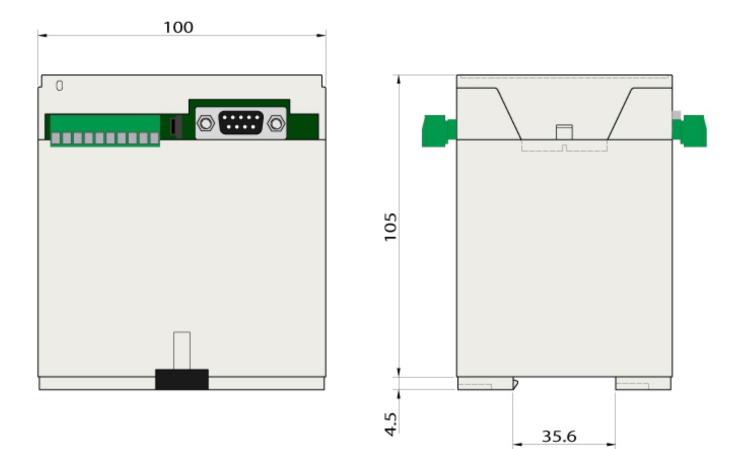

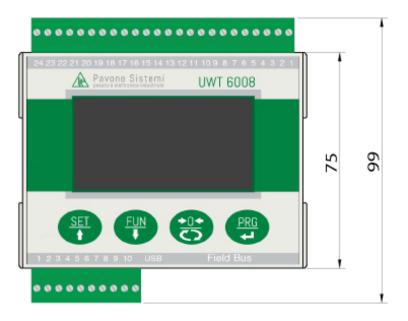

### PAVONE SISTEMI S.R.L.

Via Tiberio Bianchi 11/12/13, 20863 Concorezzo (MB), Milan, Italy T (+39) 039 9162656 F (+39) 039 9162675 W en.pavonesistemi.it Industrial Electronic Weighing Systems since 1963