

kWh

## Dyneo® Motors & Drives

**Unidrive M variable speed drives**

**LSRPM permanent magnet synchronous motors**

13 hp (9.8 kW) to 321 hp (240 kW)

460 V





## High-performance Solutions

---

Emerson Industrial Automation presents the Dyneo® range, a high-performance solution consisting of permanent magnet synchronous motors and variable speed drives. Combined with Unidrive M600 and M700 drives, LSRPM motors offer solutions suited to the industrial environment, producing optimum electrical and mechanical performance, that are ideal for saving energy and substantially cutting operating costs:

- Extended speed range
- High torque
- Super premium efficiency
- Unrivalled power density
- Motor control with or without encoder feedback

The Unidrive M - LSRPM combinations described in this catalog are suitable for most applications.

Add-ons or options for drives and motors can be included to satisfy particular demands.

### Sensorless control

Fifteen years' experience of controlling permanent magnet motors and ongoing collaboration between our motors and drives development teams have allowed us to test different algorithms for total sensorless control of the majority of Process applications.

The aim is to offer the user the benefit of the excellent performance of permanent magnet motors with the simplicity of induction motors.

For information about the detailed operating conditions of this control mode, see the "Control modes" section.

### Single manufacturer warranty

A motor-drive system produced by a single manufacturer ensures optimum performance obtained by using components designed to work together, with a global warranty from a single company.

Further information about the products described in this catalog is available in the corresponding technical documentation.



## Overview

### Unidrive M AC/Servo Drives



**Unidrive M Product Range 0.33 hp (0.25 kW) to 4,200 hp (2.8 MW)**

#### Customized range of drives to meet the needs of industrial sectors


The Unidrive M range has been specifically designed for industrial applications and offers excellent levels of functionality, flexibility and performance.

The Unidrive M motor control algorithm has been optimized with Dyneo® motors in order to obtain maximum performance.

Unidrive M drives are designed for easy integration in industrial enclosures.




More information  
about Unidrive M





## Overview

### Dyneo® Permanent Magnet Motors

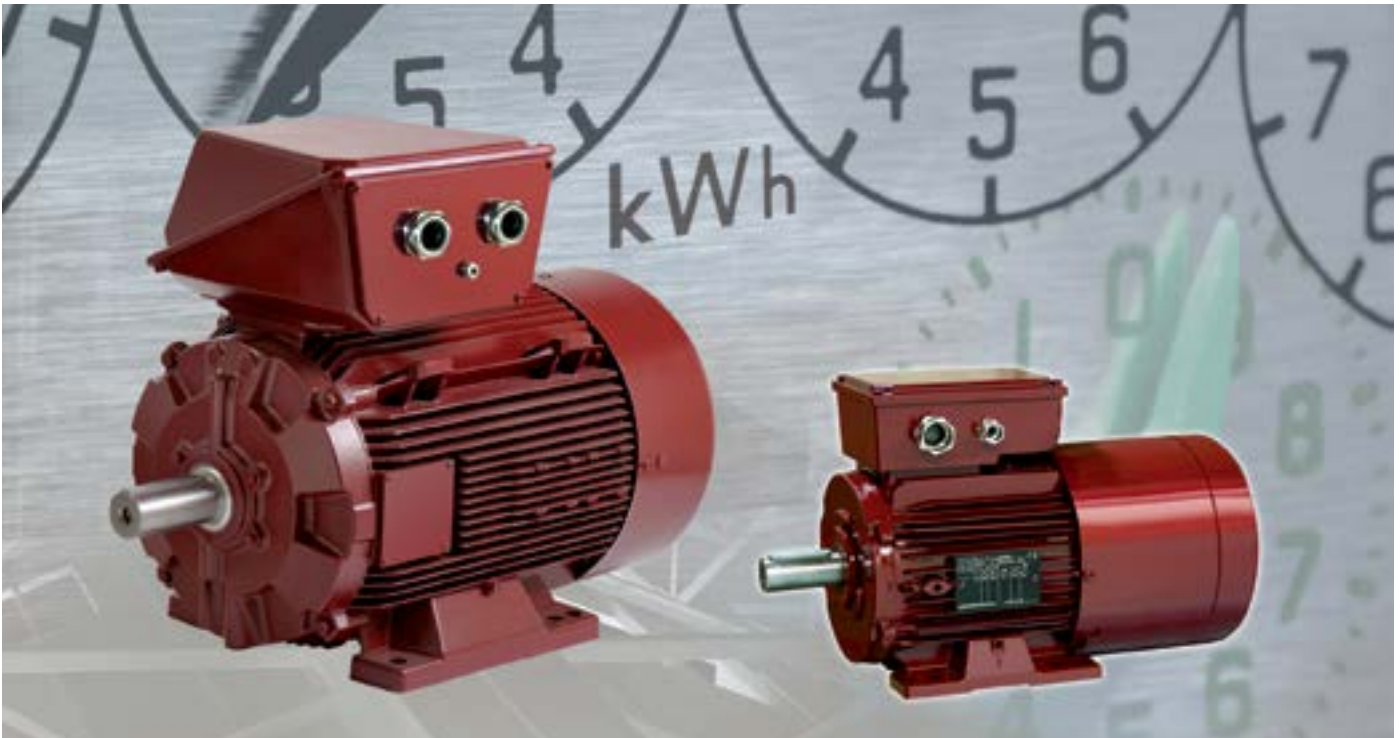

Dyneo® Product Range 1.0 hp (0.75 kW) to 670 hp (500 kW)

#### Innovation you can place your trust in

Alliance of magnet rotor technology and the induction motor's tried and tested mechanical arrangement

#### Exceptional savings

##### On the purchase price

- Simplification through elimination of transmission devices (pulleys, belts, etc.): extended speed range
- Longer service life
- Reduction in the weight and dimensions of the driven machine: up to 3 frame sizes smaller

##### On energy bills


- High efficiency over the entire speed range

##### On maintenance

- Less stress on the machine

#### Performance

- Guaranteed torque over the entire speed range
- Optimized power with centrifugal torque operation

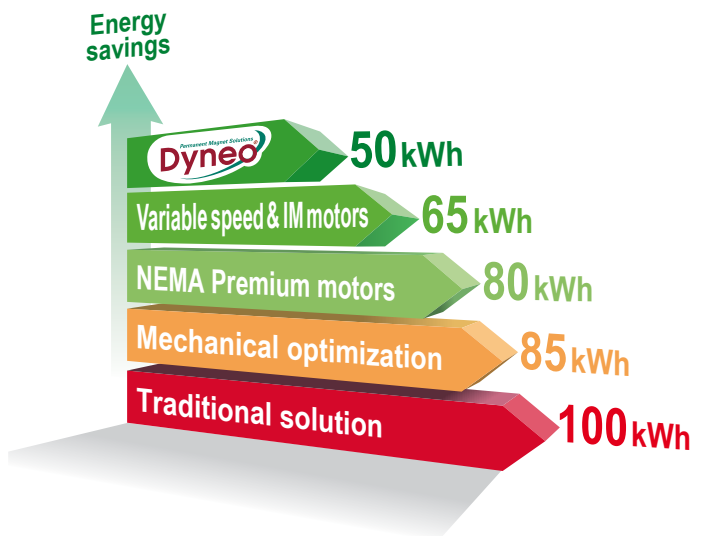

kWh: electricity consumption

# Unidrive M, Fast and Easy Integration Flexibility

## Programming and parameter-setting options

Unidrive M Connect



KI-Keypad



KI-Keypad RTC



Remote Keypad



Remote Keypad RTC



Human-Machine Interface



Smartcard



SD card with SD card adapter



KI-485-Adaptor



## Speed feedback

SI-Encoder



SI-Universal Encoder



- Standard on Unidrive M700:
  - 2 universal encoder input channels
  - EnDat 2.2, HIPERFACE and SSI taken into account
  - 1 simulated encoder output



## Control modes



LSRPM



LSRPM with encoder

- Control of induction motors in open loop flux vector or V/Hz mode
- RFC (Rotor Flux Control) of induction motors in open loop mode (RFC-A)
- RFC (Rotor Flux Control) of induction motors in closed loop mode (RFC-A) (with SI-Encoder option for Unidrive M600)
- Control of permanent magnet motors in open loop mode (RFC-S)
- Control of permanent magnet motors in closed loop mode (RFC-S) (Unidrive M700)

Power converter  
AFE (Active Front End)



## Applications with PLC functionality and motion control

Ease of use of both the onboard PLC and the Advanced Motion Controller for Unidrive M700, within the IEC61131 programming environment



SI-Applications Plus for programs developed on SYPTPro

Option for the Unidrive M700



MCi 200 Advanced machine control

Option for the Unidrive M700



MCi 210 Advanced machine control with additional Ethernet connectivity

Option for the Unidrive M700



## I/O




Standard on Unidrive M700 and M701

- 5 x analog I/O\*
- 8 x digital I/O
- 1 x STO (2 X STO for M702)

\* Unidrive M702 does not have analog I/O as standard

Remote I/O



SI-I/O



## PLC/Centralized motion controller for Unidrive M700

Motion controller



PLC



Industrial PC



## Safety

SI-Safety



## Communications

- Unidrive M600 and M701:
  - RS485 (Modbus RTU)
- Unidrive M700 and M702:
  - Ethernet (IEEE 1588 V2)
  - EtherNet/IP
  - Modbus TCP/IP
  - TCP/IP
  - UDP



SI-Ethernet



SI-DeviceNet



SI-PROFINET-V2



SI-EtherCAT



SI-CANopen



SI-PROFIBUS



See the individual Unidrive M product brochures and technical documentation for model details including selection and options.

## Introduction

### Unidrive M drives

---

Unidrive M is a range of variable speed drives designed for controlling induction, servo and synchronous motors.

This feature gives the Unidrive M a vast field of applications, and it has a level of performance and functionality to cope with the most demanding systems.

The **Unidrive M600** model is dedicated to Sensorless control of LSRPM motors for applications matching the conditions described in the “Control modes” section.

The **Unidrive M700, M701 and M702** models also feature Sensorless control and can be used to control LSRPM motors in closed loop mode with higher performance, and guarantees maximum machine productivity thanks to its advanced functions.

For quick and easy commissioning of a Unidrive M600 or M700/LSRPM motor-drive unit, use the Unidrive M Connect parameter-setting software. Follow the instructions in the “Quick initial commissioning” section described in the commissioning manual for the relevant drive.





# Introduction

## LSRPM motors

### Motor Specifications

| Description                        | Materials  | Comments  |
|------------------------------------|--|---|
| <b>Housing</b>                     | LSRPM: Aluminum alloy  | <ul style="list-style-type: none"><li>- With integral or screw-on feet, or without feet</li><li>- 4 or 6 fixing holes for housings with feet</li><li>- Lifting rings</li><li>- Ground terminal with an optional jumper screw</li></ul>  |
| <b>Stator</b>                      | Insulated low-carbon magnetic steel laminations<br><br>Electroplated copper          | <ul style="list-style-type: none"><li>- Low carbon content guarantees long-term lamination pack stability</li><li>- Welded laminations</li><li>- Optimized magnetic circuit</li><li>- Insulation or coating system making it possible to withstand the sudden voltage variations caused by the high switching frequencies of IGBT transistor drives</li><li>- Class F insulation</li><li>- Thermal protection provided by PTC probes (1 per phase, 2-wire output)</li></ul> |
| <b>Rotor</b>                       | Insulated low-carbon magnetic steel laminations<br>Aluminum alloy<br>Nd-Fe-B magnets | <ul style="list-style-type: none"><li>- Magnet fixing system, patented by Leroy-Somer</li><li>- Rotor balanced dynamically with a half-key (H)</li></ul>  |
| <b>Shaft</b>                       | Steel  |   |
| <b>End shields</b>                 | Cast iron  |   |
| <b>Bearings and lubrication</b>    |  | <ul style="list-style-type: none"><li>- Ball bearings, C3 play</li><li>- Preloaded NDE bearings</li><li>- Greased for life up to frame size 200, regreasable in larger sizes</li><li>- Insulated NDE bearings on some motors</li><li>- Aegis grounding ring on some motors</li></ul>  |
| <b>Labyrinth seal<br/>Lipseals</b> | Plastic or steel<br>Synthetic rubber   | <ul style="list-style-type: none"><li>- Lipseal or deflector at drive end for all flange mounted motors</li><li>- Lipseal, deflector or labyrinth seal for foot mounted motors</li></ul>  |
| <b>Fan</b>                         | Composite material<br>or aluminum alloy or steel                                     | <ul style="list-style-type: none"><li>- Bi-directional</li></ul>  |
| <b>Fan cover</b>                   | Pressed steel  | <ul style="list-style-type: none"><li>- Fitted, on request, with a drip cover for operation in vertical position, shaft end facing down</li></ul>   |
| <b>Terminal box</b>                | Aluminum alloy   | <ul style="list-style-type: none"><li>- Fitted with a terminal block with 3 or 6 steel terminals as standard (brass as an option)</li><li>- Pre-drilled terminal box without cable glands or with undrilled mounting plate (optional cable gland)</li><li>- Ground terminal in each terminal box</li></ul>  |
| <b>Brake motor</b>                 |  | FCR: synchronous motor and failsafe brake, from 0.33 hp (0.25 kW) to 15 hp (11 kW)<br>FCPL: synchronous motor and failsafe brake, from 20 hp (15 kW) to 175 hp (132 kW)   |



The motor rotor contains a powerful magnetic field. When the rotor is separated from the motor, its field can affect pacemakers or disturb digital devices such as watches, cell phones, etc.

Assembly or maintenance of the rotor must not be carried out by people with a pacemaker or any other implanted medical electronic device.


**The assembled motor presents no risk.**



# Introduction

## Drives

### DRIVE ORDER CODE

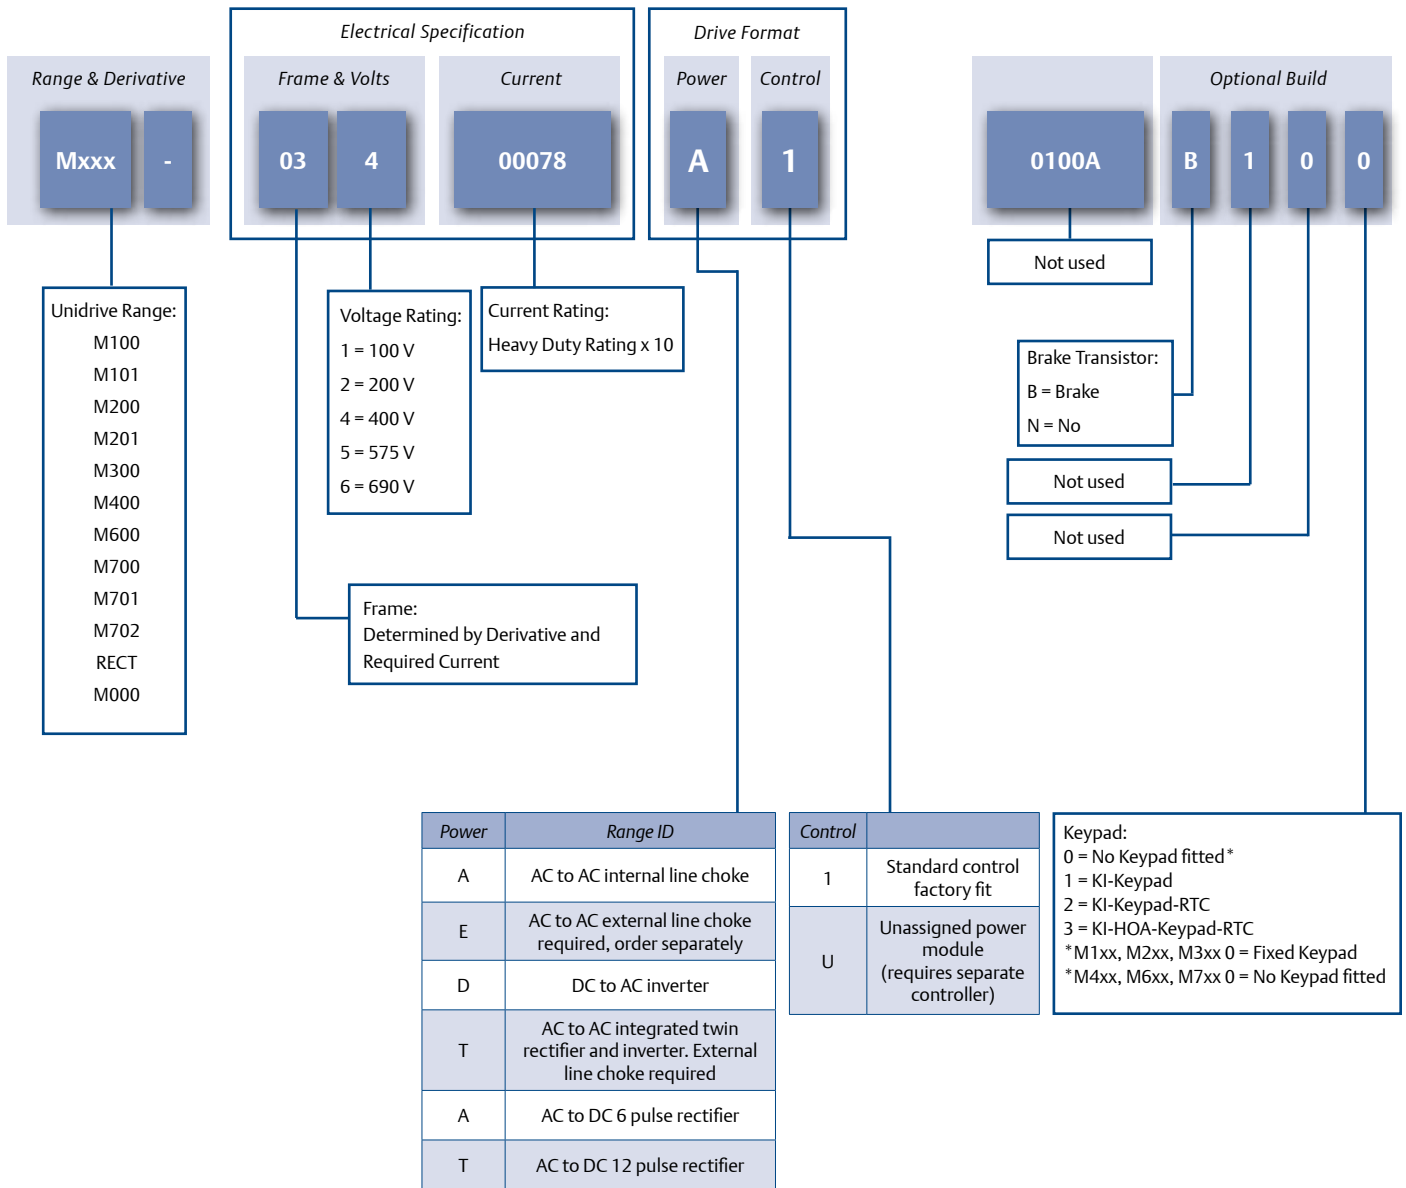


## Introduction

## Motors

---

### MOTOR DESCRIPTION

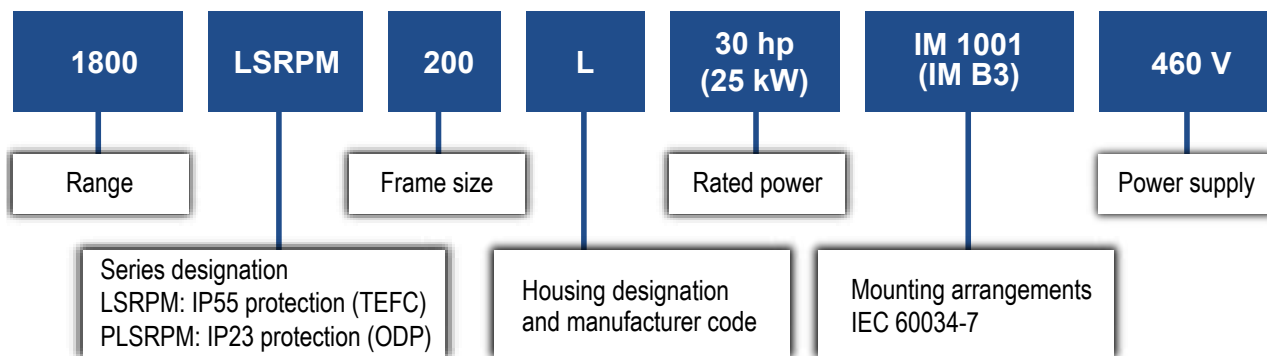

## Introduction


### Control modes

The LSRPM motor combined with the Unidrive M has different characteristics depending on the selected control mode. This should be determined based on:

- the starting torque
- the inertia of the driven machine
- the machine's rated speed (or regulation range)

The diagram below can be used to determine the most suitable control mode for the application. RFC-S Sensorless mode is particularly suitable for applications with low starting torque and an inertia ratio less than 30. The optimum drive model for this operating mode is the Unidrive M600.

In RFC-S mode with encoder feedback (closed loop), the Unidrive M700 offers ideally suited levels of functionality. To select the encoder, see the "Selection of encoder" section in the "Installation and options" chapter.

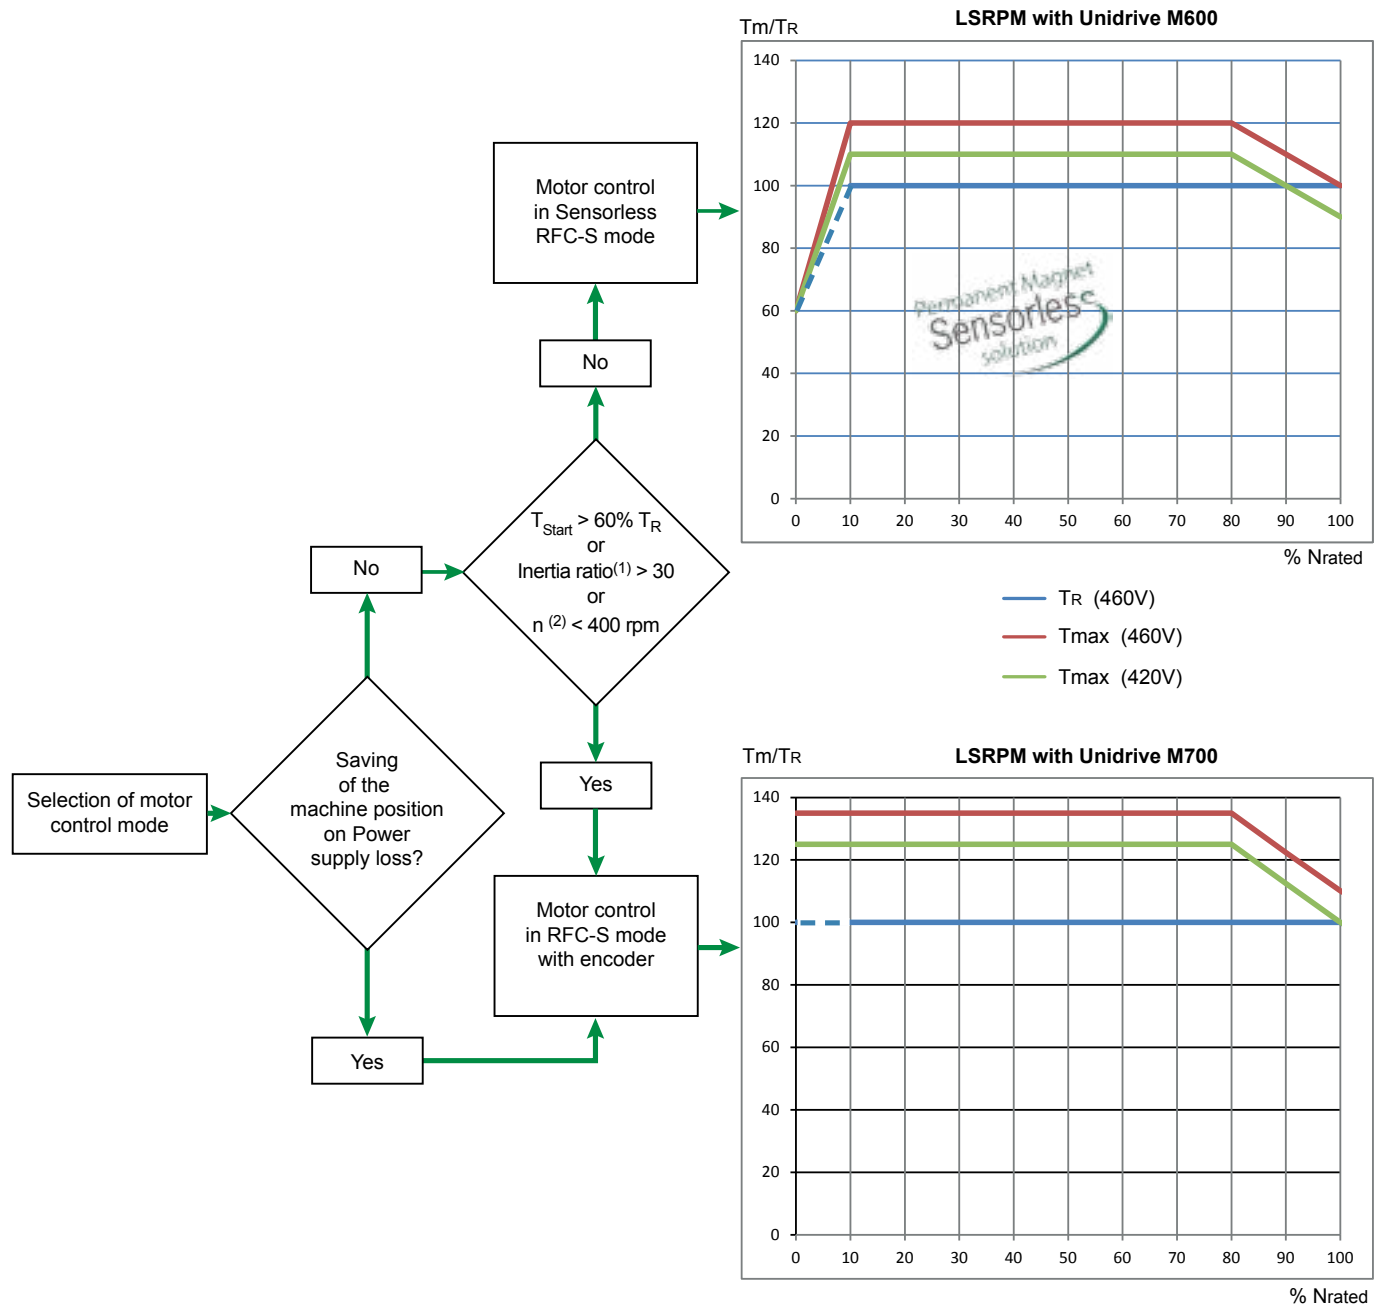

(1) Ratio between the driven load inertia related to the motor speed and the motor inertia

(2) Minimum speed

## Introduction

## Selection method

### Example 1:

A centrifugal pump requires torque of 129 lb-ft at 1,800 rpm in continuous duty (regulation from 600 to 1,800 rpm). The maximum torque is < 115% of  $T_R$ , and the starting torque is negligible.

#### Step 1: Selection of the control mode

Depending on the criteria, RFC-S Sensorless control may be suitable. This can be checked using the table of compatibility between drives and motors.

### Example 2:

A machine requires a torque of 129 lb-ft from 1,080 to 1,700 rpm in continuous duty. The maximum torque is 130% of  $T_n$ , and the starting torque is 70% of  $T_R$ .

#### Step 1: Selection of the control mode

Depending on the criteria, RFC-S control with encoder feedback may be suitable. This can be checked using the table of compatibility between drives and motors.

### Step 2: Selection of the motor-drive unit

Select the motor-drive unit according to the rated and maximum torque required by the application (Selection section).

| MOTOR |             |                        | DRIVE    | MOTOR & DRIVE COMBINATION |              |                 |                |                               |                              |                                |                                     |                     |                          | MOTOR             |          |
|-------|-------------|------------------------|----------|---------------------------|--------------|-----------------|----------------|-------------------------------|------------------------------|--------------------------------|-------------------------------------|---------------------|--------------------------|-------------------|----------|
| Type  | Rated power | Efficiency IEC 6003421 | Unidrive | Available power           | Rated torque | Starting torque | Maximum torque | Maximum torque / Rated torque | Maximum Torque @ rated speed | Full load current Drive(Motor) | Maximum current / Full load current | Switching frequency | Motor & drive efficiency | Moment of inertia | Weight   |
|       | Pr          | η                      |          | Pn                        | Tr           | Ts              | Tmax           | Tmax/Tr                       |                              | FLC                            | Imax / FLC                          | Fs                  | η                        | J                 | IM B3    |
|       | (hp)        | (%)                    |          | M700-                     | (hp)         | (lb-ft)         | (lb-ft)        | (lb-ft) (1)                   |                              | (lb-ft) (2)                    | (Amps) (3)                          |                     | (kHz) (4)                | (%)               | (lb-ft²) |
|       |             |                        |          |                           |              |                 |                |                               |                              |                                |                                     |                     |                          |                   |          |

#### 1800 range - without encoder (Sensorless)

|              |      |      |           |      |       |      |       |      |       |    |      |     |      |       |       |
|--------------|------|------|-----------|------|-------|------|-------|------|-------|----|------|-----|------|-------|-------|
| LSRPM 160 LR | 36.6 | 94.0 | 06400420A | 36.6 | 106.8 | 64.1 | 122.4 | 1.15 | 106.8 | 45 | 1.17 | 3.0 | 92.1 | 1.486 | 174.2 |
| LSRPM 200 L  | 44.3 | 94.0 | 07400660A | 44.3 | 129.1 | 77.5 | 151.0 | 1.17 | 129.1 | 72 | 1.21 | 3.0 | 92.1 | 3.085 | 297.6 |
| LSRPM 200 L  | 53.6 | 94.8 | 07400660A | 53.6 | 156.5 | 93.9 | 174.9 | 1.12 | 156.5 | 77 | 1.13 | 3.0 | 92.9 | 4.034 | 330.7 |

#### 1800 range - with encoder

|              |      |      |           |      |       |       |       |      |       |    |      |     |      |       |       |
|--------------|------|------|-----------|------|-------|-------|-------|------|-------|----|------|-----|------|-------|-------|
| LSRPM 160 LR | 36.6 | 94.0 | 06400470A | 36.6 | 106.8 | 146.2 | 146.2 | 1.37 | 125.3 | 45 | 1.45 | 3.0 | 92.1 | 1.486 | 174.2 |
| LSRPM 200 L  | 44.3 | 94.0 | 07400660A | 44.3 | 129.1 | 155.9 | 155.9 | 1.21 | 140.4 | 69 | 1.26 | 3.0 | 92.1 | 3.085 | 297.6 |
| LSRPM 200 L  | 44.3 | 94.0 | 07400770A | 44.3 | 129.1 | 176.9 | 176.9 | 1.37 | 151.6 | 69 | 1.45 | 3.0 | 92.1 | 3.085 | 297.6 |

### Example 1:

Selected motor-drive unit:  
1800 LSRPM 200 L 44 hp  
and Unidrive M600/074-00660A

### Example 2:


Selected motor-drive unit:  
1800 LSRPM 200 L 44 hp  
and Unidrive M700/074-00770A

### Step 3: Check the selection

Using the motor thermal curve, check that the motor is suitable for the torque range required by the application.

#### Example 1:

Torque from 107 to 333 lb-ft

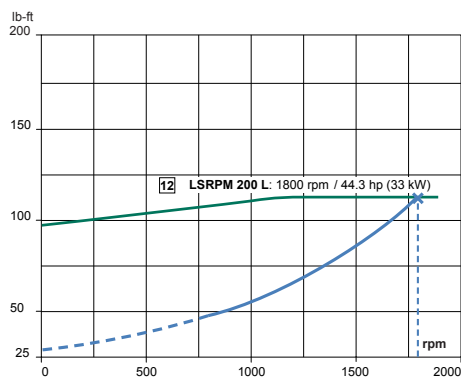


1800 range

Legend  
— MOTOR  
--- LOAD

#### Example 2:

Torque from 107 to 333 lb-ft

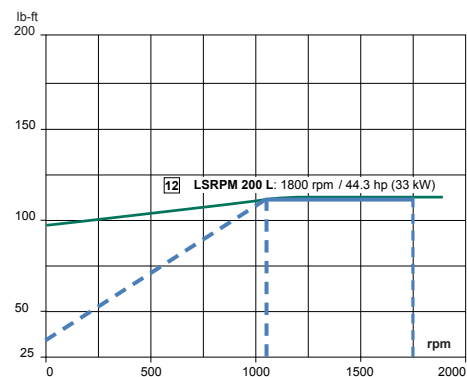




## Introduction

### Efficiency

The efficiency of Leroy-Somer permanent magnet synchronous motors is higher than those of induction motors and more consistent over the operating speed range (see graph below).

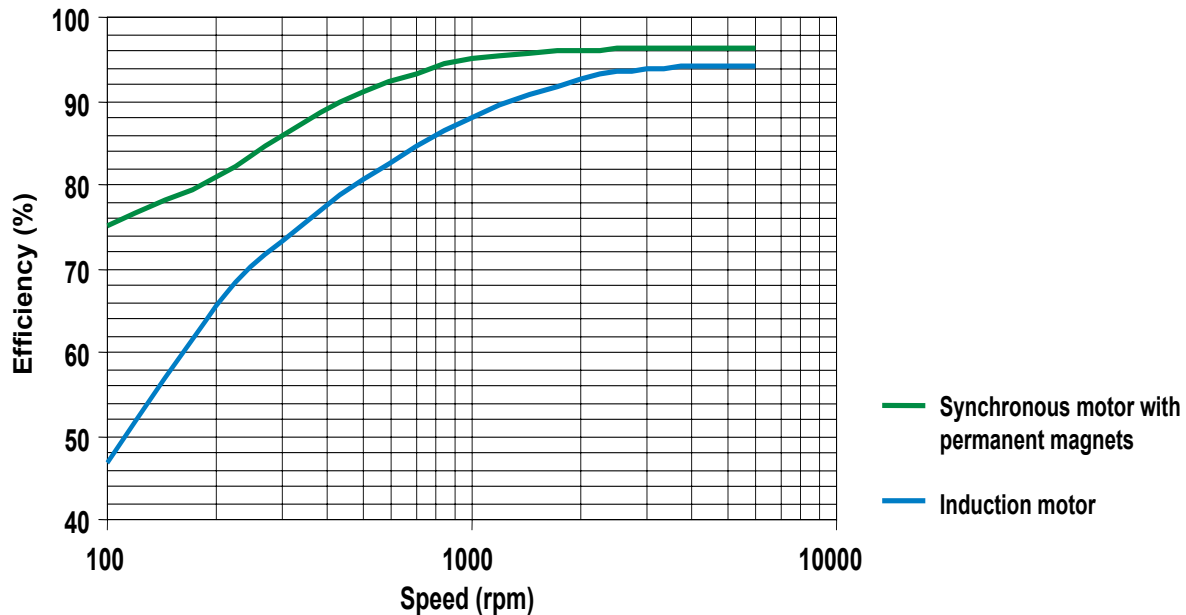

#### Efficiency of permanent magnet synchronous motors

Apart from a few exceptions, synchronous motors cannot operate correctly on a traditional sinusoidal AC supply. They are practically always supplied via a drive. This catalog provides the efficiencies of Motor & Drive combinations, controlled by Emerson Industrial Automation drives.

#### Efficiency of induction motors supplied via drives

As a general rule, the efficiencies of induction motors listed in catalogs are values measured on a sinusoidal AC supply at rated speed.

The voltage and current waveforms created by the drive are not sinusoidal. Supplying power via a drive therefore results in additional losses in the motor. These are estimated at 20% of the total losses, according to specifications 60034-17. These losses have a direct impact on the "actual" efficiency of the motor.

In variable speed mode, this efficiency should therefore be corrected in accordance with the formula below.

$$\eta_2 = \eta_1 / (1.2 - 0.2 \eta_1)$$

$\eta_2$  = efficiency of induction motor controlled by a drive

$\eta_1$  = efficiency of induction motor supplied from the AC supply

**Example of induction/synchronous efficiency:** 270 hp application at 3600 rpm

$\eta_1$ : Efficiency of the 270 hp, 2-pole induction motor on 60 Hz AC supply = 96%

$\eta_2$ : Estimated efficiency of the same induction motor supplied via a drive at 60 Hz

$\eta_2 = 0.96 / (1.2 - 0.2 \times 0.96) = 0.9524$  i.e. 95.24%

**Efficiency of the equivalent synchronous motor = 97.3%**

## Notes

---

## Performance

### 1800 range - without encoder (Sensorless)

**Class F - DT80K - S1 Self-Cooled - Altitude 1000 m max - Ambient temperature 40°C max**

460 V drive input voltage

|  |             |
|--|-------------|
|  | Drive limit |
|  | Motor limit |

| MOTOR         |             |                        | DRIVE     | MOTOR & DRIVE COMBINATION |              |                 |                |                               |                              |                                |                                     |                     |                          | MOTOR             |        |
|---------------|-------------|------------------------|-----------|---------------------------|--------------|-----------------|----------------|-------------------------------|------------------------------|--------------------------------|-------------------------------------|---------------------|--------------------------|-------------------|--------|
| Type          | Rated power | Efficiency IEC 6003421 | Unidrive  | Available power           | Rated torque | Starting torque | Maximum torque | Maximum torque / Rated torque | Maximum Torque @ rated speed | Full load current Drive(Motor) | Maximum current / Full load current | Switching frequency | Motor & drive efficiency | Moment of inertia | Weight |
|               | Pr          | η                      |           | Pn                        | Tr           | Ts              | Tmax           | Tmax/Tr                       |                              | FLC                            | I <sub>max</sub> / FLC              | F <sub>s</sub>      | η                        | J                 | IM B3  |
|               | (hp)        | (%)                    | M600-     | (hp)                      | (lb-ft)      | (lb-ft)         | (lb-ft) (1)    |                               | (lb-ft) (2)                  | (Amps) (3)                     |                                     | (kHz) (4)           | (%)                      | (lb-ft²)          | (lb)   |
| LSRPM 132 M   | 13.1        | 92.0                   | 04400150A | 13.1                      | 38.4         | 23.0            | 42.8           | 1.12                          | 38.4                         | 18                             | 1.13                                | 3.0                 | 90.2                     | 0.392             | 88.2   |
| LSRPM 132 M   | 13.1        | 92.0                   | 04400172A | 13.1                      | 38.4         | 23.0            | 46.0           | 1.20                          | 38.4                         | 18                             | 1.25                                | 3.0                 | 90.2                     | 0.392             | 88.2   |
| LSRPM 132 M   | 16.5        | 92.5                   | 04400172A | 16.5                      | 48.2         | 28.9            | 56.1           | 1.16                          | 48.2                         | 22                             | 1.20                                | 3.0                 | 90.6                     | 0.548             | 97.0   |
| LSRPM 132 M   | 19.3        | 93.0                   | 04400172A | 18.5                      | 54.1         | 32.5            | 59.4           | 1.10                          | 54.1                         | 24 (25)                        | 1.10                                | 3.0                 | 91.1                     | 0.738             | 108.0  |
| LSRPM 132 M   | 19.3        | 93.0                   | 05400270A | 19.3                      | 56.3         | 33.8            | 67.6           | 1.20                          | 56.3                         | 25                             | 1.25                                | 3.0                 | 91.1                     | 0.738             | 108.0  |
| LSRPM 160 MP  | 25.1        | 93.5                   | 05400270A | 23.5                      | 68.6         | 41.2            | 75.4           | 1.10                          | 68.6                         | 30 (32)                        | 1.10                                | 3.0                 | 91.6                     | 0.992             | 132.3  |
| LSRPM 160 MP  | 25.1        | 93.5                   | 05400300A | 24.3                      | 70.9         | 42.6            | 78.0           | 1.10                          | 70.9                         | 31 (32)                        | 1.10                                | 3.0                 | 91.6                     | 0.992             | 132.3  |
| LSRPM 160 MP  | 25.1        | 93.5                   | 06400350A | 25.1                      | 73.2         | 43.9            | 87.8           | 1.20                          | 73.2                         | 32                             | 1.25                                | 3.0                 | 91.6                     | 0.992             | 132.3  |
| LSRPM 160 MP  | 30.8        | 94.0                   | 06400350A | 30.8                      | 90.0         | 54.0            | 99.0           | 1.10                          | 90.0                         | 38                             | 1.10                                | 3.0                 | 92.1                     | 1.220             | 152.1  |
| LSRPM 160 MP  | 30.8        | 94.0                   | 06400420A | 30.8                      | 90.0         | 54.0            | 108.0          | 1.20                          | 90.0                         | 38                             | 1.25                                | 3.0                 | 92.1                     | 1.220             | 152.1  |
| LSRPM 160 LR  | 36.6        | 94.0                   | 06400420A | 36.6                      | 106.8        | 64.1            | 122.4          | 1.15                          | 106.8                        | 45                             | 1.17                                | 3.0                 | 92.1                     | 1.486             | 174.2  |
| LSRPM 200 L   | 44.3        | 94.0                   | 07400660A | 44.3                      | 129.1        | 77.5            | 151.0          | 1.17                          | 129.1                        | 72                             | 1.21                                | 3.0                 | 92.1                     | 3.085             | 297.6  |
| LSRPM 200 L   | 53.6        | 94.8                   | 07400660A | 53.6                      | 156.5        | 93.9            | 174.9          | 1.12                          | 156.5                        | 77                             | 1.13                                | 3.0                 | 92.9                     | 4.034             | 330.7  |
| LSRPM 200 L   | 53.6        | 94.8                   | 07400770A | 53.6                      | 156.5        | 93.9            | 187.7          | 1.20                          | 156.5                        | 77                             | 1.25                                | 3.0                 | 92.9                     | 4.034             | 330.7  |
| LSRPM 200 L   | 73.8        | 95.7                   | 07400770A | 68.7                      | 200.3        | 120.2           | 220.4          | 1.10                          | 200.3                        | 94 (101)                       | 1.10                                | 3.0                 | 93.8                     | 4.746             | 363.8  |
| LSRPM 200 L   | 73.8        | 95.7                   | 07401000A | 73.8                      | 215.2        | 129.1           | 253.5          | 1.18                          | 215.2                        | 101                            | 1.22                                | 3.0                 | 93.8                     | 4.746             | 363.8  |
| LSRPM 225 ST1 | 93.9        | 96.1                   | 08401340A | 93.9                      | 273.9        | 164.3           | 328.6          | 1.20                          | 273.9                        | 125                            | 1.25                                | 3.0                 | 94.2                     | 6.170             | 425.5  |
| LSRPM 225 MR1 | 114.0       | 96.0                   | 08401340A | 112.5                     | 328.3        | 197.0           | 361.2          | 1.10                          | 328.3                        | 155 (157)                      | 1.10                                | 3.0                 | 94.1                     | 7.594             | 491.6  |
| LSRPM 225 MR1 | 114.0       | 96.0                   | 08401570A | 114.0                     | 332.5        | 199.5           | 399.0          | 1.20                          | 332.5                        | 157                            | 1.25                                | 3.0                 | 94.1                     | 7.594             | 491.6  |
| LSRPM 250 ME  | 134.1       | 96.1                   | 08401570A | 134.1                     | 391.2        | 234.7           | 442.4          | 1.13                          | 391.2                        | 176                            | 1.15                                | 3.0                 | 94.2                     | 15.425            | 628.3  |
| LSRPM 250 ME  | 134.1       | 96.1                   | 09402000A | 134.1                     | 391.2        | 234.7           | 469.5          | 1.20                          | 391.2                        | 176                            | 1.25                                | 3.0                 | 94.2                     | 15.425            | 628.3  |
| LSRPM 280 SC  | 167.6       | 96.3                   | 09402000A | 167.6                     | 489.0        | 293.5           | 545.4          | 1.12                          | 489.0                        | 216                            | 1.13                                | 3.0                 | 94.4                     | 19.934            | 727.5  |
| LSRPM 280 SC  | 167.6       | 96.3                   | 09402240A | 167.6                     | 489.0        | 293.5           | 586.8          | 1.20                          | 489.0                        | 216                            | 1.25                                | 3.0                 | 94.4                     | 19.934            | 727.5  |
| LSRPM 280 SD  | 201.2       | 96.4                   | 09402240A | 195.0                     | 569.1        | 341.5           | 642.5          | 1.13                          | 569.1                        | 255 (263)                      | 1.15                                | 3.0                 | 94.5                     | 23.730            | 837.8  |
| LSRPM 280 SD  | 201.2       | 96.4                   | 10402700E | 201.2                     | 586.9        | 352.2           | 704.4          | 1.20                          | 586.9                        | 263                            | 1.25                                | 3.0                 | 94.5                     | 23.730            | 837.8  |
| LSRPM 280 MK1 | 234.7       | 96.5                   | 10402700E | 234.7                     | 684.7        | 410.8           | 786.4          | 1.15                          | 684.7                        | 299                            | 1.18                                | 3.0                 | 94.6                     | 42.715            | 1252.2 |
| LSRPM 315 SP1 | 261.5       | 96.7                   | 10402700E | 251.3                     | 733.1        | 439.9           | 806.5          | 1.10                          | 733.1                        | 320 (333)                      | 1.10                                | 3.0                 | 94.8                     | 53.156            | 1399.9 |
| LSRPM 315 SP1 | 261.5       | 96.7                   | 10403200E | 261.5                     | 762.9        | 457.8           | 884.1          | 1.16                          | 762.9                        | 333                            | 1.19                                | 3.0                 | 94.8                     | 53.156            | 1399.9 |
| LSRPM 315 MR1 | 308.4       | 96.9                   | 10403200E | 289.3                     | 843.8        | 506.3           | 928.1          | 1.10                          | 843.8                        | 361 (385)                      | 1.10                                | 3.0                 | 95.0                     | 64.072            | 1587.3 |
| LSRPM 315 MR1 | 308.4       | 96.9                   | 11403770E | 308.4                     | 899.9        | 539.9           | 1,078.9        | 1.20                          | 899.9                        | 385                            | 1.25                                | 3.0                 | 95.0                     | 64.072            | 1587.3 |

(1) See the Maximum torque curve in the Introduction, Control mode section.

(2) The maximum torque decreases from 80% of the rated speed to the value indicated at the rated speed.

(3) Motors & Drives rated current. If the motor rated current is higher, its value is indicated in brackets. The motor rated current must be entered in the drive.

(4) Minimum switching frequency. This value must be entered in the drive. Automatic changing of the switching frequency must be disabled.

## Performance

### 1800 range - with encoder

**Class F - DT80K - S1 Self-Cooled - Altitude 1000 m max - Ambient temperature 40°C max**

460 V drive input voltage

|  |             |
|--|-------------|
|  | Drive limit |
|  | Motor limit |

| MOTOR         |             |                        | DRIVE     | MOTOR & DRIVE COMBINATION |              |                 |                |                               |                              |                                |                                     |                     |                          | MOTOR             |          |
|---------------|-------------|------------------------|-----------|---------------------------|--------------|-----------------|----------------|-------------------------------|------------------------------|--------------------------------|-------------------------------------|---------------------|--------------------------|-------------------|----------|
| Type          | Rated power | Efficiency IEC 6003421 | Unidrive  | Available power           | Rated torque | Starting torque | Maximum torque | Maximum torque / Rated torque | Maximum Torque @ rated speed | Full load current Drive(Motor) | Maximum current / Full load current | Switching frequency | Motor & drive efficiency | Moment of inertia | Weight   |
|               | Pr          | η                      |           | Pn                        | Tr           | Ts              | Tmax           | Tmax/Tr                       |                              | FLC                            | Imax / FLC                          | Fs                  | η                        | J                 | IM B3    |
|               | (hp)        | (%)                    |           | M700-                     | (hp)         | (lb-ft)         | (lb-ft)        | (lb-ft) (1)                   |                              | (lb-ft) (2)                    | (Amps) (3)                          |                     | (kHz) (4)                | (%)               | (lb-ft²) |
| LSRPM 132 M   | 13.1        | 92.0                   | 04400150A | 13.1                      | 38.4         | 44.5            | 44.5           | 1.16                          | 40.7                         | 17                             | 1.19                                | 3.0                 | 90.2                     | 0.392             | 88.2     |
| LSRPM 132 M   | 13.1        | 92.0                   | 04400172A | 13.1                      | 38.4         | 52.4            | 52.4           | 1.37                          | 45.0                         | 17                             | 1.45                                | 3.0                 | 90.2                     | 0.392             | 97.0     |
| LSRPM 132 M   | 16.5        | 92.5                   | 04400172A | 16.5                      | 48.2         | 58.0            | 58.0           | 1.21                          | 52.3                         | 21                             | 1.26                                | 3.0                 | 90.6                     | 0.548             | 97.0     |
| LSRPM 132 M   | 16.5        | 92.5                   | 05400270A | 16.5                      | 48.2         | 65.9            | 65.9           | 1.37                          | 56.5                         | 21                             | 1.45                                | 3.0                 | 90.6                     | 0.548             | 108.0    |
| LSRPM 132 M   | 19.3        | 93.0                   | 04400172A | 19.3                      | 56.3         | 62.0            | 62.0           | 1.10                          | 58.0                         | 24                             | 1.10                                | 3.0                 | 91.1                     | 0.738             | 108.0    |
| LSRPM 132 M   | 19.3        | 93.0                   | 05400270A | 19.3                      | 56.3         | 73.3            | 73.3           | 1.30                          | 64.1                         | 24                             | 1.38                                | 3.0                 | 91.1                     | 0.738             | 108.0    |
| LSRPM 160 MP  | 25.1        | 93.5                   | 05400270A | 24.3                      | 70.8         | 77.9            | 77.9           | 1.10                          | 72.9                         | 30 (31)                        | 1.10                                | 3.0                 | 91.6                     | 0.992             | 132.3    |
| LSRPM 160 MP  | 25.1        | 93.5                   | 05400300A | 25.1                      | 73.2         | 80.5            | 80.5           | 1.10                          | 75.3                         | 31                             | 1.10                                | 3.0                 | 91.6                     | 0.992             | 152.1    |
| LSRPM 160 MP  | 25.1        | 93.5                   | 06400350A | 25.1                      | 73.2         | 93.5            | 93.5           | 1.28                          | 82.3                         | 31                             | 1.35                                | 3.0                 | 91.6                     | 0.992             | 174.2    |
| LSRPM 160 MP  | 30.8        | 94.0                   | 06400350A | 30.8                      | 90.0         | 99.8            | 99.8           | 1.11                          | 93.1                         | 37.5                           | 1.11                                | 3.0                 | 92.1                     | 1.220             | 174.2    |
| LSRPM 160 MP  | 30.8        | 94.0                   | 06400420A | 30.8                      | 90.0         | 119.8           | 119.8          | 1.33                          | 103.8                        | 37.5                           | 1.41                                | 3.0                 | 92.1                     | 1.220             | 337.3    |
| LSRPM 160 LR  | 36.6        | 94.0                   | 06400420A | 36.6                      | 106.8        | 122.4           | 122.4          | 1.15                          | 112.6                        | 45                             | 1.17                                | 3.0                 | 92.1                     | 1.486             | 337.3    |
| LSRPM 160 LR  | 36.6        | 94.0                   | 06400470A | 36.6                      | 106.8        | 146.2           | 146.2          | 1.37                          | 125.3                        | 45                             | 1.45                                | 3.0                 | 92.1                     | 1.486             | 392.4    |
| LSRPM 200 L   | 44.3        | 94.0                   | 07400660A | 44.3                      | 129.1        | 155.9           | 155.9          | 1.21                          | 140.4                        | 69                             | 1.26                                | 3.0                 | 92.1                     | 3.085             | 429.9    |
| LSRPM 200 L   | 44.3        | 94.0                   | 07400770A | 44.3                      | 129.1        | 176.9           | 176.9          | 1.37                          | 151.6                        | 69                             | 1.45                                | 3.0                 | 92.1                     | 3.085             | 429.9    |
| LSRPM 200 L   | 53.6        | 94.8                   | 07400660A | 53.6                      | 156.5        | 177.8           | 177.8          | 1.14                          | 164.2                        | 75                             | 1.16                                | 3.0                 | 92.9                     | 4.034             | 551.2    |
| LSRPM 200 L   | 53.6        | 94.8                   | 07400770A | 53.6                      | 156.5        | 204.2           | 204.2          | 1.30                          | 178.3                        | 75                             | 1.38                                | 3.0                 | 92.9                     | 4.034             | 551.2    |
| LSRPM 200 L   | 73.8        | 95.7                   | 07400770A | 71.5                      | 208.6        | 229.4           | 229.4          | 1.10                          | 214.7                        | 94 (97)                        | 1.10                                | 3.0                 | 93.8                     | 4.746             | 590.8    |
| LSRPM 200 L   | 73.8        | 95.7                   | 07401000A | 73.8                      | 215.2        | 261.5           | 261.5          | 1.22                          | 234.9                        | 97                             | 1.27                                | 3.0                 | 93.8                     | 4.746             | 634.9    |
| LSRPM 225 ST1 | 93.9        | 96.1                   | 07401000A | 88.4                      | 257.8        | 283.6           | 283.6          | 1.10                          | 265.4                        | 112 (119)                      | 1.10                                | 3.0                 | 94.2                     | 6.170             | 634.9    |
| LSRPM 225 ST1 | 93.9        | 96.1                   | 08401340A | 93.9                      | 273.9        | 371.0           | 371.0          | 1.35                          | 319.2                        | 119                            | 1.43                                | 3.0                 | 94.2                     | 6.170             | 844.4    |
| LSRPM 225 MR1 | 114.0       | 96.0                   | 08401340A | 114.0                     | 332.5        | 374.8           | 374.8          | 1.13                          | 347.2                        | 149                            | 1.14                                | 3.0                 | 94.1                     | 7.594             | 491.630  |
| LSRPM 225 MR1 | 114.0       | 96.0                   | 08401570A | 114.0                     | 332.5        | 428.0           | 428.0          | 1.29                          | 375.7                        | 149                            | 1.36                                | 3.0                 | 94.1                     | 7.594             | 491.630  |
| LSRPM 250 ME  | 134.1       | 96.1                   | 08401340A | 123.6                     | 360.9        | 397.0           | 397.0          | 1.10                          | 371.6                        | 155 (168)                      | 1.10                                | 3.0                 | 94.2                     | 15.425            | 628.317  |
| LSRPM 250 ME  | 134.1       | 96.1                   | 08401570A | 134.1                     | 391.2        | 456.7           | 456.7          | 1.17                          | 417.0                        | 168                            | 1.20                                | 3.0                 | 94.2                     | 15.425            | 628.317  |
| LSRPM 250 ME  | 134.1       | 96.1                   | 09402000E | 134.1                     | 391.2        | 535.1           | 535.1          | 1.37                          | 458.7                        | 168                            | 1.45                                | 3.0                 | 94.2                     | 15.425            | 628.317  |
| LSRPM 280 SC  | 167.6       | 96.3                   | 08401570A | 156.5                     | 456.7        | 502.4           | 502.4          | 1.10                          | 470.2                        | 184 (197)                      | 1.10                                | 3.0                 | 94.4                     | 19.934            | 727.525  |
| LSRPM 280 SC  | 167.6       | 96.3                   | 09402000E | 167.6                     | 489.0        | 581.1           | 581.1          | 1.19                          | 526.7                        | 197                            | 1.23                                | 3.0                 | 94.4                     | 19.934            | 727.525  |
| LSRPM 280 SC  | 167.6       | 96.3                   | 09402240E | 167.6                     | 489.0        | 670.2           | 670.2          | 1.37                          | 574.1                        | 197                            | 1.45                                | 3.0                 | 94.4                     | 19.934            | 727.525  |
| LSRPM 280 SD  | 201.2       | 96.4                   | 09402240E | 201.2                     | 586.9        | 671.4           | 671.4          | 1.14                          | 618.1                        | 250                            | 1.17                                | 3.0                 | 94.5                     | 23.730            | 837.756  |
| LSRPM 280 SD  | 201.2       | 96.4                   | 10402700E | 201.2                     | 586.9        | 781.3           | 781.3          | 1.33                          | 676.8                        | 250                            | 1.41                                | 3.0                 | 94.5                     | 23.730            | 837.756  |
| LSRPM 280 MK1 | 234.7       | 96.5                   | 10402700E | 234.7                     | 684.7        | 807.7           | 807.7          | 1.18                          | 734.3                        | 288                            | 1.22                                | 3.0                 | 94.6                     | 42.715            | 1252.224 |
| LSRPM 280 MK1 | 234.7       | 96.5                   | 10403200E | 234.7                     | 684.7        | 893.6           | 893.6          | 1.31                          | 780.1                        | 288                            | 1.38                                | 3.0                 | 94.6                     | 42.715            | 1252.224 |
| LSRPM 315 SP1 | 261.5       | 96.7                   | 10402700E | 261.5                     | 762.9        | 845.5           | 845.5          | 1.11                          | 788.8                        | 316                            | 1.11                                | 3.0                 | 94.8                     | 53.156            | 1399.934 |
| LSRPM 315 SP1 | 261.5       | 96.7                   | 10403200E | 261.5                     | 762.9        | 919.4           | 919.4          | 1.21                          | 828.6                        | 316                            | 1.26                                | 3.0                 | 94.8                     | 53.156            | 1399.934 |
| LSRPM 315 SP1 | 261.5       | 96.7                   | 11403770E | 261.5                     | 762.9        | 1,045.8         | 1,045.8        | 1.37                          | 895.7                        | 316                            | 1.45                                | 3.0                 | 94.8                     | 53.156            | 1399.934 |
| LSRPM 315 MR1 | 308.4       | 96.9                   | 10403200E | 300.9                     | 878.0        | 965.8           | 965.8          | 1.10                          | 903.7                        | 361 (370)                      | 1.10                                | 3.0                 | 95.0                     | 64.072            | 1587.326 |
| LSRPM 315 MR1 | 308.4       | 96.9                   | 11403770E | 308.4                     | 899.9        | 1,114.1         | 1,114.1        | 1.24                          | 993.2                        | 370                            | 1.30                                | 3.0                 | 95.0                     | 64.072            | 1587.326 |

(1) See the Maximum torque curve in the Introduction, Control mode section.

(2) The maximum torque decreases from 80% of the rated speed to the value indicated at the rated speed.

(3) Motors & Drives rated current. If the motor rated current is higher, its value is indicated in brackets. The motor rated current must be entered in the drive.

(4) Minimum switching frequency. This value must be entered in the drive. Automatic changing of the switching frequency must be disabled.

## Performance

### 3600 range - without encoder (Sensorless)

**Class F - DT80K - S1 Self-Cooled - Altitude 1000 m max - Ambient temperature 40°C max**

460 V drive input voltage

|  |             |
|--|-------------|
|  | Drive limit |
|  | Motor limit |

| MOTOR         |             |                        | DRIVE     | MOTOR & DRIVE COMBINATION |              |                 |                |                               |                              |                                |                                     |                     |                          |                   | MOTOR    |      |
|---------------|-------------|------------------------|-----------|---------------------------|--------------|-----------------|----------------|-------------------------------|------------------------------|--------------------------------|-------------------------------------|---------------------|--------------------------|-------------------|----------|------|
| Type          | Rated power | Efficiency IEC 6003421 | Unidrive  | Available power           | Rated torque | Starting torque | Maximum torque | Maximum torque / Rated torque | Maximum Torque @ rated speed | Full load current Drive(Motor) | Maximum current / Full load current | Switching frequency | Motor & drive efficiency | Moment of inertia | Weight   |      |
|               | Pr          | η                      |           | Pn                        | Tr           | Ts              | Tmax           | Tmax/Tr                       |                              | FLC                            | Imax / FLC                          | Fs                  | η                        | J                 | IM B3    |      |
|               | (hp)        | (%)                    |           | M600-                     | (hp)         | (lb-ft)         | (lb-ft)        | (lb-ft) (1)                   |                              | (lb-ft) (2)                    | (Amps) (3)                          |                     | (kHz) (4)                | (%)               | (lb-ft²) | (lb) |
| LSRPM 132 M   | 23.602      | 94.5                   | 06400350A | 23.6                      | 34.4         | 20.7            | 41.4           | 1.20                          | 34.4                         | 31                             | 1.25                                | 8.0                 | 92.6                     | 0.392             | 88.2     |      |
| LSRPM 132 M   | 29.502      | 94.5                   | 06400350A | 29.5                      | 43.1         | 25.8            | 47.3           | 1.10                          | 43.1                         | 38                             | 1.10                                | 8.0                 | 92.6                     | 0.548             | 97.0     |      |
| LSRPM 132 M   | 29.502      | 94.5                   | 06400420A | 29.5                      | 43.1         | 25.8            | 51.7           | 1.20                          | 43.1                         | 38                             | 1.25                                | 8.0                 | 92.6                     | 0.548             | 97.0     |      |
| LSRPM 132 M   | 34.867      | 95.0                   | 06400420A | 32.5                      | 47.4         | 28.5            | 58.3           | 1.23                          | 47.4                         | 41 (44)                        | 1.29                                | 8.0                 | 93.1                     | 0.738             | 108.0    |      |
| LSRPM 132 M   | 34.867      | 95.0                   | 06400470A | 32.5                      | 47.4         | 28.5            | 60.3           | 1.27                          | 47.4                         | 41 (44)                        | 1.34                                | 8.0                 | 93.1                     | 0.738             | 108.0    |      |
| LSRPM 132 M   | 34.867      | 95.0                   | 07400660A | 34.9                      | 50.9         | 30.5            | 61.1           | 1.20                          | 50.9                         | 44                             | 1.25                                | 8.0                 | 93.1                     | 0.738             | 108.0    |      |
| LSRPM 160 MP  | 45.595      | 95.0                   | 07400660A | 45.6                      | 66.5         | 39.9            | 79.8           | 1.20                          | 66.5                         | 56                             | 1.25                                | 8.0                 | 93.1                     | 0.992             | 132.3    |      |
| LSRPM 160 MP  | 54.982      | 95.5                   | 07400660A | 55.0                      | 80.2         | 48.2            | 96.3           | 1.20                          | 80.2                         | 67                             | 1.25                                | 8.0                 | 93.6                     | 1.220             | 152.1    |      |
| LSRPM 160 LR  | 65.710      | 95.5                   | 07400660A | 64.9                      | 94.7         | 56.8            | 104.1          | 1.10                          | 94.7                         | 79 (80)                        | 1.10                                | 8.0                 | 93.6                     | 1.486             | 174.2    |      |
| LSRPM 160 LR  | 65.710      | 95.5                   | 07400770A | 65.7                      | 95.9         | 57.5            | 115.1          | 1.20                          | 95.9                         | 80                             | 1.25                                | 8.0                 | 93.6                     | 1.486             | 174.2    |      |
| LSRPM 200 L1  | 93.871      | 96.0                   | 07401000A | 86.9                      | 126.8        | 76.0            | 139.5          | 1.10                          | 126.8                        | 112 (121)                      | 1.10                                | 4.0                 | 94.1                     | 4.034             | 337.3    |      |
| LSRPM 200 L1  | 93.871      | 96.0                   | 08401340A | 93.9                      | 137.0        | 82.2            | 164.3          | 1.20                          | 137.0                        | 121                            | 1.25                                | 4.0                 | 94.1                     | 4.034             | 337.3    |      |
| LSRPM 200 L1  | 113.987     | 96.4                   | 08401340A | 114.0                     | 166.3        | 99.8            | 195.7          | 1.18                          | 166.3                        | 140                            | 1.22                                | 4.0                 | 94.5                     | 5.221             | 392.4    |      |
| LSRPM 200 LU2 | 154.217     | 96.8                   | 08401570A | 144.7                     | 211.1        | 126.7           | 232.2          | 1.10                          | 211.1                        | 184 (196)                      | 1.10                                | 4.0                 | 94.9                     | 6.170             | 429.9    |      |
| LSRPM 200 LU2 | 154.217     | 96.8                   | 09402000E | 154.2                     | 224.9        | 135.0           | 268.3          | 1.19                          | 224.9                        | 196                            | 1.24                                | 4.0                 | 94.9                     | 6.170             | 429.9    |      |
| LSRPM 225 SG  | 177.015     | 96.8                   | 09402000E | 177.0                     | 258.2        | 154.9           | 284.7          | 1.10                          | 258.2                        | 220                            | 1.11                                | 4.0                 | 94.9                     | 12.814            | 551.2    |      |
| LSRPM 225 SG  | 177.015     | 96.8                   | 09402240E | 177.0                     | 258.2        | 154.9           | 309.8          | 1.20                          | 258.2                        | 220                            | 1.25                                | 4.0                 | 94.9                     | 12.814            | 551.2    |      |
| LSRPM 250 SE1 | 221.268     | 96.9                   | 10402700E | 221.3                     | 322.8        | 193.7           | 387.0          | 1.20                          | 322.8                        | 282                            | 1.25                                | 4.0                 | 95.0                     | 13.526            | 590.8    |      |
| LSRPM 250 SE1 | 254.794     | 97.1                   | 10402700E | 254.8                     | 371.7        | 223.0           | 419.5          | 1.13                          | 371.7                        | 307                            | 1.15                                | 4.0                 | 95.2                     | 15.425            | 634.9    |      |
| LSRPM 250 SE1 | 254.794     | 97.1                   | 10403200E | 254.8                     | 371.7        | 223.0           | 446.1          | 1.20                          | 371.7                        | 307                            | 1.25                                | 4.0                 | 95.2                     | 15.425            | 634.9    |      |
| LSRPM 280 SD1 | 321.845     | 97.1                   | 11403770E | 321.8                     | 469.5        | 281.7           | 563.4          | 1.20                          | 469.5                        | 380                            | 1.25                                | 4.0                 | 95.2                     | 23.730            | 844.4    |      |

(1) See the Maximum torque curve in the Introduction, Control mode section.

(2) The maximum torque decreases from 80% of the rated speed to the value indicated at the rated speed.

(3) Motors & Drives rated current. If the motor rated current is higher, its value is indicated in brackets. The motor rated current must be entered in the drive.

(4) Minimum switching frequency. This value must be entered in the drive. Automatic changing of the switching frequency must be disabled.



## Performance

### 3600 range - with encoder

**Class F - DT80K - S1 Self-Cooled - Altitude 1000 m max - Ambient temperature 40°C max**

460 V drive input voltage

|  |             |
|--|-------------|
|  | Drive limit |
|  | Motor limit |

| MOTOR         |             |                        | DRIVE     | MOTOR & DRIVE COMBINATION |              |                 |                |                               |                              |                                |                                     |                     |                          | MOTOR                 |        |
|---------------|-------------|------------------------|-----------|---------------------------|--------------|-----------------|----------------|-------------------------------|------------------------------|--------------------------------|-------------------------------------|---------------------|--------------------------|-----------------------|--------|
| Type          | Rated power | Efficiency IEC 6003421 | Unidrive  | Available power           | Rated torque | Starting torque | Maximum torque | Maximum torque / Rated torque | Maximum Torque @ rated speed | Full load current Drive(Motor) | Maximum current / Full load current | Switching frequency | Motor & drive efficiency | Moment of inertia     | Weight |
|               | Pr          | η                      |           | Pn                        | Tr           | Ts              | Tmax           | Tmax/Tr                       |                              | FLC                            | I <sub>max</sub> / FLC              | F <sub>s</sub>      | η                        | J                     | IM B3  |
|               | (hp)        | (%)                    |           | (hp)                      | (lb-ft)      | (lb-ft)         | (lb-ft) (1)    |                               | (lb-ft) (2)                  | (Amps) (3)                     |                                     | (kHz) (4)           | (%)                      | (lb-ft <sup>2</sup> ) | (lb)   |
| LSRPM 132 M   | 23.6        | 94.5                   | 06400350A | 23.6                      | 34.4         | 45.4            | 45.4           | 1.32                          | 39.5                         | 30                             | 1.39                                | 8.0                 | 92.6                     | 0.392                 | 88.2   |
| LSRPM 132 M   | 29.5        | 94.5                   | 06400350A | 29.5                      | 43.1         | 48.2            | 48.2           | 1.12                          | 44.8                         | 37                             | 1.13                                | 8.0                 | 92.6                     | 0.548                 | 97.0   |
| LSRPM 132 M   | 29.5        | 94.5                   | 06400420A | 29.5                      | 43.1         | 58.1            | 58.1           | 1.35                          | 50.1                         | 37                             | 1.43                                | 8.0                 | 92.6                     | 0.548                 | 97.0   |
| LSRPM 132 M   | 34.9        | 95.0                   | 06400420A | 33.3                      | 48.5         | 59.7            | 59.7           | 1.23                          | 53.3                         | 41 (43)                        | 1.29                                | 8.0                 | 93.1                     | 0.738                 | 108.0  |
| LSRPM 132 M   | 34.9        | 95.0                   | 06400470A | 33.3                      | 48.5         | 70.0            | 70.0           | 1.44                          | 58.8                         | 41 (43)                        | 1.52                                | 8.0                 | 93.1                     | 0.738                 | 108.0  |
| LSRPM 132 M   | 34.9        | 95.0                   | 07400660A | 34.9                      | 50.9         | 69.8            | 69.8           | 1.37                          | 59.7                         | 43                             | 1.45                                | 8.0                 | 93.1                     | 0.738                 | 108.0  |
| LSRPM 160 MP  | 45.6        | 95.0                   | 07400660A | 45.6                      | 66.5         | 91.2            | 91.2           | 1.37                          | 78.1                         | 55                             | 1.45                                | 8.0                 | 93.1                     | 0.992                 | 132.3  |
| LSRPM 160 MP  | 55.0        | 95.5                   | 07400660A | 55.0                      | 80.2         | 103.3           | 103.3          | 1.29                          | 90.6                         | 64                             | 1.36                                | 8.0                 | 93.6                     | 1.220                 | 152.1  |
| LSRPM 160 MP  | 55.0        | 95.5                   | 07400770A | 55.0                      | 80.2         | 110.0           | 110.0          | 1.37                          | 94.2                         | 64                             | 1.45                                | 8.0                 | 93.6                     | 1.220                 | 152.1  |
| LSRPM 160 LR  | 65.7        | 95.5                   | 07400660A | 65.7                      | 95.9         | 107.1           | 107.1          | 1.12                          | 99.6                         | 77                             | 1.13                                | 8.0                 | 93.6                     | 1.486                 | 174.2  |
| LSRPM 160 LR  | 65.7        | 95.5                   | 07400770A | 65.7                      | 95.9         | 122.1           | 122.1          | 1.27                          | 107.7                        | 77                             | 1.34                                | 8.0                 | 93.6                     | 1.486                 | 174.2  |
| LSRPM 160 LR  | 65.7        | 95.5                   | 07401000A | 65.7                      | 95.9         | 131.3           | 131.3          | 1.37                          | 112.5                        | 77                             | 1.45                                | 8.0                 | 93.6                     | 1.486                 | 174.2  |
| LSRPM 200 L1  | 93.9        | 96.0                   | 07401000A | 93.9                      | 137.0        | 151.5           | 151.5          | 1.11                          | 141.4                        | 111                            | 1.11                                | 4.0                 | 94.1                     | 4.034                 | 337.3  |
| LSRPM 200 L1  | 93.9        | 96.0                   | 08401340A | 93.9                      | 137.0        | 187.8           | 187.8          | 1.37                          | 160.8                        | 111                            | 1.45                                | 4.0                 | 94.1                     | 4.034                 | 337.3  |
| LSRPM 200 L1  | 114.0       | 96.4                   | 08401340A | 114.0                     | 166.3        | 206.2           | 206.2          | 1.24                          | 183.7                        | 131                            | 1.30                                | 4.0                 | 94.5                     | 5.221                 | 392.4  |
| LSRPM 200 L1  | 114.0       | 96.4                   | 08401570A | 114.0                     | 166.3        | 228.0           | 228.0          | 1.37                          | 195.3                        | 131                            | 1.45                                | 4.0                 | 94.5                     | 5.221                 | 392.4  |
| LSRPM 200 LU2 | 154.2       | 96.8                   | 08401570A | 153.4                     | 223.8        | 246.1           | 246.1          | 1.10                          | 230.3                        | 184 (185)                      | 1.10                                | 4.0                 | 94.9                     | 6.170                 | 429.9  |
| LSRPM 200 LU2 | 154.2       | 96.8                   | 09402000E | 154.2                     | 224.9        | 281.2           | 281.2          | 1.25                          | 249.7                        | 185                            | 1.31                                | 4.0                 | 94.9                     | 6.170                 | 429.9  |
| LSRPM 200 LU2 | 154.2       | 96.8                   | 09402240E | 154.2                     | 224.9        | 308.3           | 308.3          | 1.37                          | 264.0                        | 185                            | 1.45                                | 4.0                 | 94.9                     | 6.170                 | 429.9  |
| LSRPM 225 SG  | 177.0       | 96.8                   | 09402000E | 177.0                     | 258.2        | 296.0           | 296.0          | 1.15                          | 272.3                        | 207                            | 1.17                                | 4.0                 | 94.9                     | 12.814                | 551.2  |
| LSRPM 225 SG  | 177.0       | 96.8                   | 09402240E | 177.0                     | 258.2        | 345.1           | 345.1          | 1.34                          | 298.5                        | 207                            | 1.41                                | 4.0                 | 94.9                     | 12.814                | 551.2  |
| LSRPM 250 SE1 | 221.3       | 96.9                   | 10402700E | 221.3                     | 322.8        | 406.0           | 406.0          | 1.26                          | 359.6                        | 266                            | 1.32                                | 4.0                 | 95.0                     | 13.526                | 590.8  |
| LSRPM 250 SE1 | 254.8       | 97.1                   | 10402700E | 254.8                     | 371.7        | 443.2           | 443.2          | 1.19                          | 401.1                        | 284                            | 1.24                                | 4.0                 | 95.2                     | 15.425                | 634.9  |
| LSRPM 250 SE1 | 254.8       | 97.1                   | 10403200E | 254.8                     | 371.7        | 491.5           | 491.5          | 1.32                          | 426.9                        | 284                            | 1.40                                | 4.0                 | 95.2                     | 15.425                | 634.9  |
| LSRPM 280 SD1 | 321.8       | 97.1                   | 10402700E | 296.8                     | 433.0        | 476.3           | 476.3          | 1.10                          | 445.7                        | 320 (347)                      | 1.10                                | 4.0                 | 95.2                     | 23.730                | 844.4  |
| LSRPM 280 SD1 | 321.8       | 97.1                   | 10403200E | 314.5                     | 458.7        | 525.0           | 525.0          | 1.14                          | 483.2                        | 339 (347)                      | 1.17                                | 4.0                 | 95.2                     | 23.730                | 844.4  |
| LSRPM 280 SD1 | 321.8       | 97.1                   | 11403770E | 321.8                     | 469.5        | 615.4           | 615.4          | 1.31                          | 536.3                        | 347                            | 1.39                                | 4.0                 | 95.2                     | 23.730                | 844.4  |

(1) See the Maximum torque curve in the Introduction, Control mode section.

(2) The maximum torque decreases from 80% of the rated speed to the value indicated at the rated speed.

(3) Motors & Drives rated current. If the motor rated current is higher, its value is indicated in brackets. The motor rated current must be entered in the drive.


(4) Minimum switching frequency. This value must be entered in the drive. Automatic changing of the switching frequency must be disabled.

## Performance


### 1800 range - 0 to 1,800 rpm performance

#### Thermal torque (S1 duty without forced ventilation) and efficiency curves

##### Torque from 0 to 107 lb-ft

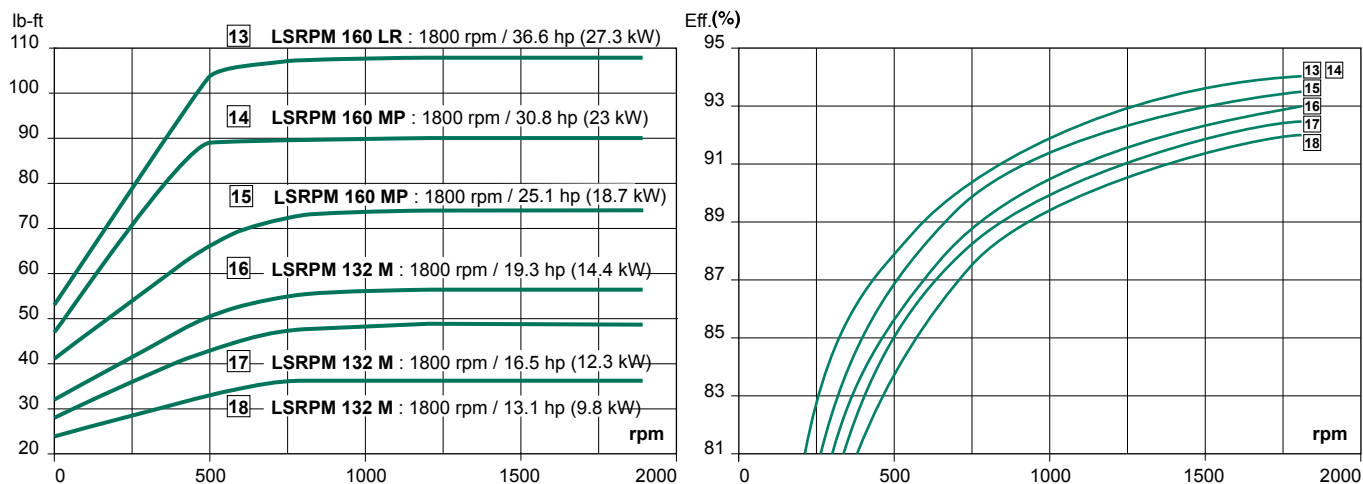

##### Torque from 107 to 333 lb-ft

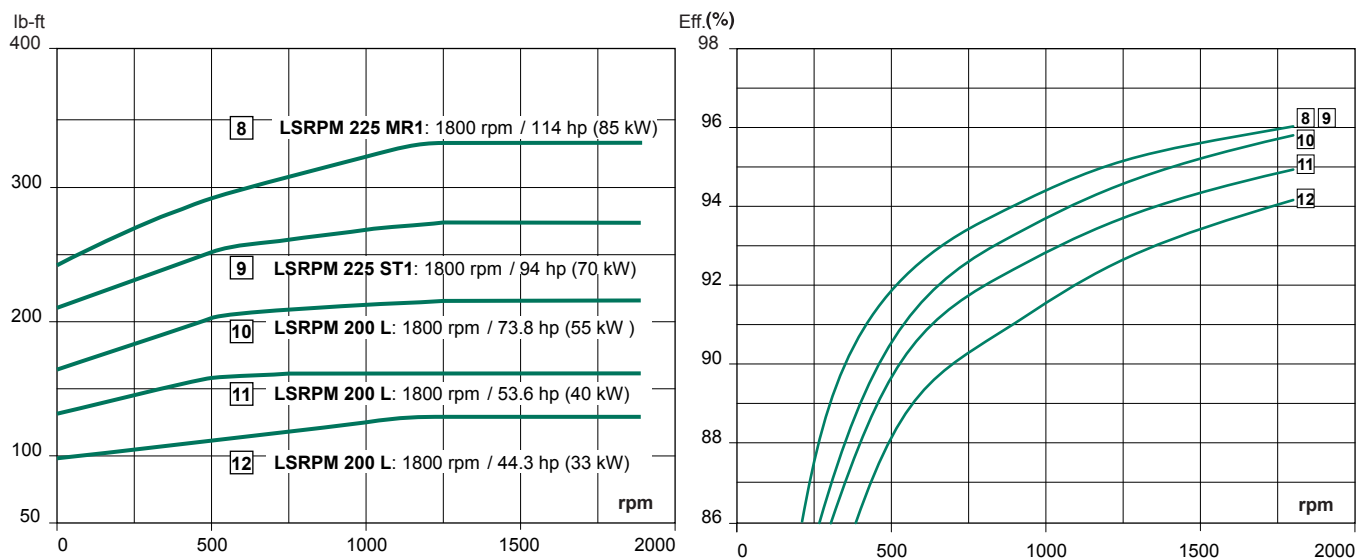



LSRPM motors with higher output power are also available.

## Performance



### 1800 range - 0 to 1,800 rpm performance

#### Thermal torque (S1 duty without forced ventilation) and efficiency curves

##### Torque from 333 to 585 lb-ft

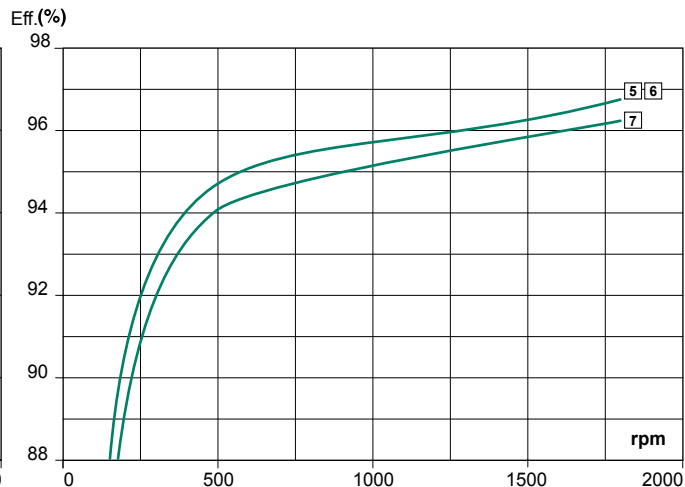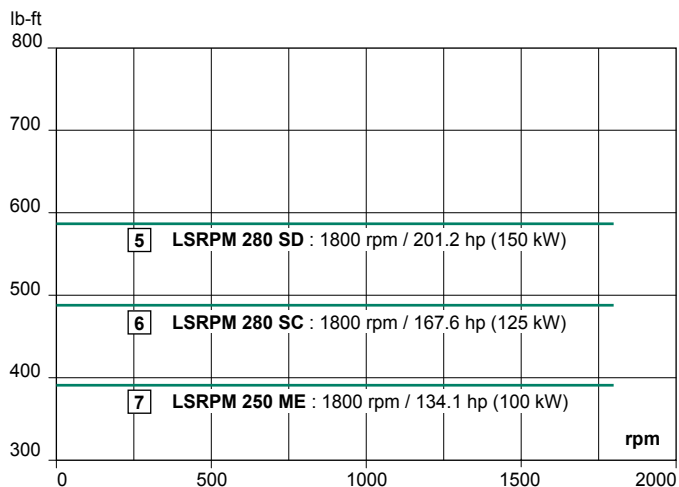

##### Torque from 585 to 900 lb-ft

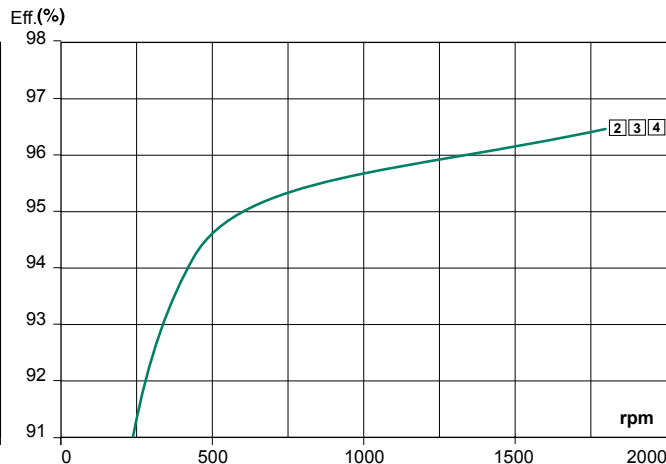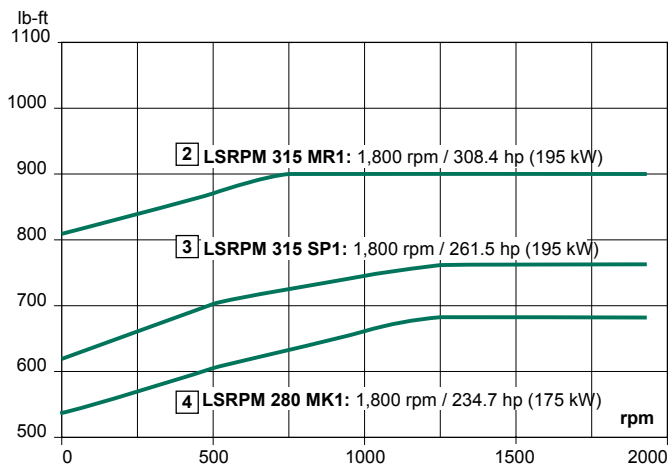



LSRPM motors with higher output power are also available.

## Performance



### 3600 range - 0 to 3,600 rpm performance

#### Thermal torque (S1 duty without forced ventilation) and efficiency curves



##### Torque from 0 to 96 lb-ft

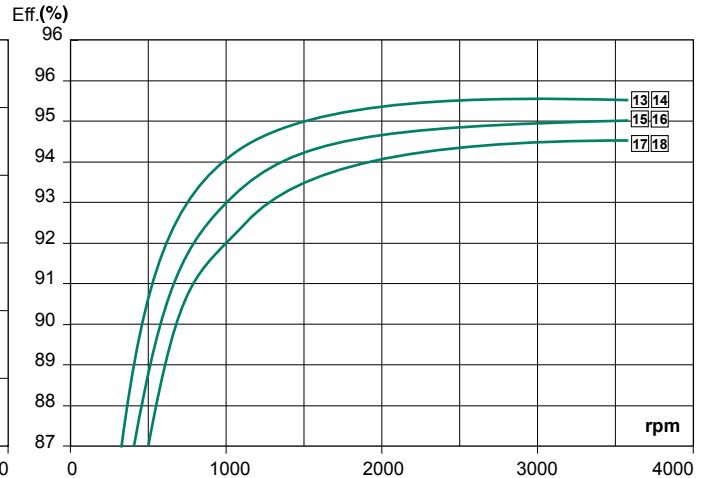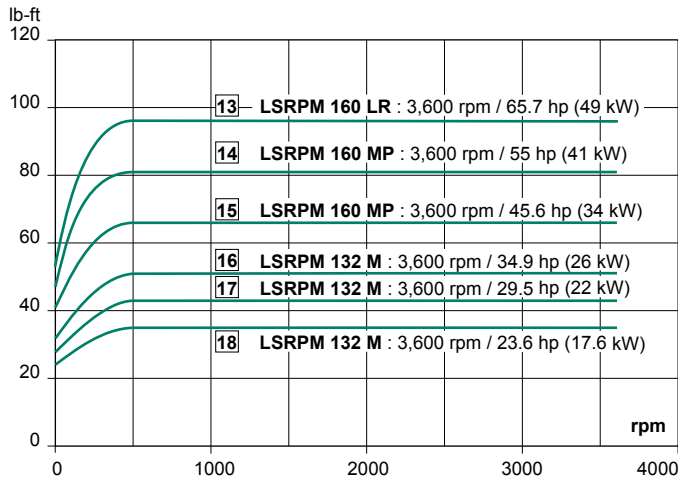

##### Torque from 96 to 225 lb-ft

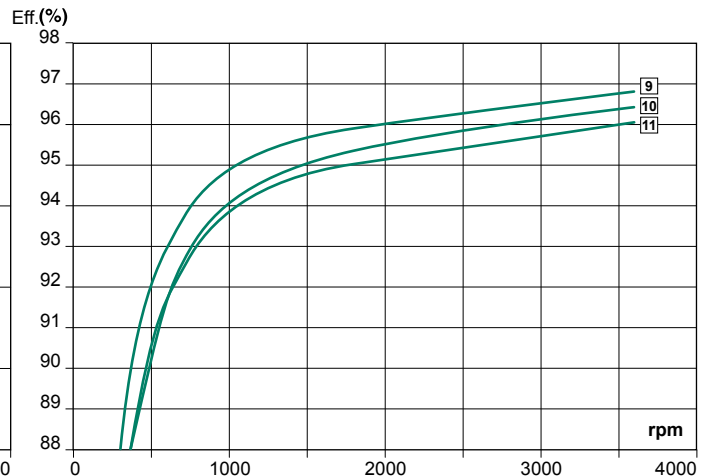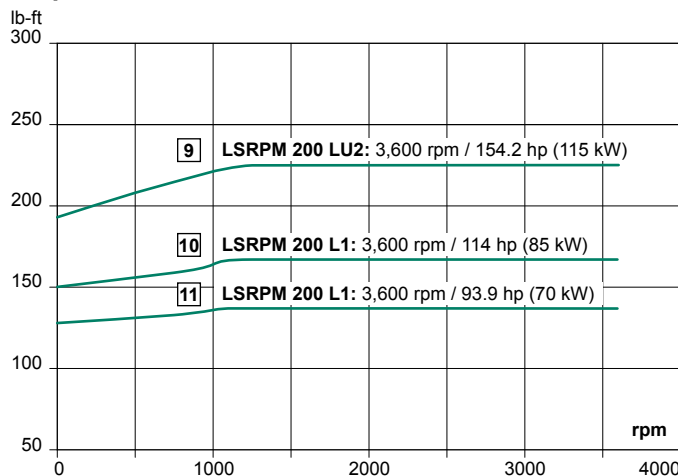


##### Torque from 225 to 470 lb-ft

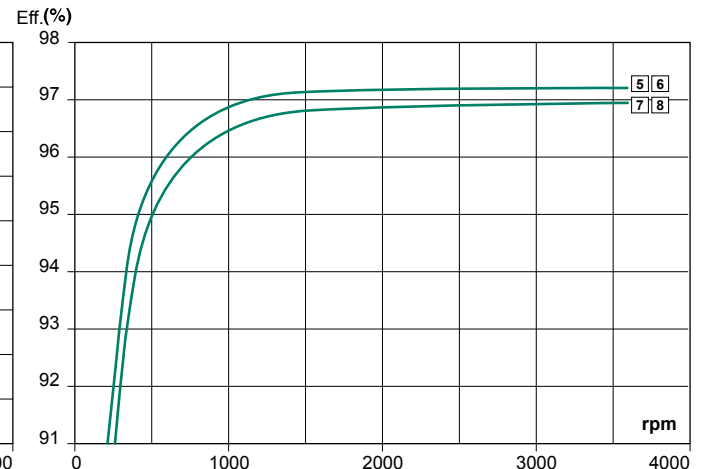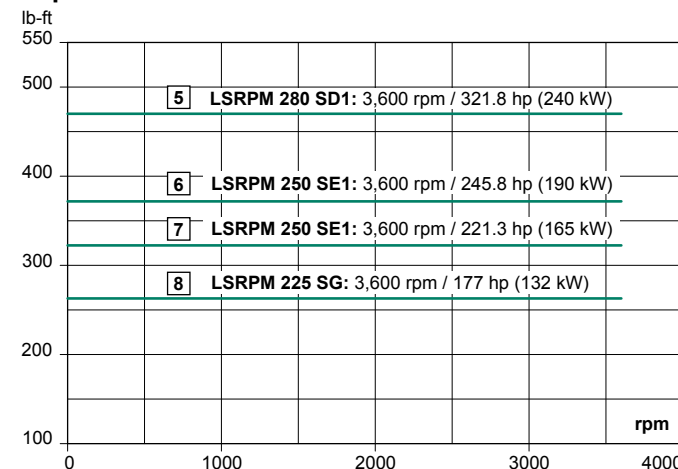

LSRPM motors with higher output power are also available.

## Drive dimensions and weights

### Unidrive M

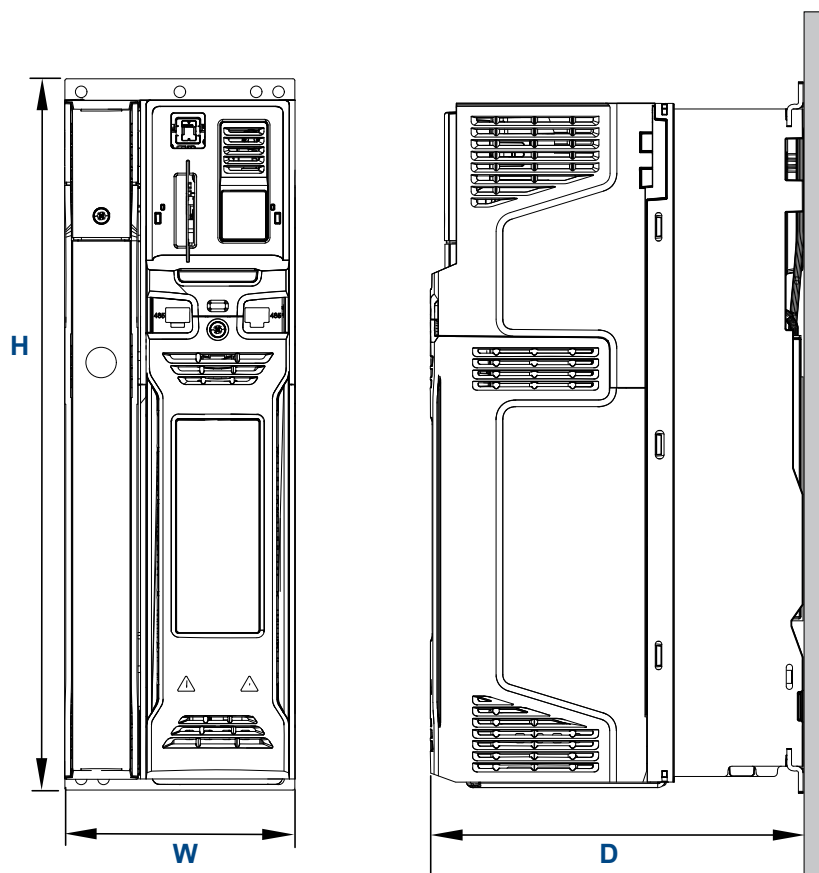


| Drive type             | Dimensions and weights |      |      |      |      |      |        |      |
|------------------------|------------------------|------|------|------|------|------|--------|------|
| Unidrive M600 and M700 | H                      |      | W    |      | D    |      | Weight |      |
|                        | (in)                   | (mm) | (in) | (mm) | (in) | (mm) | (lbs)  | (kg) |
| Size 03                | 15.0                   | 382  | 3.3  | 83   | 7.9  | 200  | 9.9    | 4.5  |
| Size 04                | 15.4                   | 391  | 4.9  | 124  | 7.9  | 200  | 14.3   | 6.5  |
| Size 05                | 15.4                   | 391  | 5.6  | 143  | 7.6  | 202  | 16.3   | 7.4  |
| Size 06                | 15.4                   | 389  | 8.3  | 210  | 8.9  | 227  | 30.9   | 14   |
| Size 07                | 21.9                   | 557  | 10.6 | 270  | 11.0 | 280  | 61.7   | 28   |
| Size 08                | 31.6                   | 803  | 12.2 | 310  | 11.4 | 290  | 114.6  | 52   |
| Size 9A                | 43.6                   | 1108 | 12.2 | 310  | 11.4 | 290  | 146.6  | 66.5 |
| Size 9E                | 42.1                   | 1069 | 12.2 | 310  | 11.4 | 290  | 101.4  | 46   |
| Size 10E               | 42.1                   | 1069 | 12.2 | 310  | 11.4 | 290  | 101.4  | 46   |
| Size 11E               | 48.9                   | 1242 | 12.2 | 310  | 12.3 | 312  | 138.9  | 63   |



# Motor dimensions

## Motor shaft dimensions

Dimensions in millimeters

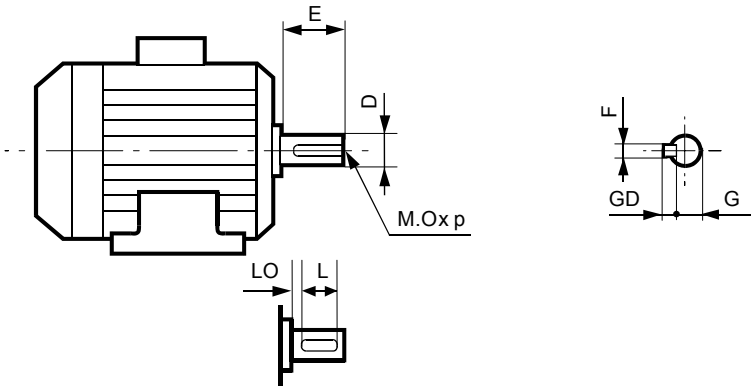


| Type                         | Main shaft dimensions |    |      |      |     |    |    |     |     |
|------------------------------|-----------------------|----|------|------|-----|----|----|-----|-----|
|                              | 1500 to 5500 range    |    |      |      |     |    |    |     |     |
|                              | F                     | GD | D    | G    | E   | O  | p  | L   | LO  |
| LSRPM 90 SL                  | 8                     | 7  | 28j6 | 24   | 60  | 10 | 22 | 50  | 6   |
| LSRPM 100 L                  | 10                    | 8  | 32k6 | 27   | 80  | 12 | 28 | 63  | 8.5 |
| LSRPM 132 M                  | 10                    | 8  | 38k6 | 33   | 80  | 12 | 28 | 63  | 7   |
| LSRPM 160 MP/LR              | 14                    | 9  | 48k6 | 42.5 | 110 | 16 | 36 | 98  | 6   |
| LSRPM 200 L/L1/L2/LU/LU2     | 16                    | 10 | 55m6 | 49   | 110 | 20 | 42 | 97  | 13  |
| LSRPM 225 ST1/ST2/SR2/SG/MR1 | 18                    | 11 | 60m6 | 53   | 140 | 20 | 42 | 126 | 14  |
| LSRPM 250 SE/SE1/ME/ME1/MY   | 18                    | 11 | 65m6 | 58   | 140 | 20 | 42 | 126 | 14  |
| LSRPM 280 SC/SD/SD1          | 20                    | 12 | 70m6 | 62.5 | 140 | 20 | 42 | 125 | 15  |
| LSRPM 280 MK1/SCM            | 20                    | 12 | 75m6 | 67.5 | 140 | 20 | 42 | 125 | 15  |
| LSRPM 315 SP1/SN             | 22                    | 14 | 80m6 | 71   | 170 | 20 | 42 | 155 | 15  |
| LSRPM 315 MR1/MP1/SR1        | 22                    | 14 | 85m6 | 76   | 170 | 20 | 42 | 155 | 15  |

## Motor dimensions

### Foot mounted IM B3 (IM 1001) motor dimensions

Dimensions in millimeters


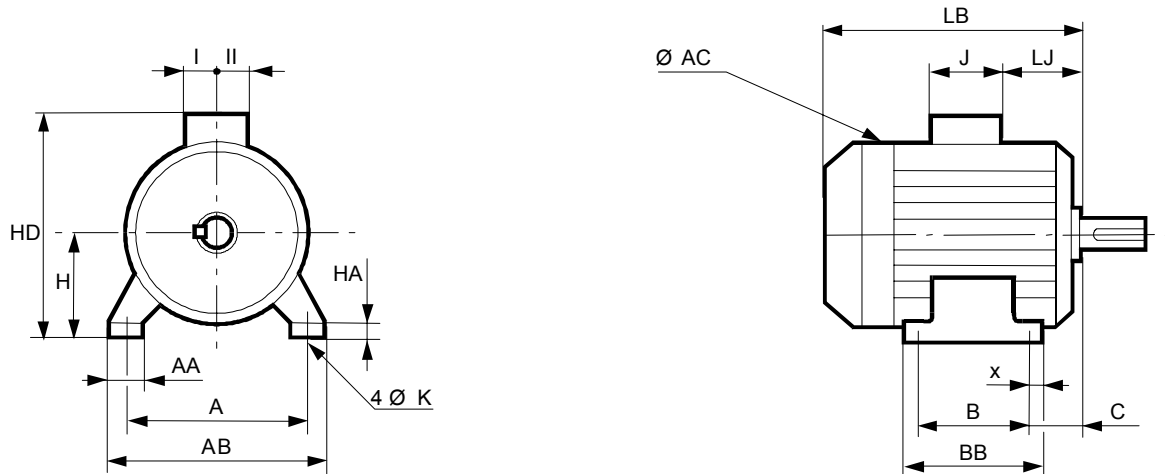


| Type          | Main dimensions |     |     |     |     |    |     |      |    |     |     |     |      |    |     |     |     |
|---------------|-----------------|-----|-----|-----|-----|----|-----|------|----|-----|-----|-----|------|----|-----|-----|-----|
|               | A               | AB  | B   | BB  | C   | X  | AA  | K    | HA | H   | AC  | HD  | LB   | LJ | J   | I   | II  |
| LSRPM 90 SL   | 140             | 172 | 100 | 166 | 56  | 29 | 39  | 10   | 11 | 90  | 200 | 245 | 329  | 14 | 160 | 55  | 55  |
| LSRPM 100 L   | 160             | 196 | 140 | 167 | 63  | 13 | 40  | 13   | 13 | 100 | 236 | 260 | 376  | 15 | 160 | 55  | 55  |
| LSRPM 132 M   | 216             | 250 | 178 | 211 | 89  | 16 | 50  | 12   | 15 | 132 | 280 | 341 | 461  | 23 | 194 | 79  | 78  |
| LSRPM 160 MP  | 254             | 294 | 254 | 298 | 108 | 22 | 64  | 14   | 25 | 160 | 310 | 391 | 555  | 53 | 186 | 112 | 95  |
| LSRPM 160 LR  | 254             | 294 | 254 | 298 | 108 | 22 | 64  | 14   | 25 | 160 | 310 | 391 | 571  | 53 | 186 | 112 | 95  |
| LSRPM 200 L   | 318             | 388 | 305 | 375 | 133 | 35 | 103 | 18.5 | 36 | 200 | 390 | 476 | 621  | 77 | 186 | 112 | 98  |
| LSRPM 200 L1  | 318             | 388 | 305 | 375 | 133 | 35 | 103 | 18.5 | 36 | 200 | 390 | 510 | 621  | 55 | 231 | 119 | 141 |
| LSRPM 200 L2  | 318             | 388 | 305 | 375 | 133 | 35 | 103 | 18.5 | 36 | 200 | 390 | 564 | 621  | 59 | 292 | 151 | 181 |
| LSRPM 200 LU  | 318             | 388 | 305 | 375 | 133 | 35 | 103 | 18.5 | 36 | 200 | 390 | 476 | 669  | 77 | 186 | 112 | 98  |
| LSRPM 200 LU2 | 318             | 388 | 305 | 375 | 133 | 35 | 103 | 18.5 | 36 | 200 | 390 | 564 | 669  | 59 | 292 | 151 | 181 |
| LSRPM 225 ST1 | 356             | 431 | 286 | 386 | 149 | 50 | 127 | 18.5 | 36 | 225 | 390 | 535 | 627  | 61 | 231 | 119 | 141 |
| LSRPM 225 ST2 | 356             | 431 | 286 | 386 | 149 | 50 | 127 | 18.5 | 36 | 225 | 390 | 589 | 627  | 66 | 292 | 151 | 181 |
| LSRPM 225 SR2 | 356             | 431 | 286 | 386 | 149 | 50 | 127 | 18.5 | 36 | 225 | 390 | 589 | 676  | 66 | 292 | 151 | 181 |
| LSRPM 225 MR1 | 356             | 431 | 311 | 386 | 149 | 50 | 127 | 18.5 | 36 | 225 | 390 | 535 | 676  | 68 | 231 | 119 | 141 |
| LSRPM 225 SG  | 356             | 420 | 286 | 375 | 149 | 30 | 65  | 18.5 | 33 | 225 | 479 | 630 | 810  | 68 | 292 | 151 | 181 |
| LSRPM 250 MY  | 406             | 470 | 349 | 449 | 168 | 70 | 150 | 24   | 47 | 250 | 390 | 560 | 627  | 61 | 231 | 119 | 141 |
| LSRPM 250 SE  | 406             | 470 | 311 | 420 | 168 | 35 | 90  | 24   | 36 | 250 | 479 | 655 | 810  | 68 | 292 | 151 | 181 |
| LSRPM 250 SE1 | 406             | 470 | 311 | 420 | 168 | 35 | 90  | 24   | 36 | 250 | 479 | 744 | 810  | 4  | 420 | 180 | 235 |
| LSRPM 250 ME  | 406             | 470 | 349 | 420 | 168 | 35 | 90  | 24   | 36 | 250 | 479 | 655 | 810  | 68 | 292 | 151 | 181 |
| LSRPM 250 ME1 | 406             | 470 | 349 | 420 | 168 | 35 | 90  | 24   | 36 | 250 | 479 | 744 | 810  | 4  | 420 | 180 | 235 |
| LSRPM 280 SC  | 457             | 520 | 368 | 478 | 190 | 35 | 90  | 24   | 35 | 280 | 479 | 685 | 810  | 68 | 292 | 148 | 180 |
| LSRPM 280 SCM | 457             | 520 | 368 | 478 | 190 | 35 | 90  | 24   | 35 | 280 | 479 | 685 | 810  | 68 | 292 | 151 | 181 |
| LSRPM 280 SD  | 457             | 520 | 368 | 478 | 190 | 35 | 90  | 24   | 35 | 280 | 479 | 685 | 870  | 68 | 292 | 148 | 180 |
| LSRPM 280 SD1 | 457             | 520 | 368 | 478 | 190 | 35 | 90  | 24   | 35 | 280 | 479 | 774 | 870  | 4  | 420 | 180 | 235 |
| LSRPM 280 MK1 | 457             | 533 | 419 | 495 | 190 | 40 | 85  | 24   | 35 | 280 | 586 | 835 | 921  | 35 | 420 | 180 | 235 |
| LSRPM 315 SN  | 508             | 594 | 406 | 537 | 216 | 40 | 140 | 28   | 50 | 315 | 479 | 720 | 870  | 68 | 292 | 151 | 181 |
| LSRPM 315 SP1 | 508             | 594 | 406 | 537 | 216 | 40 | 114 | 28   | 70 | 315 | 586 | 870 | 947  | 61 | 420 | 180 | 235 |
| LSRPM 315 SR1 | 508             | 594 | 406 | 537 | 216 | 40 | 114 | 28   | 70 | 315 | 586 | 870 | 1017 | 62 | 420 | 180 | 235 |
| LSRPM 315 MP1 | 508             | 594 | 457 | 537 | 216 | 40 | 114 | 28   | 70 | 315 | 586 | 870 | 947  | 61 | 420 | 180 | 235 |
| LSRPM 315 MR1 | 508             | 594 | 457 | 537 | 216 | 40 | 114 | 28   | 70 | 315 | 586 | 870 | 1017 | 61 | 420 | 180 | 235 |

## Motor dimensions

### Foot and flange mounted IM B35 (IM 2001) motor dimensions

Dimensions in millimeters

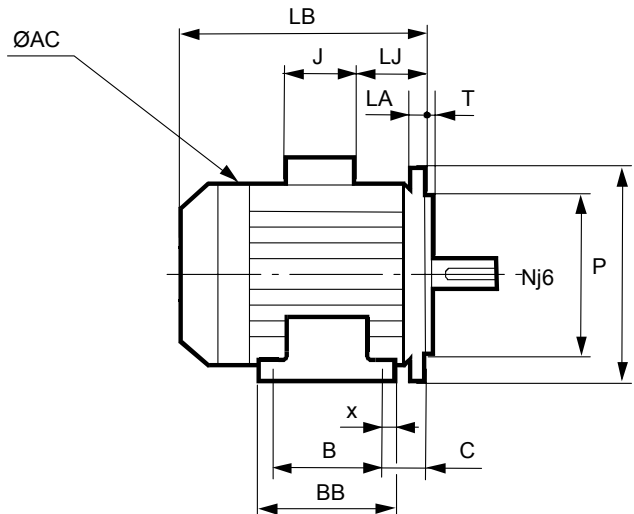
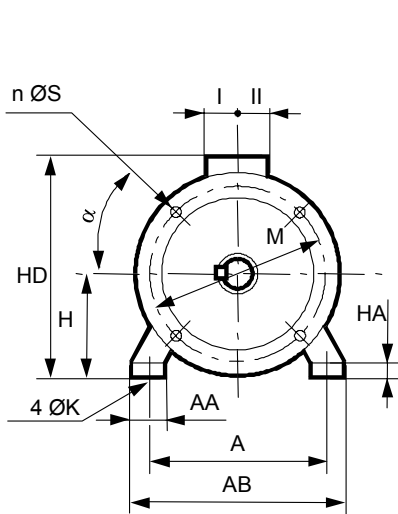


| Type          | Main dimensions |     |     |     |     |    |     |      |    |     |     |     |      |    |     |     |     |       |
|---------------|-----------------|-----|-----|-----|-----|----|-----|------|----|-----|-----|-----|------|----|-----|-----|-----|-------|
|               | A               | AB  | B   | BB  | C   | X  | AA  | K    | HA | H   | AC  | HD  | LB   | LJ | J   | I   | II  | Sym.  |
| LSRPM 90 SL   | 140             | 172 | 100 | 166 | 56  | 29 | 39  | 10   | 11 | 90  | 200 | 245 | 351  | 14 | 160 | 55  | 55  | FF165 |
| LSRPM 100 L   | 160             | 196 | 140 | 167 | 63  | 13 | 40  | 13   | 13 | 100 | 236 | 260 | 376  | 15 | 160 | 55  | 55  | FF215 |
| LSRPM 132 M   | 216             | 250 | 178 | 211 | 89  | 16 | 50  | 12   | 15 | 132 | 280 | 341 | 461  | 23 | 194 | 79  | 78  | FF265 |
| LSRPM 160 MP  | 254             | 294 | 254 | 298 | 108 | 22 | 64  | 14   | 25 | 160 | 310 | 391 | 555  | 53 | 186 | 112 | 95  | FF300 |
| LSRPM 160 LR  | 254             | 294 | 254 | 298 | 108 | 22 | 64  | 14   | 25 | 160 | 310 | 391 | 571  | 53 | 186 | 112 | 95  | FF300 |
| LSRPM 200 L   | 318             | 388 | 305 | 375 | 133 | 35 | 103 | 18.5 | 36 | 200 | 390 | 476 | 621  | 77 | 186 | 112 | 98  | FF350 |
| LSRPM 200 L1  | 318             | 388 | 305 | 375 | 133 | 35 | 103 | 18.5 | 36 | 200 | 390 | 510 | 621  | 55 | 231 | 119 | 141 | FF350 |
| LSRPM 200 L2  | 318             | 388 | 305 | 375 | 133 | 35 | 103 | 18.5 | 36 | 200 | 390 | 571 | 621  | 59 | 292 | 148 | 180 | FF350 |
| LSRPM 200 LU  | 318             | 388 | 305 | 375 | 133 | 35 | 103 | 18.5 | 36 | 200 | 390 | 476 | 669  | 77 | 186 | 112 | 98  | FF350 |
| LSRPM 200 LU2 | 318             | 388 | 305 | 375 | 133 | 35 | 103 | 18.5 | 36 | 200 | 390 | 571 | 669  | 59 | 292 | 148 | 180 | FF350 |
| LSRPM 225 ST1 | 356             | 431 | 286 | 386 | 149 | 50 | 127 | 18.5 | 36 | 225 | 390 | 535 | 627  | 62 | 231 | 119 | 141 | FF400 |
| LSRPM 225 ST2 | 356             | 431 | 286 | 386 | 149 | 50 | 127 | 18.5 | 36 | 225 | 390 | 596 | 627  | 66 | 292 | 148 | 180 | FF400 |
| LSRPM 225 SR2 | 356             | 431 | 286 | 386 | 149 | 50 | 127 | 18.5 | 36 | 225 | 390 | 596 | 676  | 66 | 292 | 148 | 180 | FF400 |
| LSRPM 225 MR1 | 356             | 431 | 311 | 386 | 149 | 50 | 127 | 18.5 | 36 | 225 | 390 | 535 | 676  | 68 | 231 | 119 | 141 | FF400 |
| LSRPM 225 SG  | 356             | 420 | 286 | 375 | 149 | 50 | 65  | 18.5 | 30 | 225 | 479 | 629 | 810  | 68 | 292 | 148 | 180 | FF400 |
| LSRPM 250 MY  | 406             | 470 | 349 | 449 | 168 | 70 | 150 | 24   | 47 | 250 | 390 | 560 | 628  | 61 | 231 | 119 | 142 | FF500 |
| LSRPM 250 SE  | 406             | 470 | 311 | 420 | 168 | 35 | 90  | 24   | 36 | 250 | 479 | 655 | 810  | 68 | 292 | 148 | 180 | FF500 |
| LSRPM 250 SE1 | 406             | 470 | 311 | 420 | 168 | 35 | 90  | 24   | 36 | 250 | 479 | 744 | 810  | 4  | 420 | 180 | 235 | FF500 |
| LSRPM 250 ME  | 406             | 470 | 349 | 420 | 168 | 35 | 90  | 24   | 36 | 250 | 479 | 655 | 810  | 68 | 292 | 148 | 180 | FF500 |
| LSRPM 250 ME1 | 406             | 470 | 349 | 420 | 168 | 35 | 90  | 24   | 36 | 250 | 479 | 744 | 810  | 4  | 420 | 180 | 235 | FF500 |
| LSRPM 280 SC  | 457             | 520 | 368 | 478 | 190 | 35 | 90  | 24   | 35 | 280 | 479 | 685 | 810  | 68 | 292 | 148 | 180 | FF500 |
| LSRPM 280 SCM | 457             | 520 | 368 | 478 | 190 | 35 | 90  | 24   | 35 | 280 | 479 | 686 | 810  | 68 | 292 | 151 | 181 | FF500 |
| LSRPM 280 SD  | 457             | 520 | 368 | 478 | 190 | 35 | 90  | 24   | 35 | 280 | 479 | 685 | 870  | 68 | 292 | 148 | 180 | FF500 |
| LSRPM 280 SD1 | 457             | 520 | 368 | 478 | 190 | 35 | 90  | 24   | 35 | 280 | 479 | 774 | 870  | 4  | 420 | 180 | 235 | FF500 |
| LSRPM 280 MK1 | 457             | 520 | 419 | 495 | 190 | 40 | 85  | 24   | 35 | 280 | 586 | 834 | 921  | 35 | 420 | 180 | 235 | FF500 |
| LSRPM 315 SN  | 508             | 594 | 406 | 537 | 216 | 40 | 140 | 28   | 50 | 315 | 479 | 721 | 870  | 68 | 292 | 151 | 181 | FF600 |
| LSRPM 315 SP1 | 508             | 594 | 406 | 537 | 216 | 40 | 114 | 28   | 70 | 315 | 586 | 870 | 947  | 61 | 420 | 180 | 235 | FF600 |
| LSRPM 315 SR1 | 508             | 594 | 406 | 537 | 216 | 40 | 114 | 28   | 70 | 315 | 586 | 867 | 1017 | 62 | 418 | 180 | 235 | FF600 |
| LSRPM 315 MP1 | 508             | 594 | 457 | 537 | 216 | 40 | 114 | 28   | 70 | 315 | 586 | 867 | 947  | 62 | 418 | 180 | 235 | FF600 |
| LSRPM 315 MR1 | 508             | 594 | 457 | 537 | 216 | 40 | 114 | 28   | 70 | 315 | 586 | 870 | 1017 | 61 | 420 | 180 | 235 | FF600 |

## Motor dimensions

### Flange mounted IM B5 (IM 3001)\* IM V1 (IM 3011) motor dimensions

Dimensions in millimeters

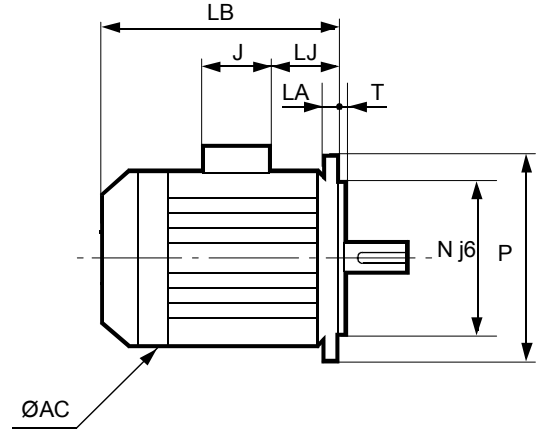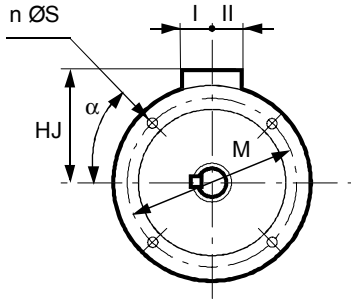

| Type          | Main dimensions |       |     |      |     |     |     |
|---------------|-----------------|-------|-----|------|-----|-----|-----|
|               | AC              | LB    | HJ  | LJ   | J   | I   | II  |
| LSRPM 90 SL   | 200             | 351   | 155 | 34   | 160 | 55  | 55  |
| LSRPM 100 L   | 200             | 376   | 160 | 15   | 160 | 55  | 55  |
| LSRPM 132 M   | 264             | 461   | 209 | 23   | 194 | 79  | 78  |
| LSRPM 160 MP  | 264             | 555   | 231 | 53   | 186 | 112 | 95  |
| LSRPM 160 LR  | 264             | 571   | 231 | 53   | 186 | 112 | 95  |
| LSRPM 200 L   | 390             | 621   | 276 | 77   | 186 | 112 | 98  |
| LSRPM 200 L1  | 390             | 621   | 310 | 55   | 231 | 119 | 141 |
| LSRPM 200 L2  | 390             | 621   | 364 | 59   | 292 | 148 | 180 |
| LSRPM 200 LU  | 390             | 669   | 276 | 77   | 186 | 112 | 98  |
| LSRPM 200 LU2 | 390             | 669   | 364 | 59   | 292 | 148 | 180 |
| LSRPM 225 ST1 | 390             | 627   | 310 | 61.5 | 231 | 119 | 141 |
| LSRPM 225 ST2 | 390             | 627   | 364 | -    | 292 | 148 | 180 |
| LSRPM 225 SR2 | 390             | 676   | 364 | -    | 292 | 148 | 180 |
| LSRPM 225 MR1 | 390             | 535   | 276 | 61.5 | 231 | 119 | 141 |
| LSRPM 225 SG  | 479             | 810   | 405 | 68   | 292 | 148 | 180 |
| LSRPM 250 MY  | 390             | 627.5 | 310 | 61   | 231 | 119 | 142 |
| LSRPM 250 SE  | 479             | 810   | 405 | 68   | 292 | 148 | 180 |
| LSRPM 250 SE1 | 479             | 810   | 494 | 4    | 420 | 180 | 235 |
| LSRPM 250 ME  | 479             | 810   | 405 | 68   | 292 | 148 | 180 |
| LSRPM 250 ME1 | 479             | 810   | 494 | 4    | 420 | 180 | 235 |
| LSRPM 280 SC  | 479             | 810   | 405 | 68   | 292 | 148 | 180 |
| LSRPM 280 SCM | 479             | 810   | 405 | 67.5 | 292 | 151 | 181 |
| LSRPM 280 SD  | 479             | 870   | 405 | 68   | 292 | 148 | 180 |
| LSRPM 280 SD1 | 479             | 870   | 494 | 4    | 420 | 180 | 235 |
| LSRPM 280 MK1 | 586             | 921   | 555 | 35   | 420 | 180 | 235 |
| LSRPM 315 SN  | 479             | 870   | 405 | 67.5 | 292 | 151 | 181 |
| LSRPM 315 SP1 | 586             | 947   | 554 | 61   | 420 | 180 | 235 |
| LSRPM 315 SR1 | 586             | 1017  | 555 | 61.5 | 418 | 180 | 235 |
| LSRPM 315 MP1 | 586             | 947   | 555 | 61.5 | 418 | 180 | 235 |
| LSRPM 315 MR1 | 586             | 1017  | 555 | 61   | 420 | 180 | 235 |

| IEC symbol | Flange dimensions |     |     |     |   |      |      |    |
|------------|-------------------|-----|-----|-----|---|------|------|----|
|            | M                 | N   | P   | T   | n | α    | S    | LA |
| FF165      | 165               | 130 | 200 | 3.5 | 4 | 45   | 12   | 10 |
| FF215      | 215               | 180 | 250 | 4   | 4 | 45   | 14.5 | 12 |
| FF265      | 265               | 230 | 300 | 4   | 4 | 45   | 14.5 | 14 |
| FF300      | 300               | 250 | 350 | 5   | 4 | 45   | 18.5 | 14 |
| FF300      | 300               | 250 | 350 | 5   | 4 | 45   | 18.5 | 14 |
| FF350      | 350               | 300 | 400 | 5   | 4 | 45   | 18.5 | 15 |
| FF350      | 350               | 300 | 400 | 5   | 4 | 45   | 18.5 | 15 |
| FF350      | 350               | 300 | 400 | 5   | 4 | 45   | 18.5 | 15 |
| FF350      | 350               | 300 | 400 | 5   | 4 | 45   | 18.5 | 15 |
| FF400      | 400               | 350 | 450 | 5   | 8 | 22.5 | 18.5 | 16 |
| FF400      | 400               | 350 | 450 | 5   | 8 | 22.5 | 18.5 | 15 |
| FF400      | 400               | 350 | 450 | 5   | 8 | 22.5 | 18.5 | 15 |
| FF400      | 400               | 350 | 450 | 5   | 8 | 22.5 | 18.5 | 16 |
| FF400      | 400               | 350 | 450 | 5   | 8 | 22.5 | 18.5 | 16 |
| FF500      | 500               | 450 | 550 | 5   | 8 | 22.5 | 18.5 | 18 |
| FF500      | 500               | 450 | 550 | 5   | 8 | 22.5 | 18.5 | 22 |
| FF500      | 500               | 450 | 550 | 5   | 8 | 22.5 | 18.5 | 22 |
| FF500      | 500               | 450 | 550 | 5   | 8 | 22.5 | 18.5 | 22 |
| FF500      | 500               | 450 | 550 | 5   | 8 | 22.5 | 18.5 | 22 |
| FF500      | 500               | 450 | 550 | 5   | 8 | 22.5 | 18.5 | 22 |
| FF500      | 500               | 450 | 550 | 5   | 8 | 22.5 | 18.5 | 22 |
| FF500      | 500               | 450 | 550 | 5   | 8 | 22.5 | 18.5 | 22 |
| FF500      | 500               | 450 | 550 | 6   | 8 | 22.5 | 18.5 | 18 |
| FF600      | 600               | 550 | 660 | 6   | 8 | 22.5 | 24   | 22 |
| FF600      | 600               | 550 | 660 | 6   | 8 | 22.5 | 24   | 22 |
| FF600      | 600               | 550 | 660 | 6   | 8 | 22.5 | 24   | 22 |
| FF600      | 600               | 550 | 660 | 6   | 8 | 22.5 | 24   | 22 |
| FF600      | 600               | 550 | 660 | 6   | 8 | 22.5 | 24   | 22 |


\* For a frame size above 250 mm for IM 3001 use, please consult Leroy-Somer.

Shaft dimensions are identical to those for foot mounted motors.

## Motor dimensions


### Foot and face mounted IM B34 (IM 2101) motor dimensions

Dimensions in millimeters

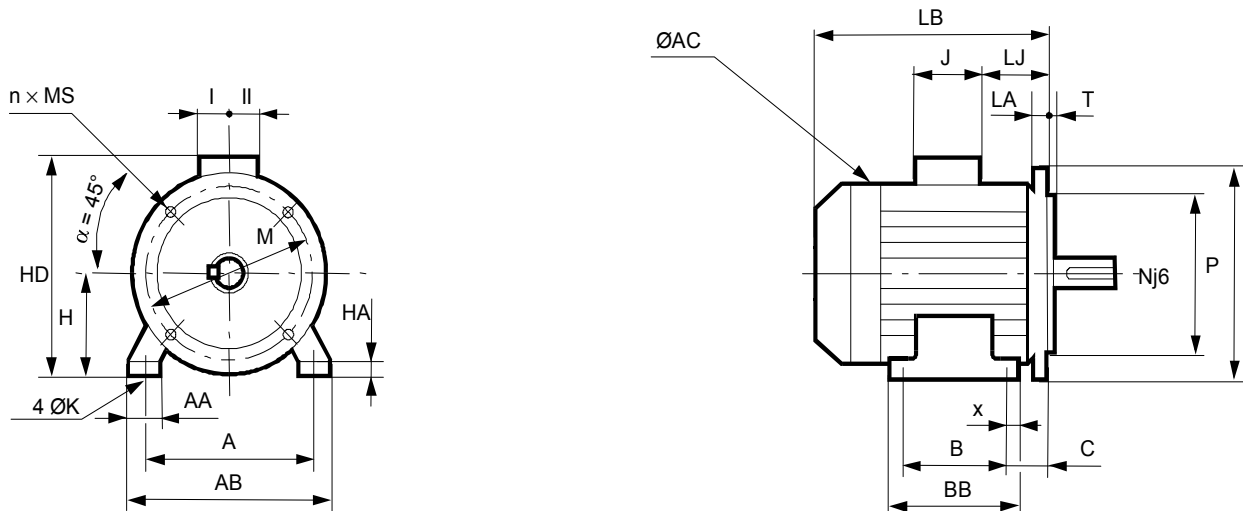

| Type        | Main dimensions |     |     |     |    |    |    |    |    |     |     |     |     |    |     |    |    |       |
|-------------|-----------------|-----|-----|-----|----|----|----|----|----|-----|-----|-----|-----|----|-----|----|----|-------|
|             | A               | AB  | B   | BB  | C  | X  | AA | K  | HA | H   | AC  | HD  | LB  | LJ | J   | I  | II | Sym.  |
| LSRPM 90 SL | 140             | 172 | 100 | 166 | 56 | 29 | 39 | 10 | 11 | 90  | 200 | 245 | 329 | 14 | 160 | 55 | 55 | FT115 |
| LSRPM 100 L | 160             | 196 | 140 | 167 | 63 | 13 | 40 | 13 | 13 | 100 | 236 | 260 | 376 | 15 | 160 | 55 | 55 | FT130 |
| LSRPM 132 M | 216             | 250 | 178 | 211 | 89 | 16 | 50 | 12 | 15 | 132 | 264 | 341 | 461 | 23 | 194 | 79 | 78 | FT215 |

### Face mounted IM B14 (IM 3601)

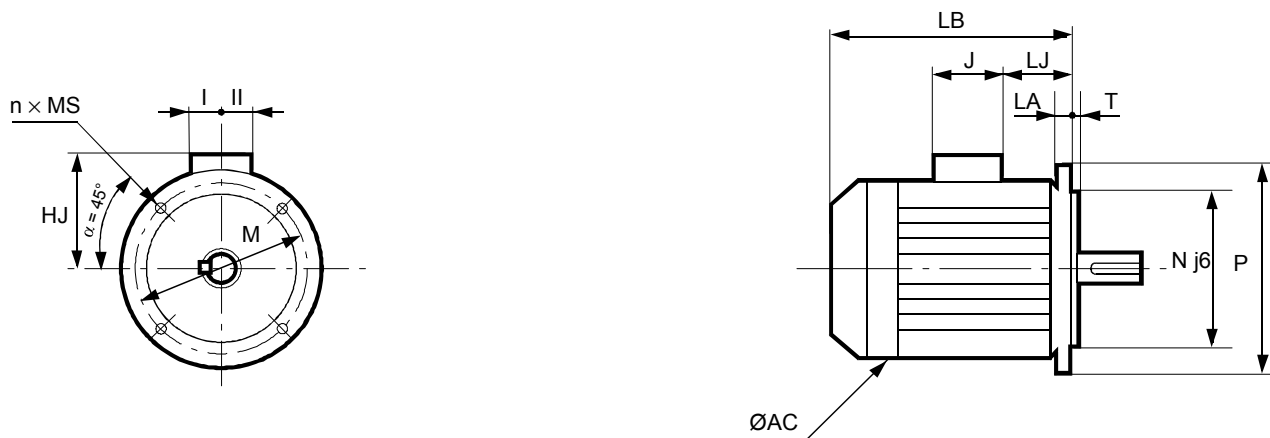

| Type        | Main dimensions |     |     |    |     |    |    |
|-------------|-----------------|-----|-----|----|-----|----|----|
|             | AC              | LB  | HJ  | LJ | J   | I  | II |
| LSRPM 90 SL | 200             | 329 | 155 | 14 | 160 | 55 | 55 |
| LSRPM 100 L | 236             | 376 | 160 | 15 | 160 | 55 | 55 |
| LSRPM 132 M | 264             | 461 | 209 | 23 | 194 | 79 | 78 |

| IEC symbol | Faceplate dimensions |     |     |     |   |     |
|------------|----------------------|-----|-----|-----|---|-----|
|            | M                    | N   | P   | T   | n | MS  |
| FT115      | 115                  | 95  | 140 | 3   | 4 | M8  |
| FT130      | 130                  | 110 | 160 | 3.5 | 4 | M8  |
| FT215      | 215                  | 180 | 250 | 4   | 4 | M12 |

Shaft dimensions are identical to those for foot mounted motors.




## Motor dimensions


## Motor options

Dimensions in millimeters


Forced ventilation unit  
B3 & B5



Incremental encoder  
B3 & B5



Forced ventilation unit and incremental encoder  
B3 & B5




| Type              | LB1  | LB2  | LB3  |
|-------------------|------|------|------|
| LSRPM 90 SL       | -    | 329  | 383  |
| LSRPM 100 L       | -    | 376  | 431  |
| LSRPM 132 M       | -    | 461  | 499  |
| LSRPM 160 MP      | -    | 555  | 710  |
| LSRPM 160 LR      | -    | 571  | 730  |
| LSRPM 200 L/L1/L2 | 802  | 674  | 802  |
| LSRPM 200 LU/LU2  | 847  | 723  | 847  |
| LSRPM 225 ST1/ST2 | 808  | 680  | 808  |
| LSRPM 225 SR2     | 854  | 730  | 854  |
| LSRPM 225 MR1     | 854  | 730  | 854  |
| LSRPM 225 SG      | 1012 | 860  | 1012 |
| LSRPM 250 MY      | 808  | 680  | 808  |
| LSRPM 250 SE/SE1  | 1012 | 860  | 1012 |
| LSRPM 250 ME/ME1  | 1012 | 860  | 1012 |
| LSRPM 280 SC/SCM  | 1012 | 860  | 1012 |
| LSRPM 280 SD/SD1  | 1072 | 920  | 1072 |
| LSRPM 280 MK1     | 1111 | 965  | 1111 |
| LSRPM 315 SP1/MP1 | 1181 | 991  | 1181 |
| LSRPM 315 SN      | 1072 | 920  | 1072 |
| LSRPM 315 MR1/SR1 | 1251 | 1061 | 1251 |

Note: Dimensions of motors with single-turn and multi-turn absolute encoders are available on request.

### Drip cover for operation in vertical position, shaft end facing down

| Motor type                | LB'       | Ø   |
|---------------------------|-----------|-----|
| LSRPM 90 SL               | LB + 20   | 185 |
| LSRPM 100 L               | LB + 20   | 185 |
| LSRPM 132 M               | LB + 30   | 240 |
| LSRPM 160 MP/LR           | LB + 30   | 236 |
| LSRPM 200 L/L1/L2/LU/LU2  | LB + 36.5 | 350 |
| LSRPM 225 ST1/ST2/MR1/SR2 | LB + 36.5 | 350 |
| LSRPM 225 SG              | LB + 55   | 350 |
| LSRPM 250 MY              | LB + 36.5 | 350 |
| LSRPM 250 SE/SE1          | LB + 55   | 350 |
| LSRPM 280 SCM/SC/SD/SD1   | LB + 55   | 350 |
| LSRPM 280 MK1             | LB + 76.5 | 505 |
| LSRPM 315 SN              | LB + 55   | 350 |
| LSRPM 315 SP1/MP1/MR1/SR1 | LB + 76.5 | 505 |

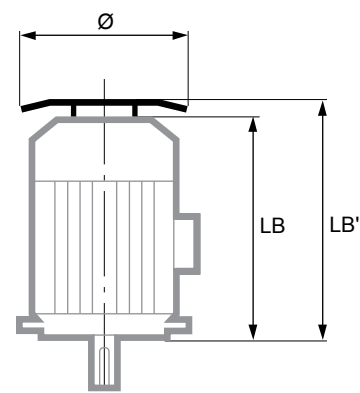

## Installation options

### General information

---

#### AC supply considerations

Each industrial power supply has its own intrinsic characteristics (short-circuit capability, voltage value and fluctuation, phase imbalance, etc.) and supplies equipment some of which can distort its voltage either permanently or temporarily (notches, voltage dips, overvoltage, etc.). The quality of the AC supply has an impact on the performance and reliability of electronic equipment, especially variable speed drives. Emerson Industrial Automation drives are designed to operate with the AC supplies typically found on industrial sites throughout the world. However, for each installation, it is important to know the characteristics of the AC supply so that you can take corrective steps in the event of abnormal conditions.

#### Transient overvoltages

There are numerous sources of overvoltages in an electrical installation:

- Connection/disconnection of banks of power factor correction capacitors
- High-power SCR-controlled equipment (oven, DC drive, etc.)
- Overhead power supplies

#### Connection/disconnection of a bank of correction capacitors $\cos \varphi$

Connecting power factor correction capacitors on the drive power supply line when the drive is running can generate transient overvoltages that may trip the drive safety devices, or even damage it in extreme cases. If banks of power factor correction capacitors are used on the power supply line, make sure that:

- The difference between steps is low enough to avoid causing overvoltage on the line
- The capacitors are not permanently connected

#### Presence of commutation notches on the line

When high-power SCR-controlled equipment is connected on the same supply as the drive, it is essential to ensure that the harmonics generated by the commutation notches do not excessively distort the AC voltage and do not create voltage peaks with amplitude higher than  $1.6 \times \text{line } V_{rms}$ . If this is the case, it is essential to take corrective measures to guarantee the line supply quality.

#### Unbalanced power supply

In the same way as can be seen on an electric motor, the line voltage imbalance of a drive can have consequences on its operation. Please refer to the drive installation manual.

#### Equipotential bonding

The equipotential earth bonding of some industrial sites is not always observed. This lack of equipotentiality leads to leakage currents that flow via the ground cables, the machine frame, the pipework, etc., and also via the electrical equipment. In some extreme cases, these currents can trip the drive.

It is essential that the ground network is designed and implemented by the installation supervisor so that its impedance is as low as possible, so as to distribute the fault currents and high-frequency currents without them passing through electrical equipment.

**Metal grounds must be mechanically connected to each other with the largest possible electrical contact area.**

Under no circumstances can ground connections designed to protect people, by linking metal grounds to earth via a cable, serve as a substitute for ground connections (see IEC 61000-5-2).


The immunity and radio-frequency emission levels are directly linked to the quality of the ground connections.

## Installation options

### Good wiring practice

#### Connection of control cables and encoder cables

CAUTION: Strip back the shielding on the metal clamp collars in order to ensure 360° contact.

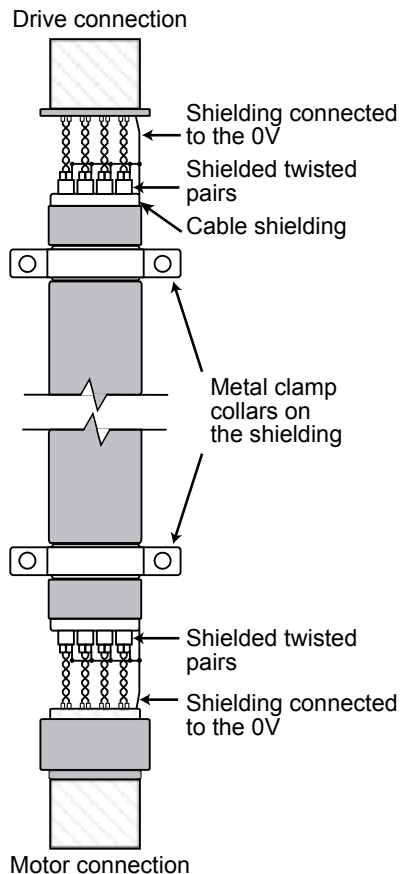


#### Power cable

It is the responsibility of the user and/or the installer to connect the motor-drive system in accordance with the current legislation and regulations in the country of use. This is particularly important as concerns cable size and connection of earths and grounds.

The following information is given for guidance only, and should never be used as a substitute for the current standards, nor does it relieve the installation company of their responsibility. For more information, please refer to technical specification IEC 60034-25.

To ensure the safety of personnel, the size of the earthing cables should be determined individually in accordance with local regulations.

For compliance with standard EN 61800-3, the power conductors between drive and motor must be shielded. Use a special variable speed cable: shielded with low stray capacity and with 3 protective earth (PE) conductors arranged at 120° (diagram below). There is no need to shield the drive power supply cables.



The motor-drive unit wiring must be symmetrical (U,V,W at the motor end must correspond to U,V,W at the drive end) with the cable shielding grounded at both the drive end and motor end over 360°.

In the second industrial environment (if an HV/LV transformer belongs to the user), the shielded motor power supply cable can be replaced with a 3-core + ground cable placed in a fully-enclosed metal conduit (metal cable duct for example). This metal conduit should be mechanically connected to the electrical cabinet and the structure supporting the motor. **If the conduit consists of several pieces, these should be interconnected by braids to ensure ground continuity.** The cables must be fixed securely at the bottom of the conduit.

**The motor earth terminal (PE) must be connected directly to the drive earth terminal.** A separate protective earth (PE) conductor is mandatory if the conductivity of the cable shielding is less than 50% of the conductivity of the phase conductor.

## Installation options

### Typical motor-drive unit installation

The following information is given for guidance only, and should never be used as a substitute for the current standards, nor does it relieve the installation company of their responsibility. Depending on the installation, more optional elements can be added:

**Switch-fuse:** a padlockable breaking device must be installed to isolate the installation if operator intervention becomes necessary. This device must provide protection against overheating and short-circuits. The fuse rating is stated in the drive documentation. The switch-fuse can be replaced with a circuit-breaker (with appropriate breaking capacity).

**RFI filter:** Its role is to reduce the drive electromagnetic emissions, and thus comply with EMC standards. Our drives are, as standard, equipped with an internal RFI filter. Some environments require the addition of an external filter. Please consult the drive documentation to find out the drive conformance levels, with and without an external RFI filter.

**Drive power supply cables:** These cables do not necessarily need shielding. Their cross-section is recommended in the drive documentation, however, it can be adapted according to the type of cable, installation method, the cable length (voltage drop), etc. See below “Sizing the power cables”.

**Line reactor:** Its role is to reduce the risk of damage to drives following phase imbalance or significant disturbance on the AC supply. The line reactor can also reduce low-frequency harmonics.

**Motor power supply cables:** These cables must be shielded to ensure EMC conformance of the installation. The cable shielding must be connected over 360° at both ends. At the motor end, special EMC cable glands are available as an option. The cable cross-section is recommended in the drive documentation, however, it can be adapted according to the type of cable, installation method, the cable length (voltage drop), etc. See below “Sizing the power cables”.

**Encoder cables:** The encoder cable shielding is important due to interference with the power cables. This cable must be laid at least 12 inches away from any power cables. See “Encoders” section.


**Sizing the power cables:** The drive and motor power supply cables must be sized according to the applicable standard, and according to the design current stated in the drive documentation.

The different factors to be taken into account are:

- The installation method: in a conduit, a cable tray, suspended, etc.
- The type of conductor: copper or aluminum


Once the cable cross-section has been determined, check the voltage drop at the motor terminals. A significant voltage drop results in increased current and additional losses in the motor (temperature rise).

**Equipotential bonding between the frame, motor, drive, transformer and ground carried out in accordance with good practice will significantly help reduce the voltage on the shaft and the motor casing, resulting in fewer high-frequency leakage currents. Premature failure of bearings and auxiliary equipment, such as encoders, should also be avoided wherever possible.**

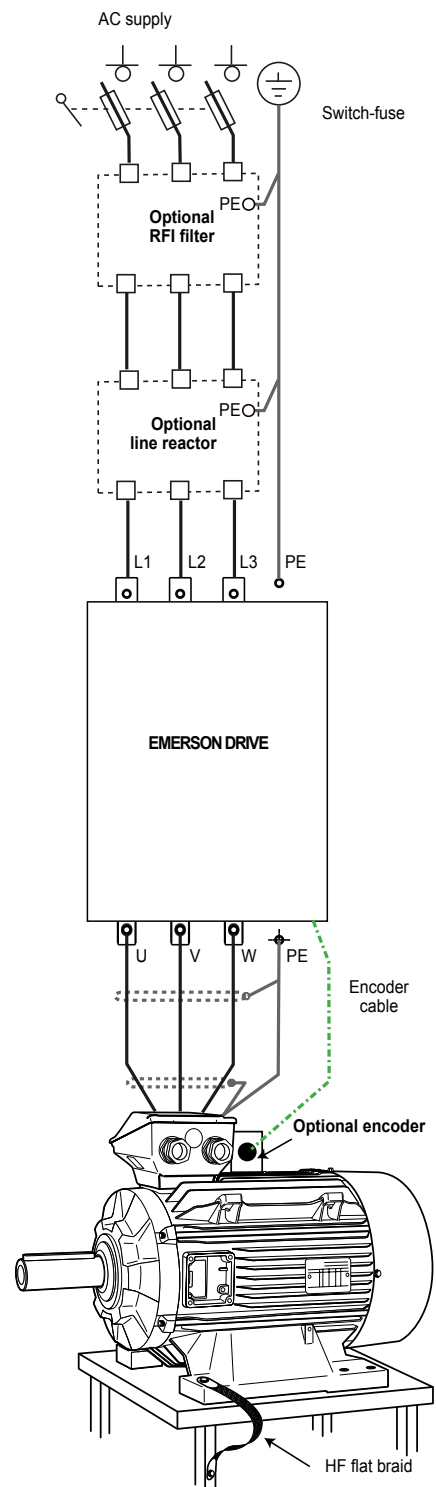

## Installation options

### Selection of feedback encoder

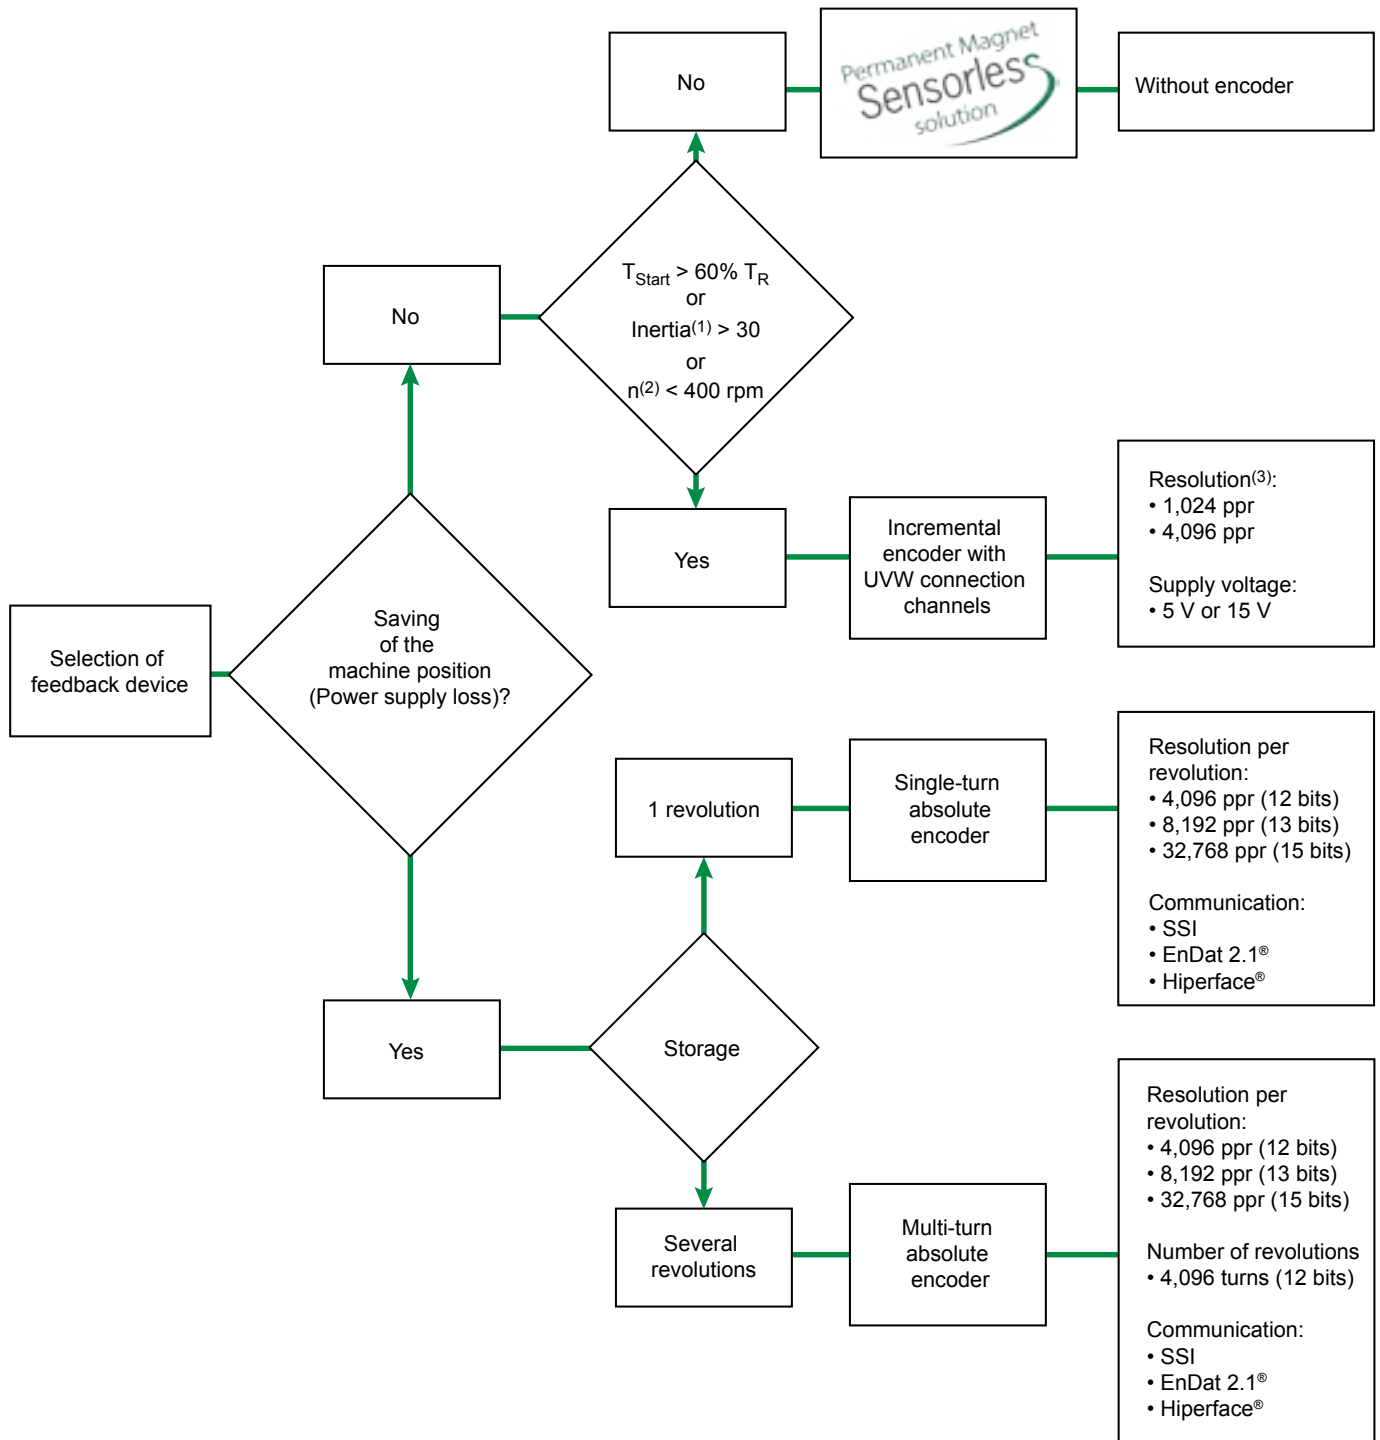

(1) Ratio between the driven load inertia related to the motor speed and the motor inertia

(2) Minimum speed

(3) Caution, if the speed is greater than or equal to 3000 rpm, the resolution must not exceed 1,024 ppr.

## Installation options

### Encoders

#### SENSORLESS mode

Drives in the Unidrive M600/700 range enable operation in sensorless mode (without encoder) in the majority of applications. The Unidrive M600 is specially dedicated to this type of motor control. In this operating mode, the rotor position feedback is calculated using the electrical measurements taken by the drive.

**When using permanent magnet synchronous machines in sensorless mode, ensure that:**

- The starting torque is < 60% than  $T_{rated}$
- The ratio between the load inertia and the motor inertia is < 30
- The machine's minimum speed is > 400 rpm

#### UVW incremental encoders

This pulse generator supplies a number of pulses on channels A/A/, B/B/, 0 marker, 0/ marker proportional to the speed. The information on commutation channels UVW enables the position of

the rotor to be known to within about 60° (electrical degrees).

A 1,024 ppr encoder is sufficient for most applications. However, where stability at very low speed (<10 rpm) is required, use of a higher-resolution encoder is recommended. For motors with frame sizes 200 and above, the encoder is galvanically isolated as standard in relation to the motor shaft.

#### Absolute encoders

Absolute encoders save the position in the revolution, or over several revolutions, in the event of a power loss. A reference point is no longer necessary. Data is transmitted via different communication protocols (EnDat, Hiperface, SSI, etc.). In certain cases, SinCos or incremental data is also available.

#### Single-turn absolute encoders

The single-turn absolute encoder converts the rotation of the drive shaft into a series of "encoded electrical steps". The number of steps per revolution is determined by an optical disk. In general, one shaft rotation consists of 8,192 steps, corresponding to 13 bits. At the end of a complete encoder shaft revolution, the same values are repeated.

#### Multi-turn absolute encoders

The multi-turn absolute encoder saves the position within a revolution and also over several revolutions, with a maximum of 4,096 revolutions.

#### Encoder - drive connecting cables

For each encoder type, order the appropriate cable from Emerson, guaranteeing optimum performance of the drive connection.

#### Encoder characteristics

| Encoder type                                  | UVW INCREMENTAL ENCODERS |                | ABSOLUTE ENCODERS   |                     |                     |                      |                     |                     |                     |                      |
|---|--------------------------|----------------|---------------------|---------------------|---------------------|----------------------|---------------------|---------------------|---------------------|----------------------|
|   |                          |                | Single-turn         |                     |                     |                      | Multi-turn (4,096)  |                     |                     |                      |
|   |                          |                | EnDat 2.1®          | SSI                 |                     | SinCos Hiperface®    | EnDat 2.1®          | SSI                 |                     | SinCos Hiperface®    |
| Encoder reference                             | KHO5                     | KHK5S (2)      | ECN 413             | ECN 413             | AFS 60              | SFS60                | EQN 425             | EQN 425             | AFM 60              | SFM 60               |
| Supply voltage                                | 5/30 VDC                 | 5/30 VDC       | 3.6/14 VDC          | 10/30 VDC           | 4.5/32 VDC          | 7/12 VDC             | 3.6/14 VDC          | 10/30 VDC           | 4.5/32 VDC          | 7/12 VDC             |
| Positions per revolution                      | 1,024 or 4,096           | 1,024 or 4,096 | 4,096<br>max: 8,192 | 4,096<br>max: 8,192 | 4,096<br>max: 8,192 | 4,096<br>max: 32,768 | 4,096<br>max: 8,192 | 4,096<br>max: 8,192 | 4,096<br>max: 8,192 | 4,096<br>max: 32,768 |
| Output stage                                  | TTL (RS422)              | TTL (RS422)    | 1 V ~               | 1 V ~               | 1 V ~               | 1 V ~                | 1 V ~               | 1 V ~               | 1 V ~               | 1 V ~                |
| Max. current (no load)                        | 140 mA                   | 140 mA         | 110 mA              | 45 mA               | 30 mA               | 80 mA                | 140 mA              | 55 mA               | 30 mA               | 80 mA                |
| Max. mechanical speed in continuous operation | 6,000 rpm                | 6,000 rpm      | 12,000 rpm          |                     | 9,000 rpm           | 6,000 rpm            | 12,000 rpm          |                     | 9,000 rpm           | 6,000 rpm            |
| Shaft diameter                                | 14 mm (1)                | 14 mm (1)      | 14 mm (1)           |                     | 14 mm (1)           | 14 mm (1)            | 14 mm (1)           |                     | 14 mm (1)           | 14 mm (1)            |
| Protection                                    | IP65                     | IP67           | IP64                |                     | IP65                | IP65                 | IP64                |                     | IP65                | IP65                 |
| Operating temperature                         | -30° +80°C               | -30° +80°C     | -40° +100°C         |                     | -30° +100°C         | -30° +115°C          | -40° +100°C         |                     | -30° +100°C         | -30° +115°C          |
| Certification                                 | CE                       | CE             | CE, cURus, UL/CSA   |                     | CE, cURus           | CE, cURus            | CE, cURus, UL/CSA   |                     | CE, cURus           | CE, cURus            |
| Motor end finish                              | M23<br>17 pins           | M23<br>17 pins | M23<br>17 pins      | M23<br>17 pins      | M23<br>12 pins      | M23<br>12 pins       | M23<br>17 pins      | M23<br>17 pins      | M23<br>12 pins      | M23<br>12 pins       |
| Drive end finish                              | HD15                     | HD15           | HD15                | HD15                | HD15                | HD15                 | HD15                | HD15                | HD15                | HD15                 |

(1) THS: Through Hollow Shaft, closed Resolver: please consult Leroy-Somer

(2) Reinforced encoder, recommended for severe environments (dusty atmospheres).

— : standard encoder type



## Installation options

### Reinforced insulation

Standard motors are compatible with power supplies with the following characteristics:

- V rms = 480 V max.
- Value of voltage peaks generated at the terminals: 1500 V max.

However, they can be supplied under more severe conditions if additional protection is provided.

### Reinforced winding insulation

The main effect associated with supplying power via an electronic drive is overheating of the motor due to the non-sinusoidal shape of the waveform. In addition, this can result in accelerated aging of the winding through the voltage peaks generated at each pulse in the power supply waveform (see Figure 1).



For peak values greater than 1500 V, a super-insulation option for the winding is available over the entire range.

### Insulated bearings

Supplying power via a drive can affect the mechanism and lead to premature wear of the bearings.

This is because, in any motor, a shaft voltage exists with respect to earth. This voltage, due to electromechanical asymmetries, creates a potential difference between the rotor and the stator. This effect can generate electrical discharges between balls and race and lead to a reduction in bearing life.

If power is supplied via a PWM drive, a second effect is added: high-frequency currents generated by the IGBT output bridges of the drives. These currents “attempt” to spread towards the drive and therefore flow through the stator and via earth where the link between the casing, machine frame and earth is correctly made.

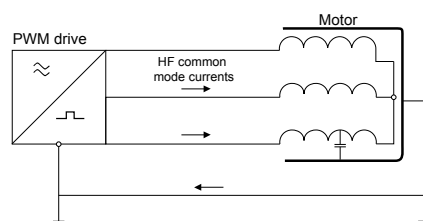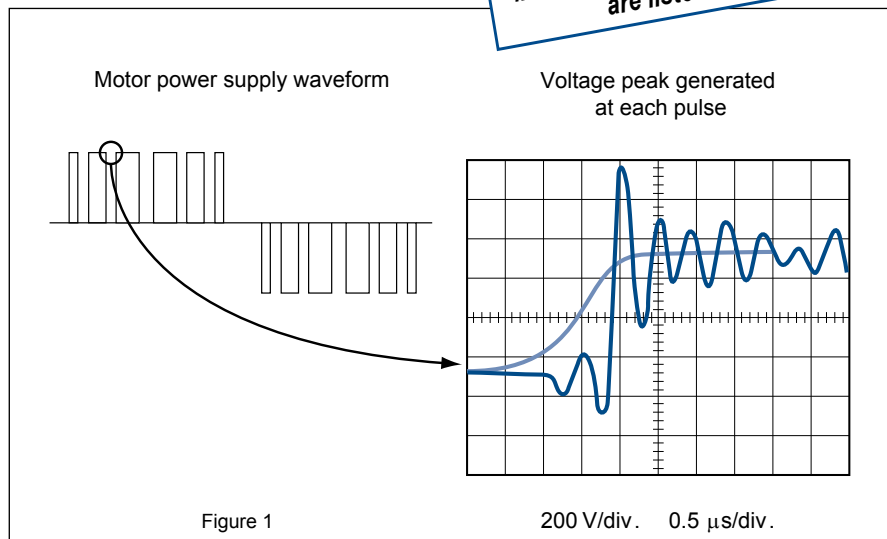

Otherwise, it will flow via the least resistive path: end shields/bearings/shaft/machine coupled to the motor. In these situations, therefore, protection for the bearings must be provided.

For this reason, an “insulated bearing” option is available over the entire range from a frame size of 200.

### Insulated bearing characteristics

The outer races of the bearings are coated with a layer of electrically insulating ceramic or the bearings incorporate ceramic balls.

The dimensions and tolerances of these bearings are identical to the standard ones used and can therefore be fitted instead, with no modifications to the motors. The breakdown voltage is 500 V. To find out which type of bearings are fitted as standard, see the “Bearings and lubrication” section.

Aegis Ring at DE side†

### Recommended winding protection

| AC voltage          | Cable length       | Frame size      | Winding protection    |
|---------------------|--------------------|-----------------|-----------------------|
| ≤ 480 V             | ≤ 20 m             | All frame sizes | Standard*             |
|                     | > 20 m and < 100 m | < 315           | Standard*             |
|                     |                    | ≥ 315           | RIS or drive filter** |
| > 480 V and ≤ 690 V | ≤ 20 m             | < 250           | Standard*             |
|                     |                    | ≥ 250           | RIS or drive filter** |
|                     | > 20 m and < 100 m | < 250           | RIS or drive filter** |
|                     |                    | ≥ 250           | RIS or drive filter** |

\* Standard insulation = 1,500 V peak and 3,500 V/μs

\*\* RIS: Reinforced insulation system. Do not use a drive filter in Sensorless mode.

† Aegis groundings rings are also fitted at the DE of certain motors to further protect the motor bearings.

## Installation options

### Forced ventilation units (TEFV) or (TEPV)

To maintain the rated torque over the entire speed range, a forced ventilation unit may be required.

#### Characteristics of forced ventilation units

(please consult Leroy-Somer for motors  $\geq 225$  SG in speed ranges  $\geq 2,400$  rpm)

| Motor type   | Supply voltage <sup>1</sup><br>FV                 | FV consumption |              |                        | Ingress protection <sup>2</sup><br>FV |
|--|---|----------------|--------------|------------------------|---------------------------------------|
|  |   | P<br>(W)       | P<br>(HP)    | I<br>(A)               |                                       |
| LSRPM 90 to 132  | single-phase<br>230 or 400 V                      | 100            | 0.13         | 0.43/0.25              | IP 55                                 |
| LSRPM 160  | three-phase<br>230/400 V 50 Hz<br>265/460 V 60 Hz | 48<br>57       | 0.06<br>0.07 | 0.25/0.14<br>0.22/0.13 | IP 55                                 |
| LSRPM 250 MY<br>LSRPM 200 to 225<br>except LSRPM 225 SG                            | three-phase<br>230/400 V 50 Hz<br>254/460 V 60 Hz | 150            | 0.2          | 0.94/0.55              | IP 55                                 |
| LSRPM 225 SG<br>LSRPM 315 SN<br>LSRPM 250 and 280<br>except LSRPM 280<br>MK/250 MY | three-phase<br>230/400 V 50 Hz<br>254/460 V 60 Hz | 200            | 0.27         | 1.4/0.8                | IP55                                  |
| LSRPM 280 MK1<br>LSRPM 315<br>except LSRPM 315 SN                                  | three-phase<br>230/400 V 50 Hz<br>254/460 V 60 Hz | 750            | 1.0          | 3.6/2.1                | IP55                                  |

The motors are self-cooled as standard

1.  $\pm 10\%$  for voltage,  $\pm 2\%$  for frequency.

2. Ingress protection of the forced ventilation unit installed on the motor.

## Cable glands

To guarantee protection of the installation in accordance with EMC directive 2004/108/EC, there must be ground continuity between the cable

and the motor ground. An optional **cable gland that clamps on to shielded cable** is therefore available over the entire range.

The motors are supplied with pre-drilled and tapped terminal boxes or an undrilled mounting plate for mounting cable glands see page 42

#### Type and cable size of cable glands

| Cable gland type | Cable size             |                        |
|------------------|------------------------|------------------------|
|                  | Min. cable Ø (mm)<br>W | Max. cable Ø (mm)<br>A |
| ISO 16           | 6                      | 11                     |
| ISO 20           | 7.5                    | 13                     |
| ISO 25           | 12.5                   | 18                     |
| ISO 32           | 17.5                   | 25                     |
| ISO 40           | 24.5                   | 33.5                   |
| ISO 50           | 33                     | 43                     |
| ISO 63           | 42.5                   | 55                     |

## Installation options

### Thermal protection

**The motors are fitted with PTC sensors as standard**

Motors are protected by the variable speed drive, placed between the isolating switch and the motor. The drive provides total protection of the motor against overloads.

Dyneo motors are fitted with PTC sensors in the winding as standard. As an option, specific thermal protection sensors can be selected from the table below.

**It must be emphasized that under no circumstances can these sensors be used for direct regulation of the motor operating cycles.**

#### Fitting thermal protection










- PTO or PTF, in the control circuits
- PTC, with relay, in the control circuits
- PT 100 or thermocouples, with reading equipment or recorder, in the installation control panels for continuous surveillance

**Motor thermal sensors must be connected in order to maintain optimum motor protection.**

#### Alarm and early warning

All protective equipment can be backed up by another type of protection (with different NRTs). The first device will then act as an early warning (light or sound signals given without shutting down the power circuits), and the second device will be the alarm (shutting down the power circuits).

#### Built-in indirect thermal protection

| Type   | Operating principle   | Operating curve   | Breaking capacity (A)                  | Protection provided                                       | Mounting Number of devices*   |
|--|---|---|--|---|---|
| Normally closed thermal protection <b>PTO</b>  | Bimetallic strip, indirectly heated, with normally closed (NC) contact<br> |   | 2.5 A at 250 V with $\cos \varphi 0.4$ | General surveillance for non-transient overloads          | Mounted in control circuit<br>2 or 3 in series  |
| Normally open thermal protection <b>PTF</b>  | Bimetallic strip, indirectly heated, with normally open (NO) contact<br>   |  | 2.5 A at 250 V with $\cos \varphi 0.4$ | General surveillance for non-transient overloads          | Mounted in control circuit<br>2 or 3 in parallel  |
| Thermistor with positive temperature coefficient <b>PTC</b>  | Non-linear variable resistor, indirectly heated<br>                        |  | 0                                      | General surveillance for transient overloads              | Mounted with associated relay in control circuit<br>3 in series                             |
| Thermal sensor <b>KTY</b>  | Resistance depends on the winding temperature   |  | 0                                      | High accuracy continuous surveillance of key hot spots    | Mounted in control panels with associated reading equipment (or recorder)<br>1 per hot spot |
| Thermocouples<br>$T$ ( $T < 150^\circ\text{C}$ )<br>Copper Constantan<br>$K$ ( $T < 1000^\circ\text{C}$ )<br>Copper-nickel | Peltier effect  |  | 0                                      | Continuous surveillance of hot spots at regular intervals | Mounted in control panels with associated reading equipment (or recorder)<br>1 per hot spot |
| Platinum resistance thermometer <b>PT 100</b>  | Linear variable resistor, indirectly heated   |  | 0                                      | High accuracy continuous surveillance of key hot spots    | Mounted in control panels with associated reading equipment (or recorder)<br>1 per hot spot |

- NRT: nominal running temperature

- The NRTs are chosen according to the position of the sensor in the motor and the temperature rise class.

- Standard KTY = 84/130


























\* The number of devices relates to the winding protection.

## Motor construction

### Definition of “Index of Protection” (IP/IK)

Ingress protection of electrical equipment enclosures  
In accordance with IEC 60034-5 - EN 60034-5 (IP) - IEC 62262 (IK)

In standard configuration the motors are  
IP 55/IK 08 for LSRPM

| 1st number:<br>Protection against solid objects  |   |   | 2nd number:<br>Protection against liquids |   |  | 3rd number:<br>Mechanical protection |   |                       |
|--|---|---|---|---|--|--------------------------------------|---|-----------------------|
| IP   | Tests   | Definition  | IP  | Tests   | Definition   | IK                                   | Tests   | Definition            |
| 0  |   | No protection   | 0   |   | No protection  | 00                                   |   | No protection         |
| 1  |    | Protected against solid objects larger than 50 mm (e.g. accidental contact with the hand) | 1   |    | Protected against water drops falling vertically (condensation)      | 01                                   |    | Impact energy: 0.15 J |
| 2  |    | Protected against solid objects larger than 12 mm (e.g. a finger)                         | 2   |    | Protected against water drops falling at up to 15° from the vertical | 02                                   |    | Impact energy: 0.20 J |
| 3  |    | Protected against solid objects larger than 2.5 mm (e.g. tools, wires)                    | 3   |    | Protected against rain falling at up to 60° from the vertical        | 03                                   |    | Impact energy: 0.37 J |
| 4  |   | Protected against solid objects larger than 1 mm (e.g. thin tools, small wires)           | 4   |   | Protected against projected water from all directions                | 04                                   |   | Impact energy: 0.50 J |
| 5  |  | Protected against dust (no deposits of harmful material)                                  | 5   |  | Protected against jets of water from all directions from a hose      | 05                                   |  | Impact energy: 0.70 J |
| 6  |  | Protected against any dust penetration  | 6   |  | Protected against projected water comparable to big waves            | 06                                   |  | Impact energy: 1 J    |
| <b>Example:</b><br> Example of an IP55 machine |   |   | 7   |  | Protected against the effects of immersion between 0.15 and 1 m      | 07                                   |  | Impact energy: 2 J    |
|  |   |   | 8   |  | Protected against prolonged effects of immersion under pressure      | 08                                   |  | Impact energy: 5 J    |
|  |   |   |   |   |  | 09                                   |  | Impact energy: 10 J   |
|  |   |   |   |   |  | 10                                   |  | Impact energy: 20 J   |

Example:

Example of an IP55 machine

IP : Index of protection

5. : Machine protected against dust and accidental contact.  
Test result: no dust enters in harmful quantities, no risk of direct contact with rotating parts. The test will last for 2 hours.
- .5 : Machine protected against jets of water from all directions from hoses at 3 m distance with a flow rate of 12.5 l/min at 0.3 bar.  
The test will last for 3 minutes.  
Test result: no damage from water projected onto the machine.

## Motor construction

### External finish

Surface protection is defined in standard ISO 12944. This standard defines the expected life of a paint system until the first major application of maintenance paint.

Standard EN ISO 12944 is divided into 8 parts. Part 2 discusses the classification of environments.

Leroy-Somer motors are protected with a range of surface finishes.

Surfaces receive appropriate special treatments, as shown below.

#### Preparation of surfaces

| SURFACE        | PARTS                       | TREATMENT                              |
|----------------|-----------------------------|--|
| Cast iron      | End shields                 | Shot blasting + Primer                 |
| Steel          | Accessories                 | Phosphate treatment + Primer           |
|                | Terminal boxes - Fan covers | Electrostatic painting or Epoxy powder |
| Aluminum alloy | Housings - Terminal boxes   | Shot blasting                          |

#### Classification of environments

Leroy-Somer paint systems according to category.

| ATMOSPHERIC<br>CORROSIVITY<br>CATEGORIES | CORROSIVITY<br>CATEGORY* ACC.<br>TO ISO 12944-2 | Durability class | ISO 6270                              | ISO 9227                               | Leroy-Somer<br>system equivalent |
|--|---|------------------|---------------------------------------|--|----------------------------------|
|  |   |                  | Water condensation<br>Number of hours | Neutral saline mist<br>Number of hours |                                  |
| Average                                  | C3  | Limited          | 48                                    | 120                                    | Ia                               |
|  |   | Average          | 120                                   | 240                                    | IIa                              |
|  |   | High             | 240                                   | 480                                    | IIb                              |
| High                                     | C4  | Limited          | 120                                   | 240                                    | -                                |
|  |   | Average          | 240                                   | 480                                    | IIIa                             |
|  |   | High             | 480                                   | 720                                    | IIIb**                           |
| Very high<br>(Industry)                  | C5-I  | Limited          | 240                                   | 480                                    | IVb**                            |
|  |   | Average          | 480                                   | 720                                    | Ve**                             |
|  |   | High             | 720                                   | 1440                                   | -                                |
| Very high<br>(Marine)                    | C5-M  | Limited          | 240                                   | 480                                    | -                                |
|  |   | Average          | 480                                   | 720                                    | -                                |
|  |   | High             | 720                                   | 1440                                   | 161b**                           |

Standard for LSRPM aluminum and PLSRPM steel motors

\* Values given for information only since the substrates vary in nature whereas the standard only takes account of steel substrates.

\*\* Assessment of degree of rusting in accordance with standard ISO 4628 (rust over 1 to 0.5% of the surface).

Standard paint color reference of LSRPM-PLSRPM motors:

**RAL 3005**

## Motor construction


## Mounting arrangements

### Mountings and positions (IEC standard 60034-7)

#### Foot mounted motors

- all frame sizes


IM 1001 (IM B3)  
- Horizontal shaft  
- Feet on floor




IM 1071 (IM B8)  
- Horizontal shaft  
- Feet on top



IM 1051 (IM B6)  
- Horizontal shaft  
- Wall mounted with feet on left  
when viewed from drive end




IM 1011 (IM V5)  
- Vertical shaft facing down  
- Feet on wall



IM 1061 (IM B7)  
- Horizontal shaft  
- Wall mounted with feet on right  
when viewed from drive end




IM 1031 (IM V6)  
- Vertical shaft facing up  
- Feet on wall




#### (FF) flange mounted motors

- all frame sizes  
(except IM 3001, which is limited to  
frame size 225 mm)


IM 3001 (IM B5)  
- Horizontal shaft




IM 2001 (IM B35)  
- Horizontal shaft  
- Feet on floor




IM 3011 (IM V1)  
- Vertical shaft facing down




IM 2011 (IM V15)  
- Vertical shaft facing down  
- Feet on wall



IM 3031 (IM V3)  
- Vertical shaft facing up




IM 2031 (IM V36)  
- Vertical shaft facing up  
- Feet on wall




#### (FT) face mounted motors

- all frame sizes ≤ 132 mm

IM 3601 (IM B14)  
- Horizontal shaft




IM 2101 (IM B34)  
- Horizontal shaft  
- Feet on floor




IM 3611 (IM V18)  
- Vertical shaft facing down




IM 2111 (IM V58)  
- Vertical shaft facing down  
- Feet on wall



IM 3631 (IM V19)  
- Vertical shaft facing up




IM 2131 (IM V69)  
- Vertical shaft facing up  
- Feet on wall



#### Motors without drive end shield

Caution: The protection (IP) specified on the IM B9 and IM B15 motor nameplates is provided by the customer when the motor is assembled

IM 9101 (IM B9)  
- Threaded tie rods  
- Horizontal shaft



IM 1201 (IM B15)  
- Foot mounted with threaded  
tie rods  
- Horizontal shaft



| Frame size<br>(mm) | Mounting positions |         |         |         |         |         |         |         |         |         |         |         |
|--------------------|--------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                    | IM 1001            | IM 1051 | IM 1061 | IM 1071 | IM 1011 | IM 1031 | IM 3001 | IM 3011 | IM 3031 | IM 2001 | IM 2011 | IM 2031 |
| ≤ 200              | ●                  | ●       | ●       | ●       | ●       | ●       | ●       | ●       | ●       | ●       | ●       | ●       |
| 225 and 250        | ●                  | ●       | ●       | ●       | ●       | ●       | ■       | ●       | ●       | ●       | ●       | ●       |
| ≥ 280              | ●                  | ■       | ■       | ■       | ■       | ■       | ■       | ●       | ●       | ●       | ●       | ■       |

● : possible positions

■ : please consult Leroy-Somer specifying the coupling method and the axial and radial loads if applicable

## Motor construction

### Bearings and lubrication

#### Type of grease

When the bearings are not greased for life, the type of grease is indicated on the nameplate.

**Avoid mixing greases and adhere to the quantities stated**

#### Permanently greased bearings

Under normal operating conditions, the service life (L10h) of the lubricant is 25,000 hours for a machine installed horizontally and for temperatures less than 77 °F.

#### Bearings with grease nipples

**The bearings are lubricated in the factory**

The end shields are fitted with bearings lubricated by Técalémit grease nipples.

**The frequency of lubrication and the quantity and quality of grease are given on the nameplates. Refer to these to ensure correct bearing lubrication.**

**Even in the event of prolonged storage or downtime, the interval between two greasing operations must never exceed 2 years.**

#### Permissible loads

**Permissible loads:** Motors in the 1800 series are designed to operate with direct or indirect coupling: permissible loads on request.

Motors in the 3600 series are designed to operate with direct coupling. For other cases, please consult Leroy-Somer.

**CAUTION:** Transmission via belt pulleys is only authorized up to series 1800.

#### Precautions

For the 3600 series, a running-in period is necessary. Please refer to installation and maintenance manual reference 4155.

#### Bearings fitted as standard

| Voltage | Speed (rpm)     | Power (kW)    | NDE bearing             | DE bearing              |
|---------|-----------------|---------------|-------------------------|-------------------------|
| < 460 V | 1500 ≤ N ≤ 2400 | < 160         | Standard                | Standard                |
|         |                 | ≥ 160         | Insulated outer ring    |                         |
|         | 2400 < N ≤ 3600 | < 145         | Standard                | Standard                |
|         |                 | 145 ≤ P < 325 | Insulated outer ring    |                         |
|         |                 | ≥ 325         |                         | Insulated outer ring    |
|         | 3600 < N ≤ 4500 | < 55          | Standard                | Standard                |
|         |                 | ≥ 55          | Insulated outer ring    | Insulated outer ring    |
|         | N > 4500        | < 55          | Standard                | Standard                |
|         |                 | ≥ 55          | Insulated ceramic balls | Insulated ceramic balls |
| ≥ 460 V | ≥ 1500          | < 55          | Standard                | Standard                |
|         |                 | ≥ 55          | Insulated ceramic balls | Standard + ground ring  |

#### Greasing (standard)

| Frame size | Speed (rpm) | Lubrication type             | Grease              |
|------------|-------------|------------------------------|---------------------|
| < 225      | All         | Permanently greased bearings | ENS, WT or BQ 72-72 |
| ≥ 225      | N ≤ 3600    | Bearings with grease nipples | Polyrex EM 103      |
|            | N > 3600    | Bearings with grease nipples | BQ 72-72            |

## Motor construction


### Connection

#### Terminal box


Placed as standard on the top of the motor near the drive end, the terminal box has IP55 protection.

The standard position of the cable gland baseplate is on the right, seen from the drive end, position A1.

▼ Terminal box positions in relation to the drive end



▼ Cable gland positions in relation to the drive end



Only positions 1 and 3 are possible

#### Dimensions of motor connection terminals

##### Motors with frame size ≤ 160

| Frame size  | Speed (rpm) | Terminals |
|-------------|-------------|-----------|
| 90          | all         | M5        |
| 100 and 132 | all         | M6        |
| 160         | N ≤ 2400    | M6        |
|             | N > 2400    | M8        |

##### Motors with frame size ≥ 200

| Motor current (A) | Terminals |
|-------------------|-----------|
| ≤ 63              | M6        |
| 63 < I ≤ 125      | M10       |
| 200 < I ≤ 320     | M12       |
| I > 320           | M16       |

#### Terminal box drilling for cable glands

| Motor type                      | Power + auxiliaries   |   |
|---------------------------------|-----------------------|---|
|                                 | Number of drill holes | Drill hole diameter   |
| LSRPM 90 SL                     | 2                     | ISO M25x1.5 + 1xM16   |
| LSRPM 100 L                     |                       |   |
| LSRPM 132 M                     |                       | ISO M40x1.5 + 1xM16   |
| LSRPM 160 LR/MP                 |                       | ISO M50x1.5 + 1xM16<br>for speed ≤ 2,400 rpm: ISO M40x1.5 + 1xM16 |
| LSRPM 200 L/LU                  | 3                     | 2xM40 + 1xM16   |
| LSRPM 200 L1                    |                       | 2xM50 + 1xM16   |
| LSRPM 200 L2/LU2                |                       | 2xM63 + 1xM16   |
| LSRPM 225 ST1/MR1, LSRPM 250 MY |                       | 2xM50 + 1xM16   |
| LSRPM 225 SG/ST2/SR2            |                       | 2xM63 + 1xM16   |
| LSRPM 250 SE/ME                 |                       | 2xM63 + 1xM16   |
| LSRPM 250 SE1/ME1               |                       | Removable undrilled mounting plate                                |
| LSRPM 280 SD/SC/SCM             |                       | 2xM63 + 1xM16   |
| LSRPM 280 SD1/MK1               | 0                     | Removable undrilled mounting plate                                |
| LSRPM 315 SP1/MR1/SN/MP1/SR1    |                       |   |



## Motor construction

## Motor vibration levels

Maximum vibration magnitude limits (rms values) in terms of displacement, speed and acceleration for a frame size H (IEC 60034-14)

The machines in this catalog are in vibration class:  
- level A as standard  
- level B as option for  $n \leq 3600$  rpm  
and half-key balancing (H)

| Vibration level | Frame size H (mm)  |               |                                  |                    |               |                                  |                    |               |                                  |
|-----------------|--------------------|---------------|----------------------------------|--------------------|---------------|----------------------------------|--------------------|---------------|----------------------------------|
|                 | 90 < H ≤ 132       |               |                                  | 132 < H ≤ 280      |               |                                  | H > 280            |               |                                  |
|                 | Displacement<br>μm | Speed<br>mm/s | Acceleration<br>m/s <sup>2</sup> | Displacement<br>μm | Speed<br>mm/s | Acceleration<br>m/s <sup>2</sup> | Displacement<br>μm | Speed<br>mm/s | Acceleration<br>m/s <sup>2</sup> |
| A               | 25                 | 1.6           | 2.5                              | 35                 | 2.2           | 3.5                              | 45                 | 2.8           | 4.4                              |
| B               | 11                 | 0.7           | 1.1                              | 18                 | 1.1           | 1.7                              | 29                 | 1.8           | 2.8                              |

Dyneo motors are balanced with a half-key in accordance with standard ISO 8821. Any coupling element (pulley, coupling sleeve, slip-ring, etc.) must therefore be balanced accordingly.

## General information

### Quality commitment

Leroy-Somer's quality management system is based on:

- Control of procedures right from the initial sales offering until delivery to the customer, including design, manufacturing start-up and production
- A total quality policy based on making continuous progress in improving operational procedures, involving all departments in the company in order to give customer satisfaction as regards delivery times, conformity and cost

- Indicators used to monitor procedural performance

- Corrective actions and advancements with tools such as FMECA, QFD, MAVP, MSP/MSQ and Hoshin type improvement workshops on flows, process re-engineering, plus Lean Manufacturing and Lean Office

- Annual surveys, opinion polls and regular visits to customers in order to ascertain and detect their expectations.

Personnel are trained and take part in the analyses and the actions for continuously improving the procedures.

Leroy-Somer has entrusted the certification of its expertise to various international organizations.

Certification is granted by independent professional auditors, and recognizes the high standards of the **company's quality assurance procedures**. All activities resulting in the final version of the machine have therefore received official **ISO 9001: 2008 certification from the DNV**. Similarly, our environmental approach has enabled us to obtain ISO 14001: 2004 certification.

Products for particular applications or those designed to operate in specific environments are also approved or certified by the following organizations: LCIE, DNV, INERIS, EFECTIS, UL, BSRIA, TUV, GOST, which check their technical performance against the various standards or recommendations.



## ISO 9001 : 2008



## General information

## Standards and approvals

### List of standards quoted in this document

**Our motors comply with  
the standards quoted in this catalog**

| Reference                 |             | International standards  |
|---------------------------|-------------|--|
| IEC 60034-1               | EN 60034-1  | Rotating electrical machines: rating and performance.  |
| IEC 60034-2-1             |             | Rotating electrical machines: methods for determining losses and efficiency from tests (measured additional losses)  |
| IEC 60034-5               | EN 60034-5  | Rotating electrical machines: classification of degrees of protection provided by casings of rotating machines   |
| IEC 60034-6               | EN 60034-6  | Rotating electrical machines (except traction): methods of cooling   |
| IEC 60034-7               | EN 60034-7  | Rotating electrical machines (except traction): symbols for mounting positions and assembly layouts  |
| IEC 60034-8               |             | Rotating electrical machines: terminal markings and direction of rotation  |
| IEC 60034-9               | EN 60034-9  | Rotating electrical machines: noise limits   |
| IEC 60034-12              | EN 60034-12 | Starting performance of single-speed three-phase cage induction motors for supply voltages up to and including 660 V.  |
| IEC 60034-14              | EN 60034-14 | Rotating electrical machines: mechanical vibrations of certain machines with a frame size above or equal to 56 mm. Measurement, evaluation and limits of vibration severity                          |
| IEC 60034-17              |             | Cage induction motors when fed from converters - Application guide   |
| IEC 60034-30-1            |             | Rotating electrical machines: efficiency classes of single-speed, three-phase cage induction motors (Code IE)  |
| IEC 60038                 |             | IEC standard voltages.   |
| IEC 60072-1               |             | Dimensions and output powers for rotating electrical machines: designation of casings between 56 and 400 and flanges between 55 and 1080   |
| IEC 60085                 |             | Evaluation and thermal classification of electrical insulation.  |
| IEC 60721-2-1             |             | Classification of environmental conditions appearing in nature. Temperature and humidity   |
| IEC 60892                 |             | Effects of unbalanced voltages on the performance of 3-phase cage induction motors   |
| IEC 61000-2-10/11 and 2-2 |             | Electromagnetic compatibility (EMC): environment.  |
| IEC guide 106             |             | Guidelines on the specification of environmental conditions for the determination of operating characteristics of equipment  |
| ISO 281                   |             | Bearings - Dynamic load ratings and nominal bearing life   |
| ISO 1680                  | EN 21680    | Acoustics - Test code for the measurement of airborne noise emitted by rotating electrical machines: a method for establishing an expert opinion for free field conditions over a reflective surface |
| ISO 8821                  |             | Mechanical vibration - Balancing. Shaft and fitment key convention   |
|                           | EN 50102    | Degree of protection provided by electrical enclosures against extreme mechanical impacts  |
| ISO 12944-2               |             | Corrosion protection   |

## General information


### Standards and approvals

#### Approvals

Certain countries recommend or insist on approval from national organizations. Approved products must carry the recognized mark on their nameplates.

| Country | Acronym | Organization                   |
|---------|---------|--------------------------------|
| USA     | UL      | Underwriters Laboratories      |
| CANADA  | CSA     | Canadian Standards Association |
| etc.    |         |                                |

#### Approvals for Leroy-Somer motors (versions derived from standard construction):

| Country      | Acronym   | Certification No.              | Application  |
|--------------|---|--------------------------------|--|
| CANADA       | CSA   | LR 57 008                      | Standard adapted range (see "Supply voltage" section)  |
| USA          | UL or FU  | E 68554<br>SA 6704<br>E 206450 | Impregnation systems<br>Stator/rotor assemblies for sealed units<br>Complete motors up to 160 size |
| USA + Canada |  | E 68554                        | Impregnation systems   |
| SAUDI ARABIA | SASO  |                                | Standard range   |
| FRANCE       | LCIE<br>INERIS  | Various nos.                   | Sealing, shocks, safety  |

For specific approved products, see the relevant documents.

#### International and national standard equivalents

| International reference standards |  | National standards                       |  |                |             |                 |
|-----------------------------------|--|--|--|----------------|-------------|-----------------|
| IEC                               | Title (summary)  | FRANCE                                   | GERMANY  | UK             | ITALY       | SWITZERLAND     |
| 60034-1                           | Ratings and operating characteristics  | NFEN 60034-1<br>NFC 51-120<br>NFC 51-200 | DIN/VDE 0530   | BS 4999        | CEI 2.3.VI. | SEV ASE 3009    |
| 60034-5                           | Classification of degrees of protection  | NFEN 60034-5                             | DIN/EN 60034-5   | BS EN 60034-5  | UNEL B 1781 |                 |
| 60034-6                           | Methods of cooling   | NFEN 60034-6                             | DIN/EN 60034-6   | BS EN 60034-6  |             |                 |
| 60034-7                           | Mounting arrangements and assembly layouts   | NFEN 60034-7                             | DIN/EN 60034-7   | BS EN 60034-7  |             |                 |
| 60034-8                           | Terminal markings and direction of rotation  | NFC 51 118                               | DIN/VDE 0530<br>Teil 8   | BS 4999-108    |             |                 |
| 60034-9                           | Noise limits   | NFEN 60034-9                             | DIN/EN 60034-9   | BS EN 60034-9  |             |                 |
| 60034-12                          | Starting characteristics for single-speed motors for supply voltages ≤ 660 V                             | NFEN 60034-12                            | DIN/EN 60034-12  | BS EN 60034-12 |             | SEV ASE 3009-12 |
| 60034-14                          | Mechanical vibration in machines<br>frame size ≥ 56 mm   | NFEN 60034-14                            | DIN/EN 60034-14  | BS EN 60034-14 |             |                 |
| 60072-1                           | Dimensions and output powers for machines of between 56 and 400 frame and flanges of between 55 and 1080 | NFC 51 104<br>NFC 51 105                 | DIN 748 (~)<br>DIN 42672<br>DIN 42673<br>DIN 42631<br>DIN 42676<br>DIN 42677 | BS 4999        |             |                 |
| 60085                             | Evaluation and thermal classification of electrical insulation   | NFC 26206                                | DIN/EN 60085   | BS 2757        |             | SEV ASE 3584    |


Note: DIN 748 tolerances do not conform to IEC 60072-1.

## General information

### Nameplates

#### Identification

As soon as you receive the motor, check that the nameplate on the machine conforms to your order.

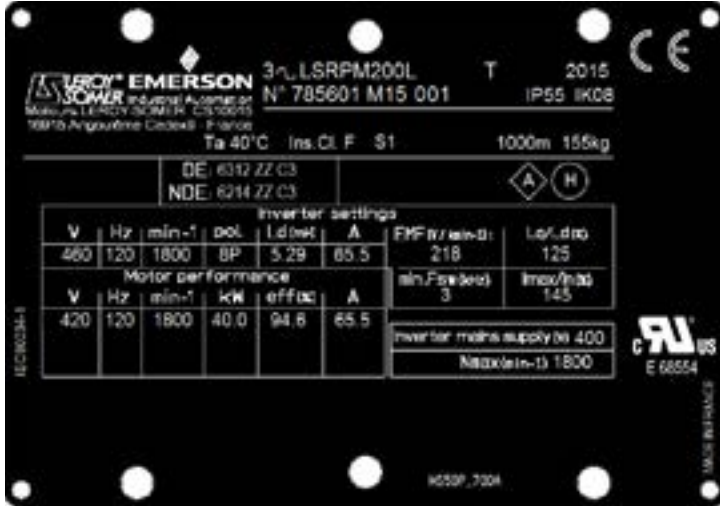

Definition of symbols used on nameplates:



Legal mark of conformity  
of product to the requirements  
of European Directives

**3 ~** : Three-phase AC motor  
**LSRPM** : Series  
**200** : Frame size  
**L** : Housing designation and  
manufacturer code  
**TC** : Impregnation index

**Motor**  
**785601** : Motor serial number  
**M** : Month of production  
**15** : Year of production  
**001** : Batch number  
**IP55 IK08** : Protection index  
**Ins. cl. F** : Insulation class F  
**Ta 40°C** : Ambient operating temperature  
**S** : Duty  
**%** : Operating factor  
**1000m** : Maximum altitude without derating  
**kg** : Weight

**RI** : Insulated bearing  
**DE** : Drive end bearing  
**NDE** : Non drive end bearing  
**12 g** : Amount of grease at each  
re-greasing  
**2200 h** : Re-greasing interval (in hours)  
for the ambient temperature (Ta)  
**QUIET BQ 72-72** : Type of grease



: Vibration level



: Balancing mode

**Inverter settings** : Parameters to be entered  
in the drive  
**EMF (V / kmin<sup>-1</sup>)** : Electromotive force  
**Lq/Ld %** : Cogging ratio  
**min.Fsw (kHz)** : Minimum switching  
frequency  
**Imax/In %** : Maximum current ratio/Rated  
current

**V** : Voltage  
**Hz** : Supply frequency  
**min<sup>-1</sup>** : Revolutions per minute (rpm)  
**pol.** : Number of poles  
**Ld (mH)** : Transient inductance  
**A** : Rated current

**Motor performance** : Motor characteristics

**V** : Voltage  
**Hz** : Supply frequency  
**min<sup>-1</sup>** : Revolutions per minute (rpm)  
**kW** : Rated power  
**Eff %** : Efficiency  
**A** : Rated current

**Inverter mains supply (V)** : Drive AC supply  
voltage  
**Nmax (min<sup>-1</sup>)** : Maximum speed (rpm)



**SCIGATE AUTOMATION (S) PTE LTD**

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

**Tel: (65) 6561 0488**

**Fax: (65) 6562 0588**

**Email: sales@scigate.com.sg**

**Web: www.scigate.com.sg**

**Business Hours: Monday - Friday 8.30am - 6.15pm**

**Control Techniques™**

**Leroy-Somer™**

[www.emersonindustrial.com/automation](http://www.emersonindustrial.com/automation)

**Connect with us at:**

[twitter.com/ctandls](https://twitter.com/ctandls)

[facebook.com/ctandls](https://facebook.com/ctandls)

[youtube.com/controltechniquesandleroyssomer](https://youtube.com/controltechniquesandleroyssomer)

[theautomationengineer.com](http://theautomationengineer.com) (blog)



© Emerson 2015. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Emerson have an ongoing process of development and reserve the right to change the specification of their products without notice.

Control Techniques Limited. Registered Office: The Gro, Newtown, Powys SY16 3BE. Registered in England and Wales. Company Reg. No. 01236886.

Moteurs Leroy-Somer SAS. Headquarters: Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France. Share Capital: 65 800 512 €, RCS Angoulême 338 567 258.