

Panel Cutout Adapter(CA4-ATM5-01) Installation Guide

Introduction

This product is a conversion kit for replacing the current display unit manufactured by Pro-face with a display unit that has smaller panel cutout dimensions.

Before	After
GP-37W2 series LT series	GP-3300 series ST-3300 series LT-3300 series

Packing List

Attachment x1
Gasket x1
M4 Hex nut x6 (two spares)
Exclusive installation fastener x4

Item	Specified Values
Protective Construction	Protection: Equivalent to IP65 (Front face of installed unit)
Weight	0.25 kg or less (Attachment only)
External Dimensions	(W)x(H)x(D) [mm] 207.0 x 157.0 x 17.0
Color	Silver metallic
Material	Steel plate

Installation Procedures

- Step 1. Confirm the Display unit (1), moisture resistant gaske (2) and the exclusive installation fasteners (5) are present.
- Step 2. Make sure that the moisture resistant gasket is fitted properly to the Display unit.
- Step 3. Install the gasket (4) to the attachment (3) correctly.
- Step 4. Attach the Display to the attachment prepared in Step 3 by using the exclusive installation fasteners. Tighten the fastener attachment screws. The proper torque for tightening a screw to obtain a sufficient level of splash-proof is 0.5 N•m.



Do not over-tighten the fastener attachment screws or Display may be damaged.

- Step 5. Insert the attachment prepared in Step 4 into the cutout section of the GP37W2 operation panel by matching the threaded portion of the plate with the four corners of the panel.
- Step 6. Confirm the gasket is installed correctly.
- Step 7. Tighten the M4 hex nuts (6) evenly. The proper torque for tightening a nut to obtain a sufficient level of splash-proof is 0.5 N•m.



Do not over-tighten the hex nuts or the attachment may be damaged.

Disclaimer

We assume no responsibility for any losses, damages or any claims from third party resulting from the use of this product.

Head Office


Digital Electronics Corporation

8-2-52 Nanko-higashi
Suminoe-ku, Osaka 559-0031 JAPAN
Tel: +81-(0)6-6613-1101
Fax: +81-(0)6-6613-5888
URL: <http://www.proface.co.jp/>

When the product is disposed of, it should be done so according to your country's regulations for similar types of industrial waste.

© Copyright 2004 Digital Electronics Corporation. All rights reserved.

Completed Chart

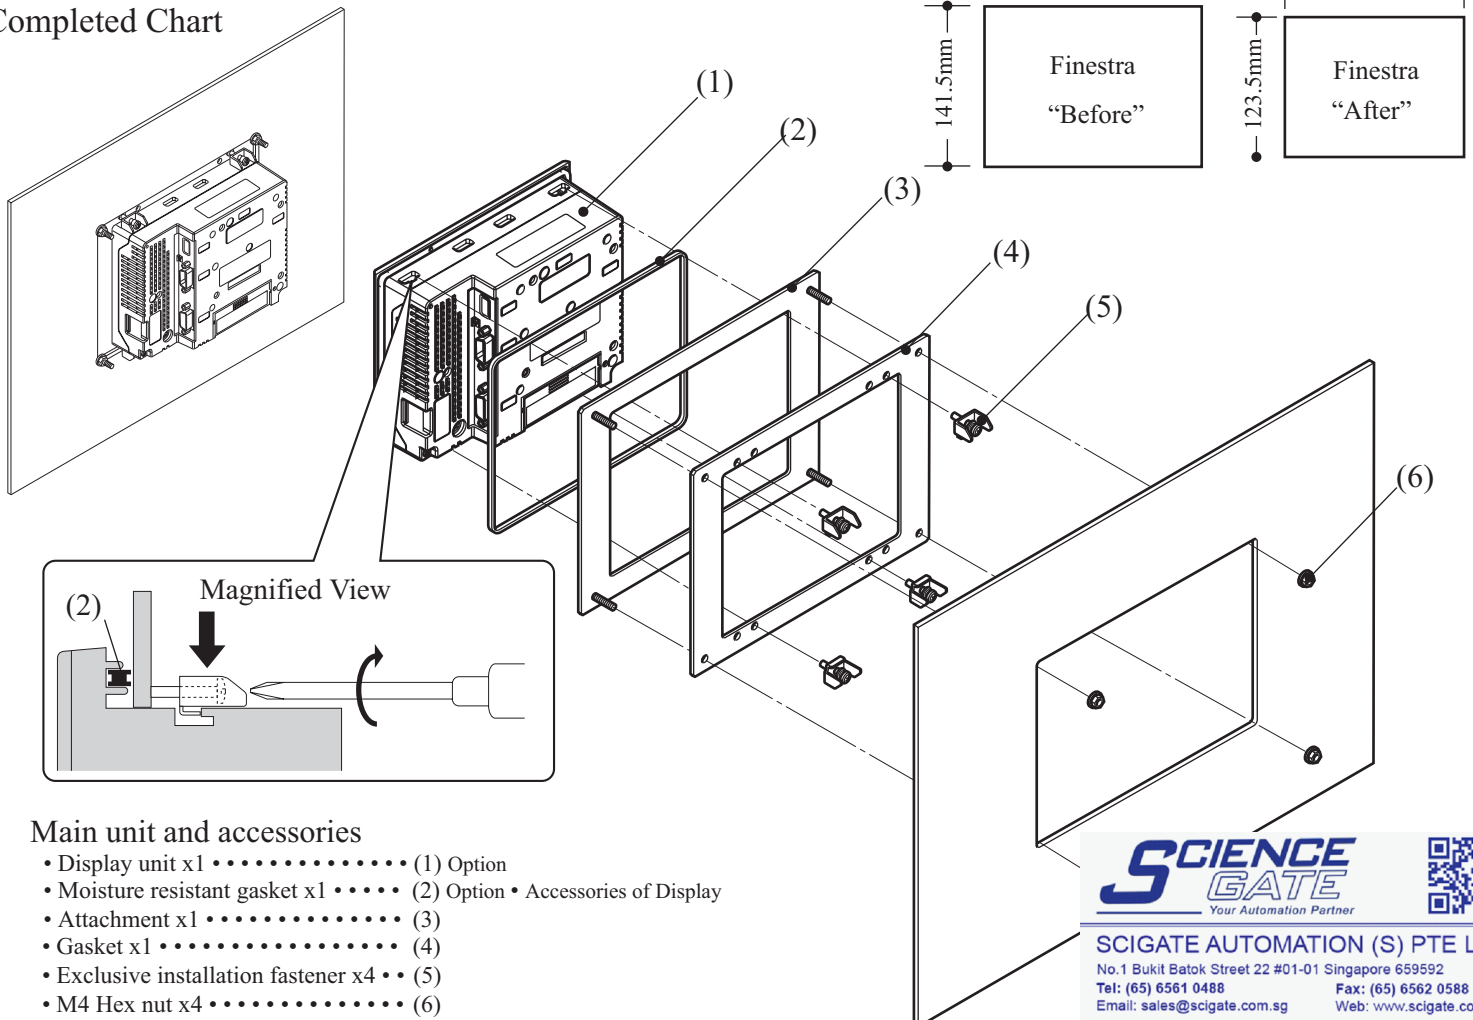

Main unit and accessories

- Display unit x1 (1) Option
- Moisture resistant gasket x1 (2) Option • Accessories of Display
- Attachment x1 (3)
- Gasket x1 (4)
- Exclusive installation fastener x4 •• (5)
- M4 Hex nut x4 (6)

SCIENCE GATE
Your Automation Partner

SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm