



# *Vision* OPLC™

**PLC & Touchscreen HMI**



**Vision290™**



**Vision280™**



**UNITRONICS**

# PLC & HMI with Touchscreen LCD

The Vision280™/Vision290™ is a high-performance PLC and a touchpanel HMI integrated into one seamless device. The PLC can handle up to 171 I/Os via Snap-in and Expansion modules. Advanced communication options include GPRS, SMS, Ethernet, MODBUS and CANbus. The Graphic HMI displays 'touchable' images and texts according to real-time conditions. 'Touch' properties can be assigned to all text and graphic on-screen elements.



## Product Specifications



	V280	V290
<b>Graphic Display Screen</b>		
Type	Black & White FSTN LCD	Black & White FSTN LCD
Touchscreen	Resistive, Analog	Resistive, Analog
Illumination Backlight	CCFL (Fluorescent lamp)	CCFL (Fluorescent lamp)
Display Resolution	320 x 240 pixels (QVGA), 4.7" active area	320 x 240 pixels (QVGA), 5.7" active area
HMI Displays	Up to 255	Up to 255
<b>Keyboard</b>		
Number of Keys	27, user-labeled, includes soft keys & numeric keypad	Virtual Keyboard
<b>Program</b>		
Application Memory	1000K	
Execution Time for Bit Operation	0.5µsec	
Memory Bits (coils)	4096	
Memory Integers (registers)	2048	
Long Integers (32 bit)	256	
Memory Floats	24	
Double Word (32 bit unsigned)	64	
Timers (32 bit)	192	
Data Tables	Up to 120K (RAM), 64K (Flash)	
<b>Communication</b>		
RS232/RS485	2 RS232 ports + 1 optional RS232 or RS485 (see additional communication modules)	
Ethernet	1 optional port (see additional communication modules)	
CANbus	1 port	
MODBUS	Supports MODBUS protocol, Master/Slave	
GPRS	Access your Vision using a remote PC, via wireless data transmission, SMS enabled	
GSM/CDMA	SMS messages to/from any quantity of phone numbers, Remote Access-enabled	
<b>General</b>		
Power Supply	12VDC or 24VDC	
PID	Up to 12 independent PID loops, including internal auto-tune, ramp-soak programmer and bumpless transfer (up to 32 loops without auto-tune)	
Battery Back-up	7 year typical battery back-up for all memory sections and real-time clock (RTC)	
Environment	IP65/NEMA4X (front panel, when mounted)	
Expansion option	Up to 128 additional I/Os, via plug-in expansion modules (number may vary according to expansion model)	
Dimensions	260 x 155 x 72 mm (10.24" x 6.1" x 2.8")	260 x 155 x 72 mm (10.24" x 6.1" x 2.8")
Article Number	V280-18-B20B	V290-19-B20B

## Additional Communication Modules

An additional COM module can be installed in any Vision OPLC<sup>3</sup>.

Article number	Communication port
V200-19-ET1	1 Ethernet port
V200-19-RS4 <sup>2</sup>	1 RS232/RS485 port
V200-19-RS4-X <sup>2</sup>	1 RS232/RS485 port (Isolated)

<sup>1</sup> Certain digital inputs can function as high-speed counters, shaft-encoder inputs, frequency measurers or normal digital inputs.

<sup>2</sup> V200-18-E5B, V200-19-RS4 and V200-19-RS4-X are not yet UL certified.

<sup>3</sup> Vision230™, Vision260™, Vision280™, Vision290™.

## Snap-in I/O Modules

Article Number	V200-18-E1B	V200-18-E2B	V200-18-E3XB	V200-18-E4XB	V200-18-E5B <sup>2</sup>
Digital Inputs (Isolated)	16 pnp/npn Inputs (24VDC)	16 pnp/npn Inputs (24VDC)	18 pnp/npn Inputs (24VDC)	18 pnp/npn Inputs (24VDC)	18 pnp/npn Inputs (24VDC)
High-speed Counter/Shaft Encoder/Frequency Measurer <sup>1</sup>	Two 10 kHz pnp/npn Inputs	Two 10 kHz pnp/npn Inputs	Two 10 kHz pnp/npn Inputs	Two 10 kHz pnp/npn Inputs	Two 10 kHz pnp/npn Inputs
Analog Inputs	Three 10 bit Inputs, 0-10V, 0-20mA, 4-20mA	Two 10 bit Inputs, 0-10V, 0-20mA, 4-20mA	Four Isolated 14 bit Inputs, 0-10V, 0-20mA, 4-20mA. May also be set to Thermocouple or PT100 (Res. 0.1°)	Four Isolated 14 bit Inputs, 0-10V, 0-20mA, 4-20mA. May also be set to Thermocouple or PT100 (Res. 0.1°)	Three 10 bit Inputs, 0-10V, 0-20mA, 4-20mA
Temperature Measurement	None	None			None
Digital Outputs (Isolated)	4 pnp/npn Outputs (24VDC) 10 Relay Outputs	4 pnp/npn Outputs (24VDC) 10 Relay Outputs	2 pnp/npn Outputs (24VDC) 15 Relay Outputs	2 pnp/npn Outputs (24VDC) 15 pnp Outputs (24VDC)	2 pnp/npn Outputs (24VDC) 15 pnp Outputs (24VDC)
High-speed Output/ PWM	2 Transistor Outputs are high-speed outputs, 50 kHz for npn / 2 kHz for pnp				
Analog Outputs	None	Two 12 bit Outputs, 0-10V, 0-20mA, 4-20mA	Four Isolated 12 bit Outputs, 0-10V, 4-20mA	Four Isolated 12 bit Outputs, 0-10V, 4-20mA	None

# Networking & Communication

## Ethernet via TCP/IP

The universal COM standard, now embedded in Vision controllers. The Vision's Ethernet port enables MODBUS commands over TCP/IP to run on existing LAN wiring. Use the Ladder function blocks to easily implement:

- PC access via SCADA, VisiLogic or Remote Access utilities.
- PLC to PLC data exchange via TCP/IP
- External slave device access (for any MODBUS over TCP/IP supporting device)

## GPRS

Use GPRS wireless data transmission services to access your Vision OPLC™ via the Internet.

The Vision OPLC™ can transmit IP packets of data to a remote PC connected to the Internet, using a dedicated IP.

GPRS enables you to operate remote PLCs on-line, upload, download, debug programs, and log application data—no wires required.



## Additional Communication Protocols


The "Protocols" Function Block enables the Vision OPLC™ to communicate, via RS232 and RS485, with a broad variety of external devices, such as bar-code readers and servos.

## OPC Server / DDE Server

Unitronics' OPC and DDE Servers enable the Vision OPLC™ to exchange data with any Windows-based application.

## Remote Access

Use your PC to access remote Vision units, via network connections, Ethernet or GPRS/GSM/CDMA/Landline modem. Use powerful Remote Access utilities to operate the controller (via Ladder software or independently), download or debug PLC programs, read/write/store online operand and database values, and send application data to Excel according to a user-defined schedule.

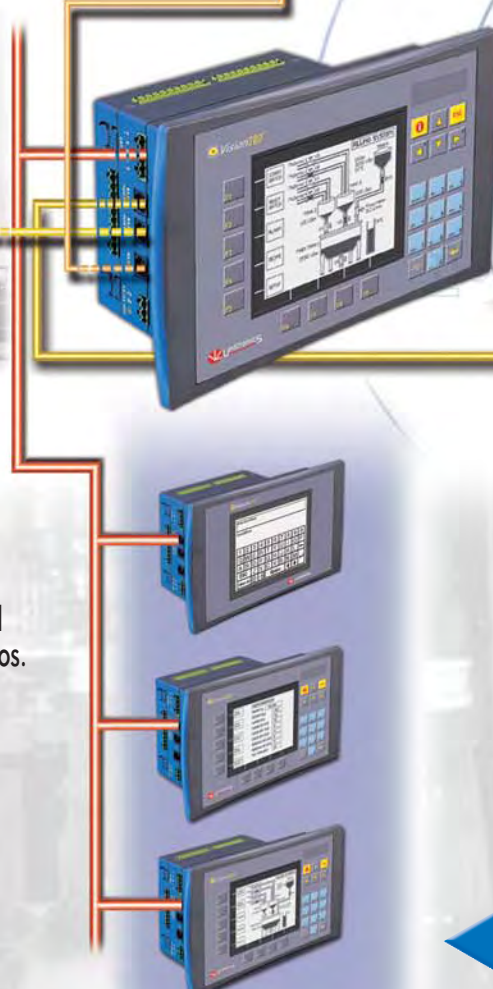

## SMS Control

The Vision OPLC™ can send and receive text and variable SMS messages to/from any GPRS/GSM/CDMA cellular phone. You can send SMSs to modify parameters in your system.

The controller can auto-acknowledge the message, answer your data requests and send SMSs to notify you of system faults.

## MODBUS


Establish master/slave MODBUS communication via two RS232 ports, RS485 or Ethernet port.

## CANbus

Integrate up to 63 units into a high-speed network, using Unitronics' CANbus protocol.

# VisiLogic Ladder Software

## One Windows-based program for both PLC & HMI

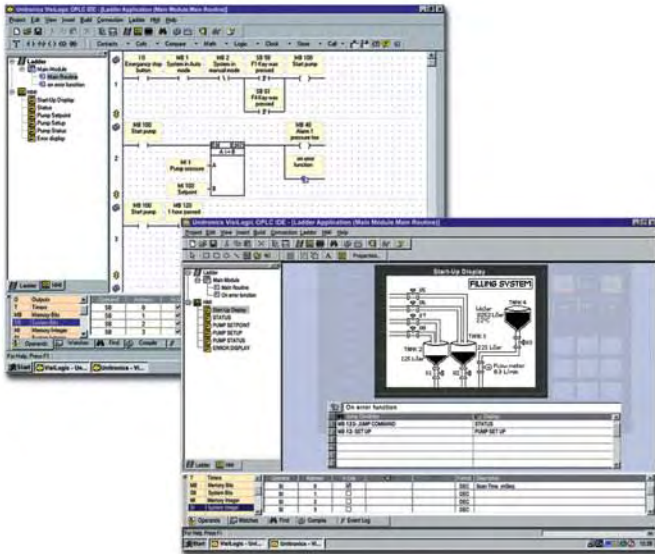


### PLC editor:

- Click & drop Ladder elements
- Modular program function; create subroutines & call them into your program
- Built-in Function Blocks & utilities save application capacity & cut programming time
- Embedded modem support for remote access & SMS messaging

### HMI editor:

- Assign "Touch" properties to any screen element
- Import or design any image
- Create and display text messages
- Use images & graphs to reflect current variable values & historical trends
- Assign functions to the keyboard, softkeys & Touchscreen elements


## More features



Up to 12 PID Loops, including Auto-tune



Information Mode

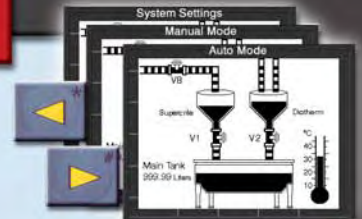

Scroll between Recipes



Smart Database - 120K

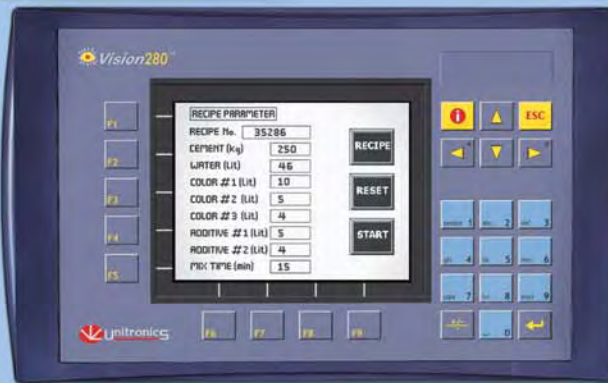


Image Library



High-speed I/Os

HMI Graphs & Trends



Temperature, weight & strain measurement



**UNITRONICS**

www.unitronics.com

Israel Headquarters:  
Unitronics Building, Airport City  
P.O.B. 300, Ben Gurion Airport, Israel 70100  
Tel: +972 3 977 88 88, Fax: +972 3 977 88 77

export@unitronics.com

V280-SCE0106  
Printed Jan. 2006