

More Precision


CSP2008 - Universal controller for up to six sensor signals

The controller CSP2008 has been designed to process 2 to 6 both optical and other sensors from Micro-Epsilon (6 digital or 4 analog input signals max., 2x internal + 4x external via EtherCAT modules from the company Beckhoff. EtherCAT is intended as external bus for connecting further sensors and I/O modules. The controller is equipped with a display offering multicolour backlighting which changes its color in the case of exceeding the limit value while a signal is displayed.

Features

- Real-time processing of input and output signals at up to 100kHz (user selectable)
- Unique user interface for the configuration of the controller via Ethernet on a PC or laptop. All user selectable functions of the controller and the measured values can be viewed, displayed and stored in real time via your own web browser without installing any 3rd part software
- Simple sensor connection with automatic sensor recognition, configuration of the sensor using buttons and display on controller or via web browser
- Modular system upgradable with additional I/O modules for customer-specific requirements. The internal communication between I/O components using EtherCAT connection (CSP 2008 acts as master)
- Extremely flexible and powerful functionality; function modules can be combined in many ways.
- Simple mounting using DIN rail TS 35

System setup

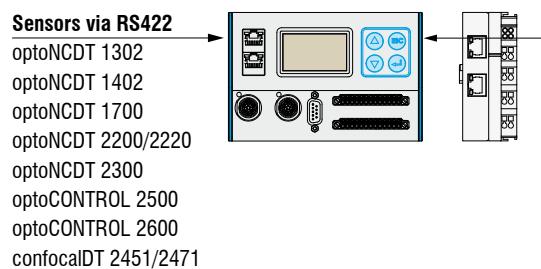

Beckhoff modules for extended inputs / outputs

- ```


EK1100 (EtherCat bus coupler)
EL1002 (2x digital input 24V/3ms)
EL1012 (2x digital input 24V/10µs)
EL1014 (4x digital input 24V/10µs)
EL1104 (4x digital input 24VDC/4K/24V)
EL2002 (2x digital output 24V/0.5A)
EL2004 (4x digital output 24VDC)
EL3142 (2x analog input 0...20mA/16bit)
EL3162 (2x analog input 0..10V/16bit)
EL4024 (4x analog output 4..20mA/12bit)
EL4102 (2x analog output 0...10V/16bit)
EL4132 (4x analog output -10..10V/16bit)
EL5101 (1x encoder input 5VDC RS422/16bit)
RS422 (Extension terminal for CSP2008)
EK1122 (2x EtherCAT switch)

```




### Application fields

- Height measurement with 2 sensors
- Coplanarity measurement
- Flatness and roundness measurement with synchronised sensors
- Thickness measurement

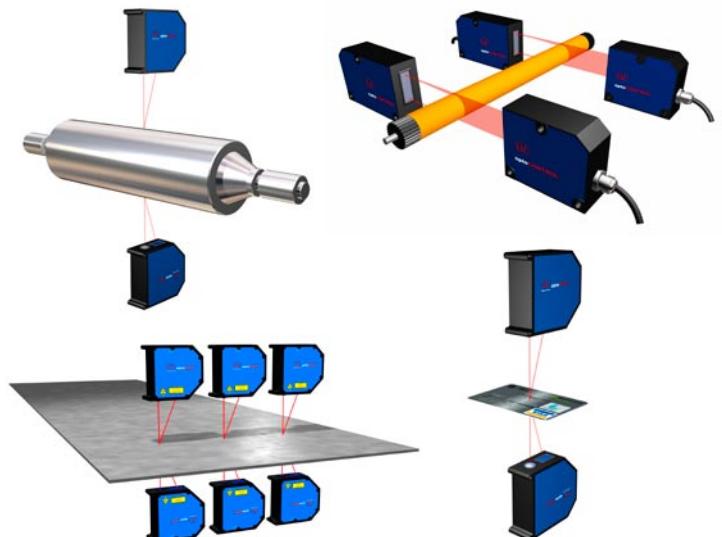


### Application example: Real Time thickness measurement with 2 optoNCDT laser sensors

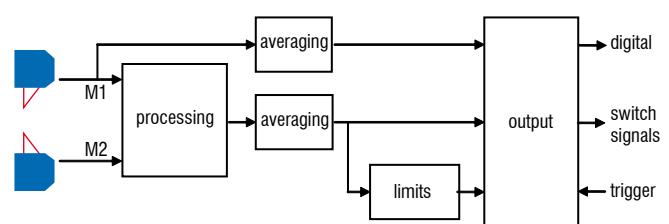

# CSP2008 - Universal controller for up to six sensor signals

|                       |                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type                  | Universal controller CSP2008                                                                                                                                                                                                                                                                                                                                     |
| Measuring frequencies | 0.312...100 kHz (2 sensors)                                                                                                                                                                                                                                                                                                                                      |
| Inputs/outputs        | sensors: 2 sensor connectors (16 pin)                                                                                                                                                                                                                                                                                                                            |
|                       | digital<br>1x Ethernet (PC 100 MBit)                                                                                                                                                                                                                                                                                                                             |
|                       | 1x EtherCAT (master, for Beckhoff I/O modules)                                                                                                                                                                                                                                                                                                                   |
|                       | 1x RS422 (PLC max 1.5 Mbaud) (electrically isolated)                                                                                                                                                                                                                                                                                                             |
|                       | 2 terminal strips (13 pins)                                                                                                                                                                                                                                                                                                                                      |
|                       | analog<br>voltage 0...5 V, scaleable via software 0...10 V, -5...5 V, -10...10 V), electrically isolated, 100 kHz, 16 Bit                                                                                                                                                                                                                                        |
| Functions             | filter: moving average 1...1024 / recursive 1...32768 / median 3/5/7/9<br>zero, master<br>trigger (measuring value, edge, gate, software)<br>limits (UL, LL, UW, LW, OK)<br>calculation: A,B; A+B; A-B; -A-B; K-A-B; K+A+B; K+A-B; K+A; K+B; K(A+B); K(A+k*B)<br>automatic sensor detection (digital interface)<br>scaleable measuring ranges<br>synchronisation |
| Firmware              | storable configuration (max 20); bilingual (english-german)                                                                                                                                                                                                                                                                                                      |
| Buttons               | 4 (↑; ↓; ←; ESC)                                                                                                                                                                                                                                                                                                                                                 |
| Display               | Multi colour graphic display 52x30 mm; LED for successful connection controller/sensor                                                                                                                                                                                                                                                                           |
| Power supply          | 9-36V, reverse polarity protection                                                                                                                                                                                                                                                                                                                               |
| Power supply sensors  | max 2 sensors 24 VDC ±15%                                                                                                                                                                                                                                                                                                                                        |
| EMC                   | DIN EN 61326-1:2006                                                                                                                                                                                                                                                                                                                                              |
| Transient emissions   | class A CISPR 11                                                                                                                                                                                                                                                                                                                                                 |
| Weight                | appr 500 g                                                                                                                                                                                                                                                                                                                                                       |
| Connection            | 2x push-pull connectors<br>2x RJ45<br>1x DSUB 9 pin<br>2x plugable spring terminal                                                                                                                                                                                                                                                                               |
| Optional feature      | key switch (laser on/off)                                                                                                                                                                                                                                                                                                                                        |
| Protection class      | IP 40                                                                                                                                                                                                                                                                                                                                                            |
| Operating temperature | 0° C to 50°C                                                                                                                                                                                                                                                                                                                                                     |
| Storage temperature   | -20°C to 70°C                                                                                                                                                                                                                                                                                                                                                    |
| Humidity              | < 90%, non condensing                                                                                                                                                                                                                                                                                                                                            |

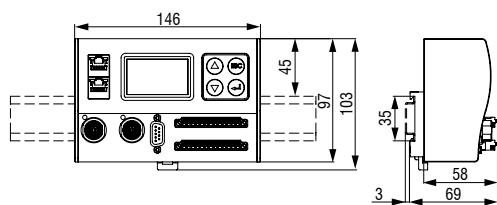

Universal controller with DIN rail TS 35  
(dimensions not to scale)

**SCIENCE GATE**  
Your Automation Partner



**SCIGATE AUTOMATION (S) PTE LTD**

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

## Micro-Epsilon

Koenigbacher Strasse 15  
94496 Ortenburg / Germany

Phone +49 85 42/1 68-0  
Fax +49 85 42/1 68 90

info@micro-epsilon.com  
www.micro-epsilon.com

certified DIN EN ISO 9001 : 2008  
modifications reserved / Y9761277-A061062GKE

