

Application Story

Civil Engineering

Aggregates and asphalts Testing




<http://www.colas.co.uk/>

Precision. Quality. Reliability

www.solartronmetrology.com • sales.solartronmetrology@ametec.com

The Product

The Orbit® 3 Network can be used to correlate many physical quantities such as force, pressure and displacement. The application demands a combination of accurate linear displacement and a current loop data. The flexibility of Orbit® 3 network allows the integration of numerous highly accurate Digital Probes and the Analogue Input Modules

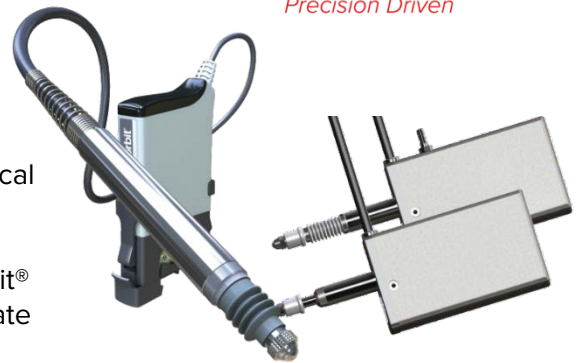

Range: up to 22 mm – **Accuracy:** between 0.2 μm and 4 μm – **Repeatability:** Below 0.15 μm – **Resolution:** Below 0.1 μm


The Challenge

The concrete or aggregate tests involve small displacement under force applications. The behaviour of the sample is then analysed accurately and characterised.

Depending on the composite elements in it, the distortions are different. A lot of research and development are engaged in road composition, such as auto-clean properties or autonomous energised road with inductive films etc.

Every news need to be verified and the engineer must look at the specifications in respect.

The test is performed on trapezoidal samples taken from the road surface or cut out of laboratory produced slabs using the BBPAC plate compactor.

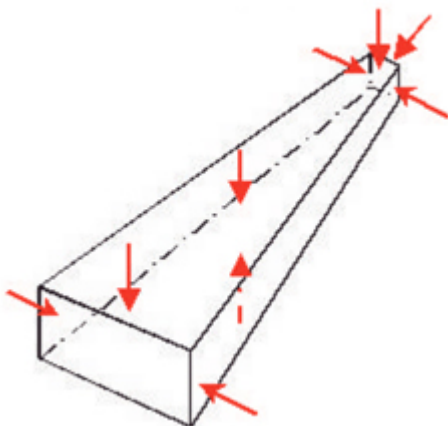

The device provides automatic monitoring of size characteristics and aggregate trapezoidal sample weight (base 56 or 70mm).



The samples are cut from aggregate slabs (NFP 98-250-3) and are used for two-point bending complex module tests (2PB-TR) (NF EN 12697-26 Appendix A) as well as for fatigue tests in two point bending compliant by universal normative

The Solution

DP Pneumatic push (10 mm) and Linear encoder (12 mm) has been selected.

A dedicated software has been designed for specific supervision link with 9 pneumatic sensors measure the sample sizes; these sizes are used in calculating samples' complex module values on 3MC, but also for determining the ϵ_6 fatigue value on M2F

With 150 available channels and a fast USB connection to the industrial computer, the users can connect or disconnect the number of modules corresponding to the application he have.

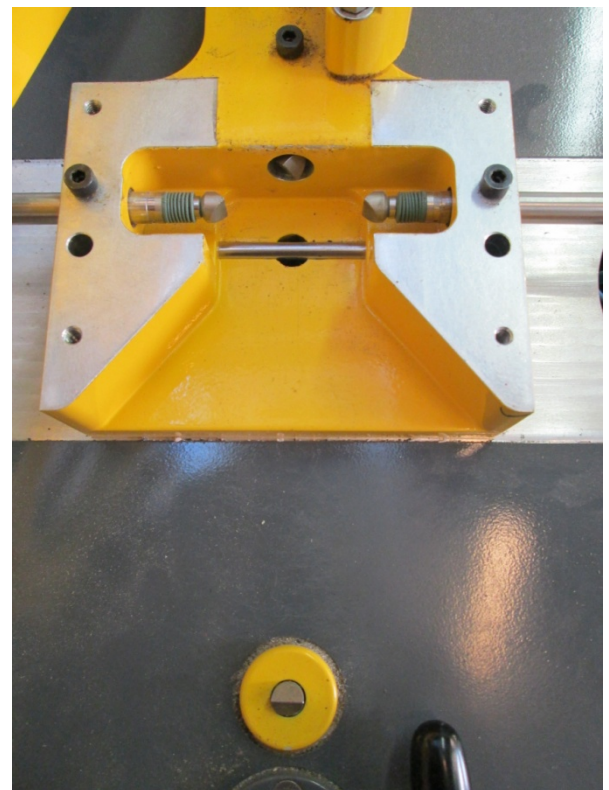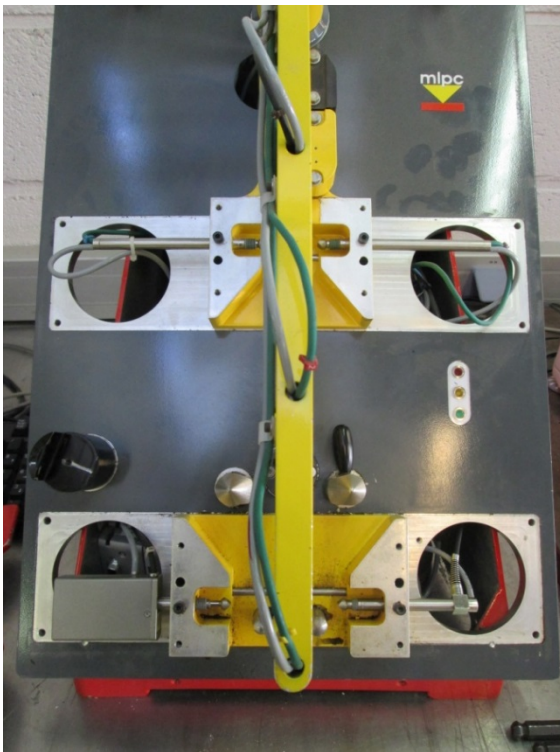

Photos : Vectra - <http://vectrafrance.com>

The combination of software and measurement tools dedicated to this particular application meets the user's objectives of safety of a complete tool and ensures that the ease of use and maintenance is perfectly optimised. The traceability is perfectly addressed in the software and all the analysis and the reports could be saved or loaded as required.

The Asphalts could then be modified and reanalysed for more tests to get the perfect behaviour on the road.


Orbit® 3 – The Total Measurement System from Solartron Metrology

The Solartron Orbit® 3 Digital Measurement System, in conjunction with Solartron's wide range of transducers, including both contact and non-contact linear measuring transducers (gauging probes), specialist transducers and third party transducer interfaces, provides a limitless set of measuring system solutions, with numerous different interfaces to computers and PLC's, making Orbit® 3 completely flexible.


Supports all Solartron Sensors



Interface via USB, RS232, Ethernet and Modbus Output

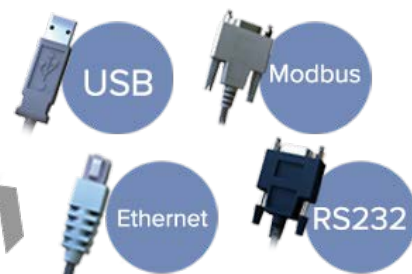

Interface to various sensors and readouts



Up to 150 Sensors





SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

United Kingdom - Head Office

Solartron Metrology
Steyning Way
Bognor Regis
West Sussex
PO22 9ST
Tel: +44 (0) 1243 833333
Fax: +44 (0) 1243 833322
Sales.solartronmetrology@ametek.com

France

Solartron Metrology
Rond-point de l'Espine des Champs
Buroplus - Bat. D
Elancourt 78990
Tel: +33 (0)1 30 68 89 50
Fax: +33 (0)1 30 68 89 59
france.solartronmetrology@ametek.com

Germany

Ametek GmbH
Solartron Metrology Division
Rudolf-Diesel-Strasse 16
40670 Meerbusch
Tel: +49 (0) 2159 9136 500
Fax: +49 (0) 2159 9136 505
vertrieb.solartron@ametek.de

Brazil

Ametek do Brasil, Ltda
Rod. Eng Ermenio de Oliveira Penteadou, Km 57, SP75
Bairro Tombadouro
13337-300, Indaiatuba, SP, Brazil
Tel: +55 19 2107 4126

India

Ametek Instruments India Private Limited
1st Floor, Left Wing
Prestige Featherlite Tech Park
Plot #148, EPIP II Phase
Whitefield, Bengaluru 560 066
Karnataka, India
Tel: +91 80 6782 3200
Fax: +91 80 6782 3232

USA

Solartron Metrology
USA Central Sales Office
915 N. New Hope Road, Suite C
Gastonia, NC 28054
Tel: +1 800 873 5838
Fax: +1 704 868 8466
usasales.solartronmetrology@ametek.com

China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd
No. 155 Puhui Road
Ju Ting Economic Development Zone
Shanghai 200131, China
Tel: +86 21 5763 2509
Fax: +86 21 5866 0969 Ext. 261/262
china.solartronmetrology@ametek.com



Solartron Metrology

Precision Driven

Offices worldwide
Agent and distributor details
available at
www.solartronmetrology.com



Q09540

Solartron pursues a policy of continuous development. Specifications in this document may therefore be changed without notice.

AMETEK®
ULTRA PRECISION TECHNOLOGIES

Precision. Quality. Reliability

www.solartronmetrology.com • sales.solartronmetrology@ametek.com