



Application Story

Aerospace

Jet engine turbine blade gauging using Digital Probes










Precision Driven

The Product

The standard DP range of Digital Spring Push Probes has justifiably become the work horse of the gauging industry. Very high resolution, excellent linearity and high data speed come as standard. Long life precision bearings, and an IP65 rating ensure that probes maintain their performance for millions of cycles.

Range: 2 to 20mm – Accuracy: Up to 0.05% of reading – Resolution: Up to 0.01 μ m – Repeatability: Up to 0.15 μ m





The Challenge

Specialists in the investment casting and machining of alloy metals, such as aluminium and titanium, which are primarily used for jet aircraft engines and airframes, have to measure the dimensions of the blades after surface grinding.

After casting, the turbine blades undergo surface grinding to complete the collaboration of surfaces. The dimensions of the blade post-grind then need to be accurately measured as the initial proportions from the casting will have changed slightly. A precision process application is required to conform to final specification requirements (dimensional accuracy and surface finish).

The Solution

Using the Digital Spring Push Probes (DPs), the measurements from the desired locations on the turbine can be taken, and fed into the digital readout (SI5500). Measurement data from the SI5500 is transmitted via the unit's RS232 output to a PC running a statistical process control system. This data is then used to monitor the performance of the grinding process and the quality of the finished parts, providing traceability records from the start of the process to the finished part..




The SI5500 can interface up to 31 Orbit® 3 Modules and supports Digital Probes, Linear Encoders and Encoder Input Modules. It gives the user the option to select data display formats and program metrology functions.

The SI5500 features an intuitive, menu-driven multiple-channel display which can be programmed to display readings, set Limits/Alarms, Peak Hold, Track or act as a Data Logger. The screen can be set-up as single channel or multiple channel configurations. Users can construct mathematical formulae and algebraic equations to get a wide variety of results for their gauging applications.





x2 Ultra feather touch probes and x2 Orbit® LTH non-contact lasers measuring a turbine via the Orbit® Network.

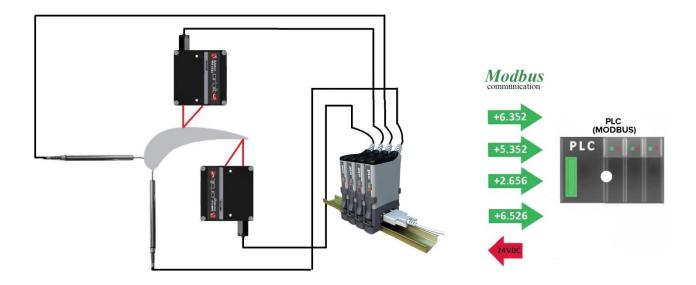





SCIGATE AUTOMATION (S) PTE LTD

Business Hours: Monday - Friday 8.30am - 6.15pm

United Kingdom - Head Office

Solartron Metrology Steyning Way Bognor Regis West Sussex PO22 9ST Tel: +44 (0) 1243 833333

Fax: +44 (0) 1243 833322 Sales.solartronmetrology@ametek.com

France

Solartron Metrology Rond-point de l'Espine des Champs Buroplus - Bat. D Elancourt 78990 Tel: +33 (0)1 30 68 89 50 Fax: +33 (0)1 30 68 89 59 france.solartronmetrology@ametek.com

Germany

Ametek GmbH Solartron Metrology Division Rudolf-Diesel-Strasse 16 40670 Meerbusch Tel: +49 (0) 2159 9136 500 Fax: +49 (0) 2159 9136 505 vertrieb.solartron@ametek.de

Brazil

Ametek do Brasil, Ltda Rod. Eng Ermenio de Oliveira Penteado, Km 57, SP75 Bairro Tombadouro 13337-300, Indaiatuba, SP, Brazil Tel: +55 19 2107 4126

India

Ametek Instruments India Private Limited 1st Floor, Left Wing Prestige Featherlite Tech Park Plot #148, EPIP II Phase Whitefield, Bengaluru 560 066 Karnataka, India Tel: +91 80 6782 3200 Fax: +91 80 6782 3232

USA

Solartron Metrology USA Central Sales Office 915 N.New Hope Road, Suite C Gastonia, NC 28054 Tel: +1 800 873 5838 Fax: +1 704 868 8466

us a sales. so lar tron metrology@ametek.com

China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd No. 155 Puhui Road Ju Ting Economic Development Zone Shanghai 200131, China Tel: +86 215763 2509 Fax: +86 21 5866 0969 Ext. 261/262 china.solartronmetrology@ametek.com



Offices worldwide Agent and distributor details available at www.solartronmetrology.com





Q09540

Solartron pursues a policy of continuous development. Specifications in this document may therefore be changed without notice.

