

Product catalogue

Measuring. Testing. Automation.








SCIGATE AUTOMATION (S) PTE LTD

Contents

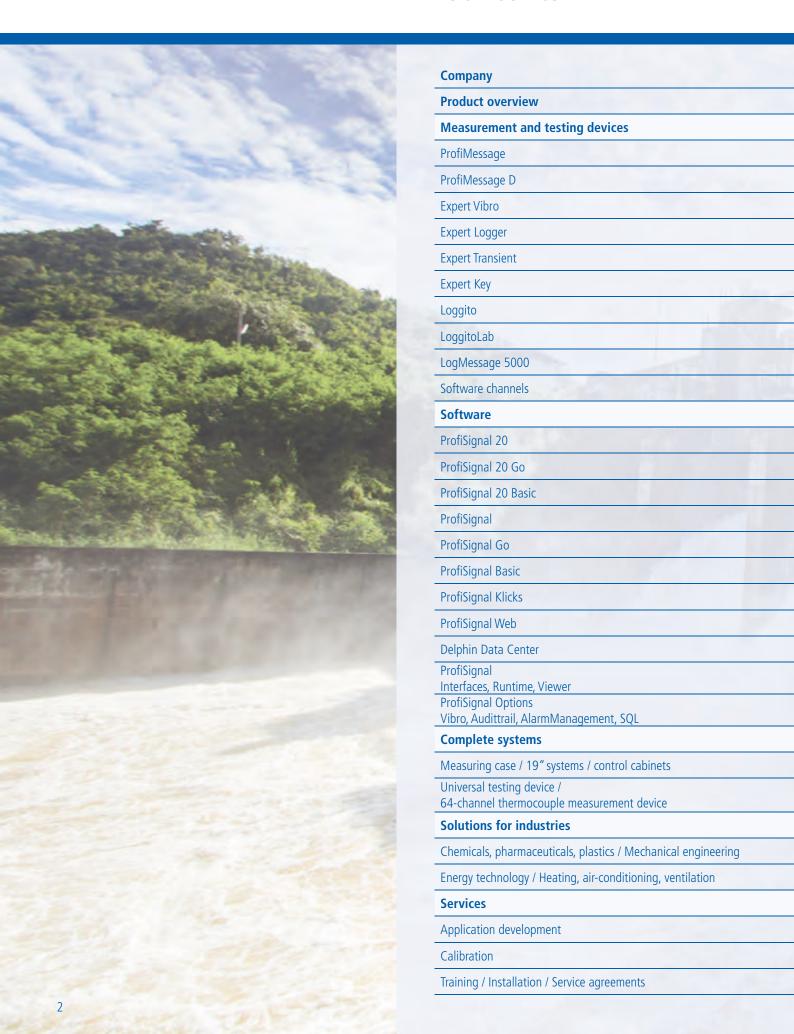

Page 4	
Page 4	
Page 6	
Page 8	
Page 10	
Page 12	
Page 14	
Page 16	
Page 18	
Page 20	
Page 22	
Page 24	
Page 26	
	THE STATE OF THE S
Page 28	
Page 30	
Page 32	
Page 34	
Page 36	
Page 38	
Page 40	
Page 42	
Page 44	
Page 46	
Page 48	
Page 50	
Page 52	
Page 54	
Page 56	
Page 58	
Page 62	
Page 64	
	3



Your **partner** for industrial **measurement and testing technology**

Since 1980, Delphin Technology AG has been developing, manufacturing and marketing pioneering, high-quality measuring hardware and software solutions for industrial measurement and testing technology.

We are a competent and reliable partner to worldwide customers — both for standard measurement systems and individualised complete systems. Our team of technical specialists are committed to their work and transform creative ideas into practical products. The main applications for our products range from measurement data acquisition and analysis, test stand automation and monitoring through to vibration measurement technology. Our products are being used in a wide variety of sectors, including electrical engineering, mechanical engineering, energy technology and the chemical and pharmaceutical industries.

Continuity – Focussing on customers

We focus on our customers who then benefit from our technical know-how and our proven practical experience in applications from almost 40 years of development work in the field of industrial measurement technology. Working closely with customers and their applications is important to us and is reflected in our product range as well as in our long-standing customer relationships. Many medium-sized companies, globally renowned industrial groups as well as research laboratories, authorities and universities place their trust in us and benefit from our many years of experience.

Quality – Made in Germany

A top priority is the continuous development of our products in accordance with the highest quality standards. Delphin Technology AG is certified according to ISO 9001:2015. This ensures that our products meet the most stringent quality requirements to provide reliable operation in your applications. With Delphin, you have the assurance that the products have been "Made in Germany".

Innovation – Intelligent measurement technology

Through continuous technological development, we aim to supply our customers worldwide with intelligent and universally usable data acquisition devices and intuitive measurement software. Our customers must be able to carry out their measurement and monitoring tasks at high-levels of efficiency and safety. We support you with our deep knowledge of products and applications and we are constantly working on new technical features and innovations which are protected by worldwide patents.

Flexibility – Individualised complete systems

Flexibility and a non-hierarchical organisation are further building blocks in our corporate philosophy. This enables us to respond to the wishes of customers and to offer individualised complete solutions in addition to standardised systems. On request, we can manufacture individualised measuring cases, control cabinets and complete test stands and, with ProfiSignal software, program application software specifically tailored to your requirements.

Customer service

Customer service is our number one priority. Our range of services includes project planning, installation, calibration, service hotline and training courses as well as project-based and individualised training. Installation and training are carried out by a competent team of experienced engineers at Delphin or at the customer's premises. Our service packages guarantee you first-class support from the outset!







Data acquisition and data logger

Test, trial & automation



LoggitoCompact
data acquisition



LoggitoLab
Compact data
measurement lab



Expert LoggerStand alone data logger



Expert KeyPC-based measurement technology



Profisignal 20Intuitive measurement software



ProfiSignal Go / ProfiSignal BasicData acquisition and analysis,

Data acquisition and analysis Operation and observation



Measurement technology globally networked



Vibration measurement

Monitoring & enviroment technology



Expert Vibro

Vibration measurement

Expert Transient

Transient data acquisition



ProfiMessage

ProfiMessage D

Modulare measurement technology and automation



measurement system




ProfiSignal Web

Web-based and mobile data acquisition



ProfiMessage – Modular data acquisition

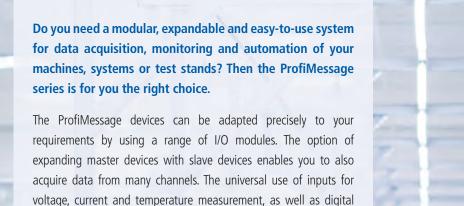

Connecting to existing machine infrastructure is extremely simple thanks to serial interfaces. At the same time, analog and digital measurement data can be processed together with data from fieldbus interfaces and stored independently in the device along with high-resolution time stamps for subsequent analysis. Integrated functions such as limit value monitoring, online calculation and logics enable easy preprocessing of measurement data.

inputs as status or frequency inputs, make the devices highly flexible.




I/O Modules	Analog inputs	Analog outputs	Frequency / Status inputs	Status inputs	Switch outputs	Total sampling rate
ADGT	8 channels, V / mV, 20 mA, RTD, thermocouples					60 Hz
ADIT	10 channels, V / mV, 20 mA, RTD, thermocouples	1 channel, 20 mA			1 channel	600 Hz
ADVT	15 channels, V / mV, 20 mA, thermocouples					600 Hz
ADFT	8 channels, V / mV, 20 mA	2 channels, 0 10 VDC	2 channels	2 channels	4 channels	8 kHz
AMDT	8 channels, V / mV, 20 mA	2 channels, 0 10 VDC	2 channels	2 channels	4 channels	10 160 kHz
AAST	4 channels, V / mV, 20 mA, RTD, thermocouples	4 channels, 20 mA		2 channels	2 channels	600 Hz
IOIT				24 channels	1 channel	
OTPT				1 channel	24 channels	
DIOT			11 channels	1 channel	16 channels	

Applications

- Monitoring of industrial processes
- Monitoring of installations and clean rooms
- Test stand automation
- Laboratory data acquisition
- Fault data acquisition
- Energy optimisation

ProfiSignal



Offline

LAN



Online



Voltages [mV, V]

Currents [mA]



Resistor




Thermocouples [J, K, B, N, S ..]



Output signals

RTD



Interfaces

- Modbus TCP/RTU
- PROFIBUS DP, CAN RAW
- RS232, RS485



Product features

- Two slots for I/O modules in each master and slave device
- Options of a range of I/O modules
- Extendible system: option of up to 20 slave devices on one master device
- Automatic email notification in alarm events

Sensor connection

- Universal analog inputs (mV, mA, thermocouples, RTD)
- Configurable analog outputs
- Switchable signals, frequency and pulse counters

Interfaces

- Serial interfaces RS232, RS485
- Modbus TCP/RTU
- PROFIBUS DP, CAN RAW
- Configuration of individual ASCII protocols
- OPC UA

Data storage

- Up to 15.5 GB internal storage
- External storage media (USB)
- Event-triggered recording with pre and post histories
- Push function

- Modular
- Extendible
- Flexible I/O module options
- External data storage
- High galvanic isolation voltage

ProfiMessage D – Modular measuring, monitoring



I/O Modules	Analog inputs	Analog outputs	Frequency / Status inputs	Status inputs	Switch outputs	Total sampling rate
ADGT	8 channels, V / mV, 20 mA, RTD, thermocouples					60 Hz
ADIT	10 channels, V / mV, 20 mA, RTD, thermocouples	1 channel, 20 mA			1 channel	600 Hz
ADVP	15 channels, V / mV, 20 mA, RTD, thermocouples					600 Hz
ADVT	15 channels, V / mV, 20 mA, thermocouples					600 Hz
ADFT	8 channels, V / mV, 20 mA	2 channels, 0 10 VDC	2 channels	2 channels	4 channels	8 kHz
AMDT	8 channels, V / mV, 20 mA	2 channels, 0 10 VDC	2 channels	2 channels	4 channels	10 160 kHz
AAST	4 channels, V / mV, 20 mA, RTD, thermocouples	4 channels, 20 mA		2 channels	2 channels	600 Hz
IOIT				24 channels	1 channel	
OTPT				1 channel	24 channels	
DIOT		·	11 channels	1 channel	16 channels	


and automating


Applications

- Modular data acquisition
- Process data acquisition and preprocessing
- Fault data recording and damage analysis
- Data automation for experiments and test stands
- Remote data monitoring for machines and systems
- Clean room monitoring
- Laboratory data acquisition and automation

ProfiSignal







Interfaces

- Modbus TCP/RTU
- PROFIBUS DP, CAN RAW
- RS232, RS485
- PROFINET
- OPC UA*



Product features

- Two slots for I/O modules in each master and slave device
- Options of a range of I/O modules
- Extendible
- Configurable internal display in the master device
- WLAN interface for wireless data transmission (optional)
- Automated email and textmessage alerts

Sensor connection

- Universal analog inputs (mV, mA, thermocouples, RTD)
- Configurable analog outputs
- Switchable signals, frequency and pulse counters

Interfaces

- Serial interfaces RS232, RS485
- PROFIBUS DP, CAN RAW
- PROFINET (optional)
- OPC UA*, Modbus TCP/RTU
- Configuration of individual ASCII protocols

Data storage

- 4 GB or 16 GB internal storage
- External storage media (USB, NAS)
- Event-triggered recording with pre and post histories
- Push function

Product highlights

- Modular and extendible
- Flexible I/O module options
- Internal display
- Software channels for analysis, control, regulation and monitoring
- Versatile interfaces, e.g. PROFINET and OPC UA*
- Internal data storage
- External data storage
- High galvanic isolation voltage

* HA optional 11

Expert Vibro – The **vibration specialist**



Applications

- Shaft vibration monitoring and analysis
- Monitoring of vibrations in machines and housings
- Rolling bearing monitoring and bearing damage diagnosis
- Spindle monitoring and balancing
- Combustion chamber vibration monitoring
- Gearbox vibration analysis
- Air-gap monitoring
- Mobile vibration measurement




A COLUMN TO THE PARTY OF THE PA

Extension bus (synchronous)

LAN





Spectra, cascade

Interfaces

- Modbus TCP/RTU
- PROFIBUS DP, CAN RAW
- RS232, RS485
- OPC UA*



Product features

- 4, 8, 12 or 16 individually triggerable vibration inputs
- Calculation and monitoring of characteristic values
- Online computation of measurement data
- Integrated analysis functions for gear and roller bearing monitoring, air-gap etc.
- Spectrum online up to 12,800 lines (FFT)
- Integration functions (two-stage)
- 50 kHz sampling rate per channel
- 24-bit A/D converter

Sensor connection

12 .. 24 V

AC/DC

- Software switchable analog inputs
 - Shaft vibration / distance sensors
 - Acceleration sensors
 - Vibration velocity sensors
 - mV / mA signals (pressure etc.)
- Switchable IEPE power supply
- Integrated comparators for KeyPhasor® sensors
- Measuring range up to ± 25 V
- Pluggable screw terminals

Interfaces


- LAN, USB, WLAN (optional), LTE (optional)
- Serial interfaces RS232, RS485
- OPC UA*, Modbus TCP/RTU
- PROFIBUS DP, CAN RAW
- Individual ASCII protocols

Data storage

- 2 GB or 14 GB internal storage
- External storage media (USB, NAS)
- Triggered storage with pre and post histories

- Synchronous analog inputs, 50 kHz sampling rate per channel
- Calculation and monitoring of characteristic values
- Spectrum online up to 12,800 lines (FFT), integrated IEPE power supply
- Extendible

Expert Logger — Stand alone **data logger** with int



expert Logger is available in four variants differing in their number of analog and digital channels. With just one device, you can independently process up to 46 analog input channels, at both low and high sampling rates. All channels are galvanically isolated from each other. Measured data undergoes precision recording, monitoring and preprocessing and can be stored internally within the device. LAN, USB, WLAN or UMTS / LTE are available to transfer measurement data to a PC or server. Integrated interfaces such as PROFIBUS, Modbus and OPC UA enable optimal connectivity to existing infrastructure.

The Expert Logger is highly flexible to meet your specific measurement requirements. Simple and quick channel configuration enables the Logger to be efficiently adapted to your requirements and can be up and running in the shortest possible time.



Expert Logger

LAN

WLAN / LTE


Туре	100	200	300	400
Analog inputs for mV, mA, thermocouples	16	32	46	16
Appropriate for RTD	8	16	23	8
Total sampling rates (measurements / sec.)	1000	2000	3000	1000
Analog outputs	0	0	0	6
Digital / frequency inputs	4	4	0	1
SDI-12 sensor bus	1	1	0	0
Digital / PWM outputs	4	4	0	0
Digital inputs / outputs	4	4	1	24

uitive operation

Applications

- Measurement data acquisition
- Environmental measurement technology
- Product testing
- Laboratory data acquisition
- Fault data acquisition
- Trials and testing
- Energy data acquisition and optimisation
- Remote data transmission
- Control

ProfiSignal Data acquisition and analysis

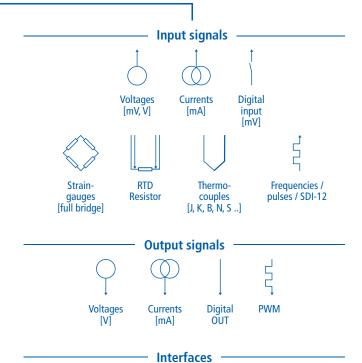

- Modbus TCP/RTU
- PROFIBUS DP, CAN RAW
- RS232, RS485
- SDI-12
- OPC IIA³



Product features

- Up to 46 universal analog inputs
- Up to 24 digital inputs and switching outputs
- Remote monitoring via a UMTS / LTE interface (optional)
- WLAN interface for wireless data transmission (optional)
- Automated email and textmessage alerts

Sensor connection

- Universal analog inputs (mV, mA, thermocouples, RTD)
- Switch signals, frequency and pulse counters
- Pluggable screw terminals

Interfaces / Protocols

- LAN, USB
- SDI12 interface for environmental sensors
- Serial interfaces RS232, RS485
- OPC UA*, Modbus TCP/RTU
- PROFIBUS DP, CAN RAW
- Configuration of individual ASCII protocols
- NMEA for GPS sensors (optional)

Internal / external data storage

- 2 GB or 14 GB internal storage
- External storage media (USB, NAS)
- Event-triggered recording with pre and post histories
- Push function

Product highlights

- Universally usable inputs
- Software channels for analysis, monitoring, control and regulating
- Versatile interfaces
- High galvanic isolation voltage
- UMTS / LTE, WLAN, USB
- PROFIBUS Sniffer
- Many channels in a minimum of space
- 24-bit resolution and high-precision measurement
- External data storage

* HA optional 15


Expert Transient – Synchronous **fault specialist**



Applications

- Fault finding and analysis of PLC-based systems and machines without having to interrupt control systems
- · Crash, detonation and explosion testing
- Fast data acquisition on test stands
- Data acquisition from drive systems and frequency converters
- Fault analysis on gas compressor plants, turbines, compressors and conveyor belts
- Materials research and environmental simulation

ProfiSignal



External storage

Interfaces

- Modbus TCP/RTU
- PROFIBUS DP, CAN RAW
- RS232, RS485
- PROFIBUS Sniffer
- OPC UA*



Product features

- Synchronous acquisition of 4, 8, 12 or 16 galvanically isolated analog inputs
- Definable multiple, flexible trigger events
- Online calculation of effective and peak values
- 50 kHz sampling rate per channel
- 24-bit resolution and high-precision measurement
- Email and textmessage alerts
- Extendible

Sensor connection

- mV / mA signals
- Measuring range up to $\pm 25 \text{ V}$
- Pluggable screw terminals

Interfaces

- LAN, USB, WLAN (optional), LTE (optional)
- Serial interfaces RS232, RS485
- OPC UA*, Modbus TCP/RTU
- PROFIBUS DP, CAN RAW
- PROFIBUS Sniffer
- Individual ASCII protocols

Data storage

- Independent, internal 2 GB or 14 GB storage
- External storage media (USB, NAS)
- Triggered storage with pre and post histories

- Acquisition and analysis of fast, transient signals
- 4, 8, 12 or 16 individually triggerable analog inputs
- Independent operation with long-term storage
- PROFIBUS Sniffer

Expert Key – PC-based measurement technology



^{*1 4} switchable as digital outputs

^{*2 4} with PWM function

from laboratory to test stand

Applications


- Automated trials, testing and inspection
- Laboratory data acquisition
- Fast signal acquisition
- Temperature acquisition
- Servicing and installation
- PC-supported data acquisition
- Monitoring and alerting

ProfiSignal



Data acquisition and analysis

LAN USB



Product features

- Optional 14 or 28 analog inputs
- Total sampling rate 100 kHz
- Universally usable inputs and outputs
- Simple scaling
- Configuration software included
- Different versions to match requirements
- Compact design, highly flexible

Sensor connection

- Universal analog inputs (mV, mA, thermocouples, RTD)
- Digital inputs can also be used as frequency and pulse counters
- Pluggable screw terminals
- Clear connection diagram for simple wiring

Interfaces

- LAN interface
- USB interface

Data storage

- Data storage in PCs or on servers
- Intelligent database system included

Versions

- Expert Key L for laboratories and servicing
- Expert Key P for trials and testing
- Expert Key C for control cabinet construction
- Expert Key T for multi-channel temperature measurements

- Universal connection options
- Total sampling rate 100 kHz
- High precision due to differential sensor connection
- Simple configuration
- Fast connectivity via LAN or USB
- Detachable screw terminals or plug connectors for easy connection
- Reliable monitoring and alerting

Loggito – The **networking specialist**



Challier types	O AI-NID	o Ai	4 AI-NID	4 AI
Analog inputs (mV, mA (passive), thermocouples, RTD)	8 (max. 4 RTD)	0	4 (max. 2 RTD)	0
Analog inputs (mV, mA (passive), thermocouples)	0	8	0	4
Digital inputs / outputs (Combination)	2	2	2	2
Number of terminals	24	24	16	16


Applications

- Automated trials, testing and inspection
- Laboratory data acquisition
- Decentralised data acquisition
- Temperature acquisition
- Servicing and start-up
- Monitoring and alerting
- Mobile measuring

ProfiSignal



USB / LAN

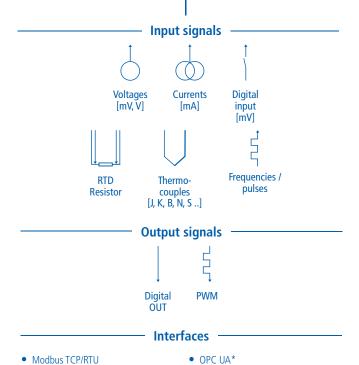

Product features

- Up to 8 universal analog inputs
- Digital inputs or switching outputs
- Very compact
- Flexible sampling rate for a wide range of applications

Sensor connection

- Universal analog inputs (mV, mA, thermocouples, optional RTD)
- Digital inputs can also be used as frequency and pulse counters
- Pluggable spring-clamp terminals
- Clear connection diagram for simple wiring

Interfaces

- LAN interface (only with Loggito Logger)
- USB interface
- Modbus TCP (optional and only with Loggito Logger)
- OPC UA* (optional and only with Loggito Logger)
- WLAN (optional and only with Loggito Logger)

Data storage (Loggito Logger only)

- 4 or 8 GB internal storage
- External storage media (USB, NAS)
- Event-triggered recording with pre and post histories
- Push function

Product highlights

- Very compact design
- Universal connection options
- High precision due to differential sensor connection
- Simple configuration
- Detachable spring-clamp terminals for easy connection
- Reliable monitoring and alerting

* HA optional 21

LoggitoLab – Compact measurement data lab




Channel variant	8 AI-RTD	8 TC	4 AI-RTD 4 TC
Analog inputs (mV, mA (passive), thermocouples, RTD)	8 (max. 4 RTD)	0	4 (max. 2 RTD)
Analog inputs (mV, mA (passive), thermocouples)	0	8	4
Digital inputs / outputs (combi)	2	2	2

Applications

- Laboratory data acquisition
- Mobile data acquisition
- School and university experiments
- Fault value recording and analysis for machines and systems
- Ad-hoc measuring of any type
- Temperature distribution measuring
- Research and development

Profisignal 20

Extendible by USB

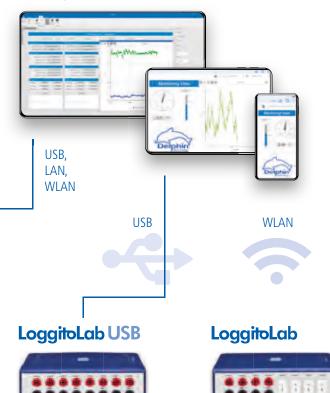






Product highlights

- Plug & Play Flexible and ready-to-use desktop device with universal analog inputs and combined digital inputs/outputs
- Optional laboratory and/or thermal-miniature sockets to easily connect any current/voltage and temperature signals
- Maximum measuring precision and resolution
- Integrated server capability to instantly visualise and analyse measurement data via smartphone or tablet*
- Versatile interfaces: LAN, USB, WLAN*, OPC UA*, Modbus TCP*
- Easy extendibility and scalability when extra channels needed
- Optional internal data memory

Connection variants for your application



Connection variant 8 AI-RTD with eight universal analog inputs to connect any voltage, current and RTD signals in 2-, 3- and 4-wire technology via 4 mm lab sockets.



Connection variant 8 TC with eight analog inputs for direct connection and high-precision measurement of any thermocouples via thermal-miniature sockets + mV, mA.



Connection variant 4 Al-RTD 4 TC for full flexibility with a combination of 4 analogue inputs with 4 mm laboratory sockets and 4 analogue inputs with thermal-miniature sockets.

All connection variants have 4 mm laboratory sockets for the digital inputs and outputs.

* optional functions 23


LogMessage 5000 – Galvanic isolation at the hig



hest level

Applications

- Potential affected measurements
- Autonomous and secure data acquisition
- Acquisition of universal sensor signals
- PC-independent measuring and testing
- Product testing, laboratories, R & D
- GPS data logging and remote monitoring
- Temperature measurement acquisition
- Mobile data acquisition for servicing

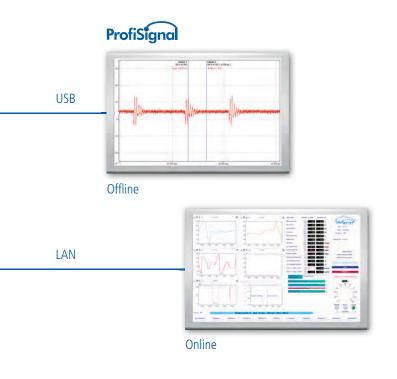

Interfaces

- Modbus TCP/RTU
- CAN RAW
- RS232, RS485
- OPC UA
 - ₩;;PC

Product features

- 16 universal analog inputs
- Sampling rates from 0.1 Hz to 60 Hz
- All analog inputs are differential
- Up to a maximum of 650 VDC isolating voltages between analog inputs
- Galvanic isolation of supply voltage and all interfaces
- No ground-loop issues
- Online calculation of measured values

Sensor connection

- Universal analog inputs (mV, mA, thermocouples, RTD)
- Clear connection diagram for simple wiring
- Screw terminals for universal sensor connection

Interfaces

- LAN, USB
- Serial interfaces RS232, RS485
- OPC UA, Modbus TCP/RTU
- CAN RAW

Data storage

- Up to 15.5 GB internal storage
- External storage media (USB, NAS)
- Event-triggered recording with pre and post histories
- Push function

- High-level galvanic isolation
- Universal connection options
- Simple configuration
- Fast connection via LAN
- Reliable monitoring and alerting
- 24-bit A/D converter

Software Channels – Flexible and **autonomous**



monitoring

		Description	Application example
	Online analysis		
f(x)	Calculation channel	Any number of channels can undergo calculations with each other, Functions include: basic arithmetic operations, trigonometry, binary and Boolean functions	Temperature difference between two input temperatures
⊸å∽	Mean-value channel	Calculates moving and triggered mean values	Mean of highly sensitive signals from thermocouples
307	Edge counter	Counter for pulses (up, down and reset function)	Energy pulses to count kWh
dt	Differentiator	Calculates changes over time	Gravimetric dosing in laboratories
<u>M</u> .	Integrator	Numerical integration over time	Calculating volumes from flow rates
Σ	Summation channel	Time-independent addition of measurement data	Totalling of analog measurement data
\cup	Linearisation	Corrective calculations for non-linear sensors	Linearisation of application-specific PTC sensors
24	Operating hours	Accumulates high-level time-points in digital signals in hours	Determining on / off time ratios for a machine
5×	Statistics	Calculates moving and triggered statistical values (min, max, variance, standard deviation)	Determining maximum values in an experiment
Ö	Stopwatch	Times between two events	Determining switching times for valves and thermal switches
	Monitoring		
<u>~</u>	Limit	Generates an event when limit values exceeded (exceeds / falls short, persistence, hysteresis bandwidth monitoring)	Alarm when a bearing temperature is exceeded
∢ ∌	Combined	Generates alarms from multiple digital input channels	Alarm from different parts of a system are combined into one message
山	Wake-up	Generates pulses according to absolute calendar times (once per day, week, month)	Determining daily production statistics
1	Status	Evaluates status information in a measurement data and generates alarms	Alarms for wire breaks in an mA signal
4	System	Displays system information (CPU load, memory utilisation)	Alarms for full data storage capacity
	Automation		
	Setpoint channel / sequencer	Automatically executes setpoint curves with reset, hold and start triggers	Automatic management of chemical processes temperatures / stirrers
	FlipFlop channel	RS, JK, D FlipFlop	Storage of digital statuses and analog data for further processing
₩.	Pulse generator	Generates cyclic pulses	Time synchronising every 15 min. Energy counter reset
<u>å</u> ©o	Logic channel	AND, OR, NOT, XOR, NOR	Boolean linking of any digital signal
(Timer channel	Functions for time elements (pick-up and drop-out delay)	Time-delayed starting of experiment procedures
χ=	Flag channel	Stores constants and parameters	Process constants and control via GUI

ProfiSignal 20 – Tried and tested functions reinven

Do you want to visualise and analyse your measurement data regardless of the platform, and effortlessly monitor and manage your processes? Then choose ProfiSignal 20, the intuitive measurement software package.

ProfiSignal 20 is a complete software package for requirements in measurement data acquisition and analysis, visualisation and process control. ProfiSignal 20 is very user-friendly and combines a versatile range of functions with top-rate operability. Regardless of whether you want to process just a few or many thousands of channels, ProfiSignal 20 is easy to understand and logically structured. Are you already familiar with ProfiSignal, the tried-and-tested measurement software? Then you can look forward to familiar functions in a new look. Many new functions as well as future-proof platform independence are also included. ProfiSignal 20 is also suitable for mobile use on tablets and smartphones. Even if you are new to ProfiSignal, you will quickly be able to use it thanks to its intuitive usability and optimised user experience.

ProfiSignal 20 is modular, scalable and available in two versions. ProfiSignal 20 Go takes you from measurement data to detailed diagrams in just a few clicks. ProfiSignal 20 Basic allows you to create complex and detailed systems and process visualisations and to effortlessly manage your processes.

Future-proof platform independence

Are you familiar with this scenario? While passing through a production facility, machine installation or test centre, you want to quickly check the current operating parameters of individual plant components or machines? This is generally difficult because not every machine is equipped with a user interface. So what can you do? Walk all the way back to the office or control room and check the parameters on the desktop PC or measurement computer there? That takes a lot of effort and is no longer necessary.

ProfiSignal 20 solves the problem with a new SCACH function. You then just need to scan an individual QR code on each machine with the camera of your smartphone or tablet, and a single measurement diagram or visualisation of the complete system will appear on your mobile device.

ProfiSignal 20's special feature is its platform independence — the same project can be made available on any end device with optimised display and operating functions according to the respective platform.



ted



Easy to visualise systems and processes

ProfiSignal 20 Go

- Acquire and store measurement data
- Visualise measurement data in online and offline diagrams
- Analyse and calculate measurement data
- Data export and printout

Profisignal 20 Basic

- Create system and process visualisations
- Operate and monitor systems and processes

- Diagrams for many different types of application
- Powerful measurement data display with quick and smooth transition between live and historical data
- Going from measurement data to diagram display in just three steps using ProfiSignal 20 Go
- System and process visualisation with no programming effort required using ProfiSignal 20 Basic
- Full platform independence optimised for desktop PCs, laptops, tablets and smartphones
- State-of-the-art interfaces and operating systems, adapted to the look and feel of the relevant platform
- Beginner and expert modes for customised use

ProfiSignal 20 Go – Quick project planning





The resulting state of process and a fall of states of a surface of the states of a surface of the states of a surface of the states of the st

Multitrack diagram

Applications

- Measurement data acquisition and storage
- Visualising measurement data in online and offline diagrams
- Measurement data analysis and calculation
- Data export and printout

- Multitrack diagrams for linking several measurement curves with the same time axis, e. g. to directly compare analog and digital signals
- SCACH function scan once to open the correct chart
- From measurement data to diagram display in just a few (mouse) clicks
- Monitoring and analysis of any measured values from a wide range of sources (hardware and software)
- Single and multi-axis y(t) diagrams with the option of simultaneous display and analysis of different measurement types
- Statistical evaluation and offline calculation functions
- Smooth zoom function from an overall view to the high-resolution µsec range
- Data export as CSV file in Diadem or WAV formats
- User-friendly recorder function for simplified test execution and batch processes

ProfiSignal 20 Basic – Monitoring and process



control



Applications

- Creating system and process visualisations
- Operating and monitoring systems and processes

- Intuitive creation of diagrams with no programming effort required
- Operating and monitoring elements already available:
 - Analogue displays, round displays, bar graph displays
 - Digital displays, signal lamps
 - Geometric objects and text fields
 - All diagram types from ProfiSignal 20 Go
 - Images
- Working copy concept enables project adjustments during ongoing operation
- Direct access to mobile device camera for installing background images
- SCACH function scan once to open the right project
- Multiple versions of the same project optimised for different device types

ProfiSignal – Intuitive **software** for measurement

Do you want to effortlessly visualise and analyse your measurement data, monitor your processes as well as create complex control systems without complex programming? ProfiSignal, the measurement technology software package, enables you to do so.

ProfiSignal is a complete software package for requirements in data acquisition and analysis, visualisation and automation. ProfiSignal is very user-friendly and combines a versatile range of functions with top-rate operability. Regardless of whether you want to process just a few or many thousands of channels, ProfiSignal is comprehensible and logically structured. Beginners can become quickly familiar with the software. ProfiSignal is modular, scalable and available in three versions: Go, Basic and Klicks. The higher level version has downward compatibility for operation, measurement files and application projects. The browser-based ProfiSignal Web is available for mobile and location-independent access to your processes.

Do you want to keep your measurement technology up to date and keep your investment safe? Keep on the safe side through rental licenses including updates and premium support.

Measurement data analysis



ProfiSignal Go	Profisignal Basic	ProfiSignal Klicks	
Data acquisition	Monitoring	Automation	
Process data acquisition and analysis	Condition monitoring of plant and machinery	Test stand automation with visualisation and operation	
Laboratory data acquisition	Operation and process data acquisition	Process control	
Start-up measurement data	Plant and machine monitoring	Test parameter and recipe management	
Fault and fault data analysis	Energy data acquisition and visualisation	Automation of measurement tasks	
Mobile and stationary data acquisition	Laboratory data acquisition and visualisation	Product development supported testing	
Trials and tests	Clean room monitoring	Service life testing	
Servicing measurements		Laboratory automation	
	·	·	

and testing technology



ProfiSignal Web

Web-based software

Condition monitoring of remote machines, systems and buildings

Mobile fault analysis

Field test installations

Weather-station and environmental measuring technology

Test drives

Maintenance and servicing

Checking inspection processes

ProfiSignal Go

- Data acquisition and storage
- Measurement data analysis and calculation
- Online and offline trends
- Data export and printout

ProfiSignal Basic

- Creation of system and process visualisation
- Operation and observing systems and processes
- Creation of basic reports

ProfiSignal Klicks

- Automation of test stands
- Programming of control procedures
- Automation of evaluation / analysis functions
- Creation of parameter views
- Creation of detailed reports with automated evaluations

ProfiSignal Web

- Location-independent access to measurement data and processes
- Mobile process visualisation and control via customisable dashboards
- Display in the browsers of any end device

- Diagrams for all applications
- Powerful measurement data display with quick and smooth transition between live and historical data
- Going from measurement data to diagram display in just three steps using ProfiSignal Go
- System and process visualisation with no programming effort required using ProfiSignal Basic
- Systems and process control with "programming by selection" using ProfiSignal Klicks
- Location and platform independent visualisation of measurement data and processes using ProfiSignal Web

ProfiSignal Go – Just a few steps to go from **sensor**



to **trend**

Applications Process data acquisition and analysis Laboratory data acquisition Measuring during system installation Fault value analysis with recorder functions Mobile and stationary data acquisition Trials and testing Measuring for servicing and maintenance

Product features

- Monitoring and analysis of any measured values
- Various diagram types for data visualisation (online / offline)
- Smooth switching from online to offline data
- ASCII export as CSV file / Trend export as vector-based EMF file
- Statistical and offline calculation functions
- Analysis using cursor functions down to μ -second ranges
- Evaluation of digital signal sequences
- Permanent storage in database format
- Recording of batch-based tests to separate files
- Alert functions via email and fax
- Display of diagram functions

Diagram types

- y(t) diagram
- y(x) diagram
- Characteristic curve diagram
- Oscilloscope diagram
- Digital logic diagram

Interfaces and options

Further information can be found on pages 46, 48.

- Simple operation from measurement data to trend
- Monitoring and analysis of any measurement data from any source (hardware and software)
- Many diagram types available
- Versatile interfaces for connecting peripherals
- Statistical evaluation and offline calculation functions
- From a general overview to high-resolution µsec ranges in just a few steps
- Direct export as CSV file or trend export as EMF file
- Up to four y-axes are possible to enable different measurement units in one diagram

ProfiSignal Basic - Visualisation and operation



made easy

Applications

- Condition monitoring
- Operational and process data acquisition
- Trials and testing
- Systems and machine monitoring
- Energy data acquisition and monitoring
- Acquisition and visualisation of laboratory data
- Clean room monitoring



ProfiSignal with a Basic visualisation

Product features

- Multiprocessing independent execution of multiple applications
- Versatile operating and monitoring functions
- Base functions for automation
- Monitoring and analysis of any measured values
- Reporting

Operating and observation objects

- Buttons, slide and toggle switches
- Input fields, dropdown lists and check boxes
- Analog and digital displays, signal lamps
- Tanks
- Tables
- Images for customised design
- Background images e.g. system schematics, drawings, photos

Diagram types

- y(t) diagram
- y(x) diagram
- Characteristic curve diagrams
- Digital logic analysis
- Oscilloscope diagram

Interfaces and options

Further information can be found on pages 46, 48.

- Intuitive creation of diagrams without programming
- Includes preconfigured operating and monitoring elements
- Optimally usable both for the monitoring of continuous processes and for batch and experiment measurements
- Basic functions for automation available
- Report generation

ProfiSignal Klicks – The **complete package** with



all options

Applications

- Test stand automation with visualisation and operation
- Creation of process controls

Product features

- Automation functions through ready-made context menus and program texts
- Creation of recipes and management of test parameters
- Versatile operating and monitoring functions
- Synchronous / asynchronous execution of multiple applications through multiprocessing
- SQL interface for database connection
- Creation of detailed, individualised reports

Operating and observation objects

- Buttons, slide and toggle switches
- Input fields, dropdown lists and check boxes
- Analog and digital displays, signal lamps
- Tanks
- Tables
- Images for customised design
- Background images e.g. system schematics, drawings, photos

Diagram types

- y(t) diagram
- y(x) diagram
- Characteristic curve diagram
- Digital logic analysis
- Oscilloscope diagram

Interfaces and options

Further information can be found on pages 46, 48.

- Complete software for visualisation, automation and operation of a full range of measuring and testing requirements
- "programming by selection" automate processes and test tasks without a programming language
- Clear structure diagram simplifies maintenance of the application
- Automatic generation of detailed, individualised reports
- SQL interface available for connecting to databases

ProfiSignal Web - Web-based visualisation and op



eration

Applications

- Field test installations
- Mobile fault analysis
- Condition monitoring of remote machines, systems and buildings
- Weather-station and environmental measuring technology
- Test drives
- Maintenance and repair
- Control of inspection processes



Product features

- Client server application for creating basic and complex process visualisations with individually created dashboards
- Running and storing data in the measuring device, local PCs, in the cloud or in a company intranet
- No installation of the web frontend required; run in a browser
- Multi-user concept; several clients can access the same project
- Control access rights and manage users

Diagram types

- y(t) diagram
- Multiple independent y-axes per diagram
- Zoom functions
- Print function

Graphical display elements

- Analog instruments as bar, circular and tachometers
- Digital displays and signal lamps
- Geometric objects (circles, rectangles etc.)

Operating and control elements

- Buttons and slide switches
- Text input fields

Interfaces


Further information can be found on page 46.

- Mobile process visualisation and control via quick to create individualised dashboards
- High-performance display of current and historical measurement data in multi-axis y(t) diagrams
- Web server installation and data storage directly in the device or on any server
- No web client installation required
- Advanced multi-user concept
- Modern design and intuitive operation

Delphin Data Center – Centralised **measurement**

How are your measurement requirements changing in the face of Industry 4.0 and IIoT? Are many of your measurement application isolated systems? Is measurement data being stored in different formats and different platforms? With the Delphin Data Center, you now have a solution which enables you to set up your own measurement data management without time-consuming and costly programming.

Cross-process data processing and analysis is often tedious and involves extensive manual effort or extensive programming work. Usually no uniform data structure exists, especially in machine parks that have developed over time. The Delphin Data Center brings together and synchronises data from different sources. The Delphin Data Center's open structure creates a central data pool to enable you to standardise, archive and monitor measurement and process data in a simple way. A wide range of applications can then be implemented for inspection requirements, life cycle testing, the monitoring of systems and machines, locally or worldwide.

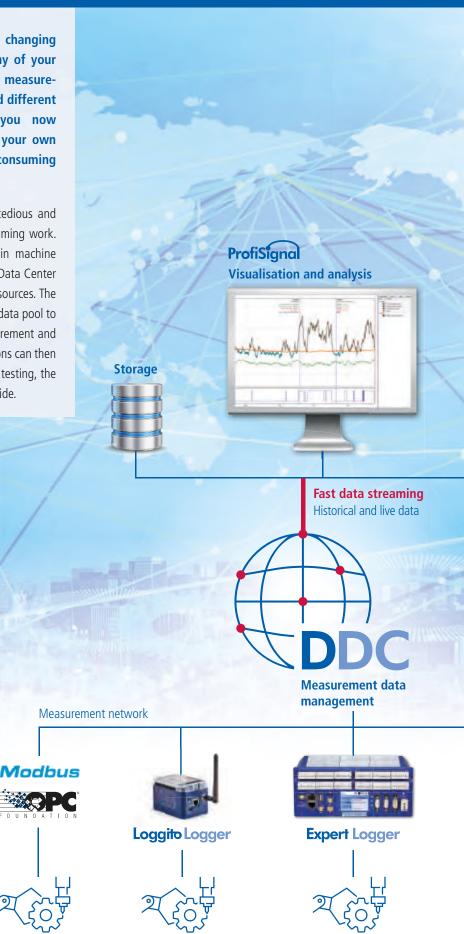

data management

Applications

- Condition monitoring of machines and systems
- Operational and process data acquisition
- Service life testing and long-term archiving
- Synchronisation of worldwide measurement / monitoring tasks
- Data standardisation and conversion
- FDA-compliant applications / clean room monitoring

ProfiSignal Web Worldwide distribution



Monitoring and alerting











Third-party hardware

OPC UA, SPS/PLC, Modbus TCP Server



Data management

- Centralised data collection from distributed sources
- Continuous and batch-based archiving
- Loss-free compression algorithms
- Lightning fast access from ms to yearly viewing
- Special data preprocessing via software channels
- Smooth transition from online to historical data
- Access via any number of clients (license packages)

Alarm management

- Create alarm conditions and rules
- Detailed alarm list with options for confirmation
- Notification by email and text messaging
- Audit trail for FDA compliant applications

User management

- Password management
- Management of user rights
- Client management

Data interfaces

- OPC DA Client / Server
- Modbus TCP Master / Slave
- **ASCII-DLL**
- API interface
- SOL interface and ODBC
- Individual drivers incl. configuration dialogs

- Easy to use, implementation without programming
- High-performance data archiving with lightning-fast access
- Loss-free data compression
- Extendible via web servers for platform-independent access
- Processing of up to 10 million data records per second

Do you want to connect external software and hardware to your ProfiSignal application, perform finished projects without a development environment, or analyse measurement files and reports offline? We have the solution.

Drivers for high-speed data transfers are available for exchanging data with third-party software and hardware. You can use ProfiSignal to connect sensors and other control and measurement systems via a variety of interfaces. An API interface enables ProfiSignal to also be integrated into higher level programming languages.

Once a ProfiSignal project has been developed, it can be easily performed with a Runtime license without the possibility to make any changes to the application. The Runtime version contains all the ProfiSignal options available in the development version.

The ProfiSignal Viewer allows you to perform offline analysis of measurement data and reports created with ProfiSignal. It is ideal when measurement data is to be analysed and exported only and no applications or online data are required.

Product highlights

ProfiSignal interfaces:

A broad range of interfaces for connecting third-party software and hardware

• ProfiSignal Runtime:

Tamper-proof execution of ProfiSignal projects


ProfiSignal Viewer:

Easy offline analysis of measurement data



Applications

- ProfiSignal interfaces: Connection of third-party software and hardware and data exchange with ProfiSignal applications
- ProfiSignal-Runtime: Performing completed ProfiSignal projects without a development environment
- ProfiSignal-Viewer: Offline analysis of measurement data and reports created with ProfiSignal

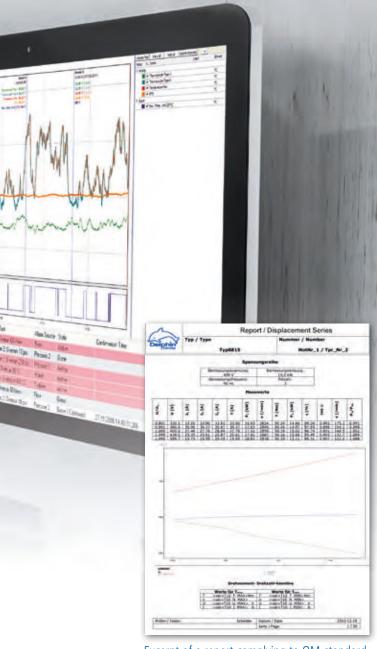

Excerpt of a report complying to QM-standard

ProfiSignal interfaces features

- Driver for high-speed data exchange with NI LabVIEW, DASYLab and Diadem
- Connection of sensors or other control and measuring systems via OPC server / client and Modbus TCP
- Integration of ProfiSignal into higher programming languages via OCX or .NET interface
- Driver for integrating third-party hardware from the following manufacturers: VXi, PSI, HBM, WinSocket and many others
- Support of the fastest transmission rates
- Compatible with the latest software versions
- Easy to install
- Good documentation

ProfiSignal Runtime features

- Tamper-proof execution of ProfiSignal projects
- Projects use only one file
- Easy duplication of the application on other PCs
- Cost-effective solution for OEM applications
- No development environment necessary

ProfiSignal Viewer features

- Offline analysis and export of measurement data offline, e.g. in ASCII format
- Offline analysis and editing of reports
- Many diagrams, e.g. trend, characteristic curves, orbit, FFT diagrams
- All diagram functions, e.g. cursor, export, flag, statistics etc.
- No rigid documents, all measurement data with time stamp included in reports
- Displaying and editing of reports
- PDF print function



Do you have a vibration measurement application or do you have special requirements regarding validation, alarm management or data exchange? Then add the relevant option to your ProfiSignal package.

The Vibro option supplements existing ProfiSignal functions with special diagrams for vibration measurement, FFT, cascade, time signal, Bode diagram, envelope as well as orbit and spectrogram.

The Audittrail / FDA option provides functions in ProfiSignal Basic or Klicks for validating monitoring applications according to the FDA 21 CFR Part 11 guidelines.

The AlarmManagement option supplements ProfiSignal Basic or Klicks with important functions for monitoring and alerting.


The SQL option connects ProfiSignal measurement data with company and product databases as well as ERP systems (only for ProfiSignal Klicks).




Alarm table

Applications

- Vibro option: Shaft vibration diagnosis and monitoring of gas / steam or hydropower turbines, compressors and drives as well as bearing vibration monitoring and roller bearing diagnosis on electric drives and rollers
- Audittrail / FDA option: Monitoring of applications requiring validation according to FDA 21 CFR Part 11 and data integrity through tamper-proof measurement databases
- AlarmManagement option: Applications with extra requirements for alarm management
- SQL option: Applications requiring connections to a company database or ERP system

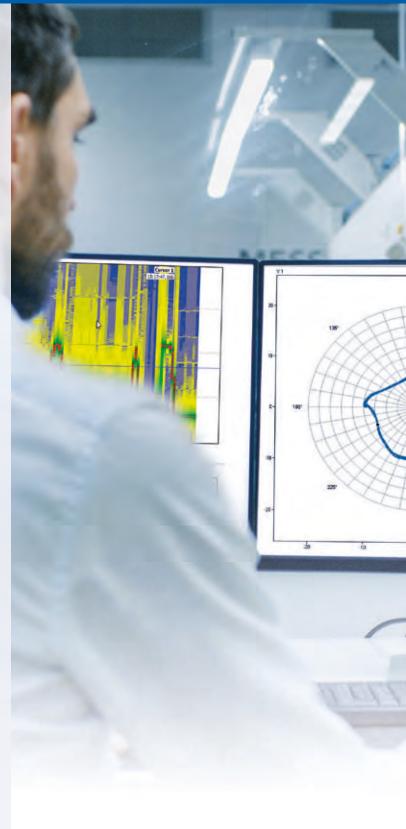

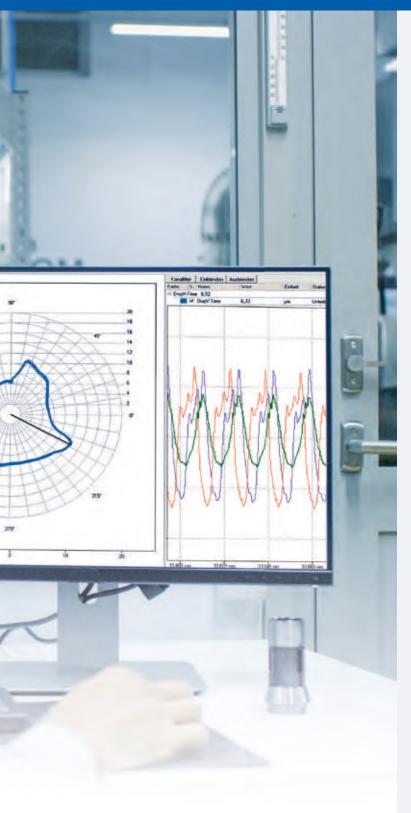

Vibro option features

- Addition to ProfiSignal of special vibration measurement diagrams time signal, orbit, shaft centerline, polar, FFT, envelope, cascade, order analysis, spectrogram and bode
- On / offline display, evaluation of data measured with Expert Vibro
- Acquisition, visualisation and analysis of process and vibration measurement data in one system
- Documentation of vibration data via a report generator with access to all special diagrams

Audittrail / FDA option features

- User management with different authorisation levels
- Integrated alarm management with rights-dependent access to alarm lists and alarm confirmations with comments only
- Redundant tamper-proof archiving of measurement data on a server as well as directly within the acquisition hardware
- Logging of user interventions (according to user management) for hardware configuration changes as well as software changes and operating control elements on a PC (Audittrail)
- Regular automatic report generation on recorded measurement data, alarm incidents and user interventions

AlarmManagement option features

- Structured creation of alarms and alarm classes
- Alarm recording with date and time, accurate to the millisecond
- Continuous logging of alarms in a separate alarm archive
- Extensive filter functions
- Analysis and access to both online and historical data with direct access to an alarm including pre- and post-alarm histories

SQL option features

- Integration of an SQL interface for data exchange with other databases, e.g. for test sample parameters
- Connection to ProfiSignal via ODBC functionality to enable reading / writing of data

Complete systems

Measuring case

The measuring case combines the advantages of Delphin's renowned measuring and testing equipment with those of mobile data acquisition. Each measuring case is made individually according to requirements. Typical applications for the measuring cases include fault data acquisition, energy data acquisition, vibration analysis, quality assurance, servicing and installation.

All Delphin measuring and testing devices are available as mobile measuring cases. The robust design of the durable synthetic and aluminium cases guarantee a high level of safety. All existing connections and interfaces are wired to a front panel with engraved labelling. The type of connections (laboratory sockets, screw, terminals etc.) can be selected as required.

- Mobile and PC-independent data acquisition
- Configurable assembly as required with analog and digital inputs and outputs
- Universal differential analog inputs for precision measurements with no transducers required
- Up to 50 kHz sampling rate per channel internal, external storage capabilities possible
- · Event-triggered storage with pre and post histories
- Simultaneous recording of vibration and process measurement data
- Remote connection of the measuring case via UMTS / LTE or internet
- Extended functions via external hardware such as power meters





19" systems / control cabinets

Special tasks in testing, measuring and automation often require special hardware solutions tailored to the specific task.

Thanks to our many years of experience in the development of solutions for specific industries and applications, we are also able to provide special systems in 19" technology and / or control cabinet solutions. Every 19" system and every control cabinet is individually constructed according to your wishes and technical requirements.

In addition to Delphin components as measuring and control equipment, other components and external devices can also be integrated into the control cabinet.



- Special solutions including hardware from a single source
- Professional design, from the mounting plate to the front panel
- Individualised connection technology
- Optional terminal or connector technology to connect sensors and actuators
- Expert engineering in the creation of your individualised assembly
- The customer approves the layouts and drawings prior to construction
- Compliance with all relevant safety standards, e.g. DIN VDE 0100, 0701, 0702
- Full functional testing

Complete systems

Universal testing device

Are you planning to perform a wide range of measurement and automation tasks, e.g. for laboratories or testing? Do you want to directly connect thermocouples, RTDs and other sensors and measure electrical AC/DC values? With the universal testing device, you have found the right solution. The device can also be used to automate testing tasks by means of switching and analog outputs. Integrated data storage enables the device to perform measurement and control tasks fully autonomously and independently of PCs.

The device is particularly suited to testing electro-technical products such as luminaires, lamps, kitchen appliances and electrical tools. Easy channel configuration using the included DataService / Configurator software means you can begin measuring within minutes.



Front and back of a universal testing device

- Operation possible from the workplace via an integrated LAN interface
- Compact design in a 19" desktop housing
- Differential and galvanically isolated universal analog inputs
- AC/DC current, voltage and power measurement
- Switching and analog outputs for automation of test procedures
- Internal data storage of up to 14 GB
- Versatile internal setpoint, calculation and logic channels
- Connection of external hardware via serial interfaces
- Various drivers available: OCX (API), OPC, LabVIEW, DASYLab





64-channel thermocouple measurement device

Are you looking for a high-precision measuring device for measuring temperatures via thermocouples? With the 64-channel thermocouple measurement device, a system has been developed to meet the multi-channel measurement requirements in research and development as well as for laboratories and test stand set-ups.

The system can be used for measurement requirements in the development of gas turbines, boilers, furnaces and combustion plants. During the development of the 64-channel device, special emphasis was placed on optimum cold junction compensation and high precision. The device is easy to configure via a LAN interface using the included DataService / Configurator software. You can then begin measuring within just a few minutes.

The entire system meets the highest security requirements through redundant data storage and archiving. If required, password protection and user management is also available.



Front and back of a 64-channel thermocouple measurement device

- 64 channels for thermocouples of types B, C, E, J, K, L, N, R, S, T, U
- Typical measuring accuracy of up to 0.2 K absolute
- 14 GB data storage for up to 70 days of autonomous operation
- Simple channel configuration using the DataService / Configurator via a LAN interface
- Upgradable to over 5,000 measuring channels by using 64-channel slave devices with the same housing type
- Secured against data loss through redundant data storage and archiving

Solutions for industries — Chemicals, pharmaceu

You know that developing a technical product today involves a multitude of tests which, on the one hand, provide quality-related information and, on the other hand, need to document compliance on safety and standards. The norms, standards and guidelines setting down the tests and evaluations that need to be performed, offer a high potential for automation. We have many years of experience in the development of industry-specific complete solutions, so we are able to offer you tailor-made solutions for your individual requirements.

Chemicals, pharmaceuticals, plastics

Setting up and testing measuring systems is not easy. The demand for preconfigured and complete measurement and test solutions is therefore high. At the same time, regulatory requirements are increasing. Measurement technology must also meet stringent specifications and are required to provide detailed proof and documentation, including full traceability.

- Hardware, software, engineering, installation and training all from a single source
- Fast and intuitive (re)configuration of measurement and test technology as well as the easy input of recipes for series tests, without requiring previous measurement technology expertise
- Easy connection to central control systems via interfaces to SQL databases, and open standards such as OPC UA
- Simple attachment of laboratory equipment from different manufacturers via a range of interfaces such as Modbus, PROFIBUS or OPC
- Tamper-proof recording of measurement data with unique time and data stamp as well as encrypted and secure data transmission and storage
- Alarm function with direct access to historical alarm data for pre and post alarm history analysis
- Detailed reporting functions for customised reports to document measurement data, alarm lists, user intervention and limit violations



ticals, plastics and mechanical engineering



Mechanical engineering

Increasingly complex systems and controls raise the demands on data acquisition and fault analysis. Systems are becoming increasingly connected and more intensively monitored with large volumes of data needing to be analysed in real time for services such as predictive maintenance. The need for intelligent measurement and test solutions and the demand for efficient complete solutions is increasing.



You can find more solutions for industries: www.delphin.com

- Turnkey systems to guarantee fast availability, optimum controllability and reliable operation
- Data acquisition and monitoring in an intelligent system with quick and easy configuration and short set-up times
- Flexibility from having diverse (fieldbus) interfaces and support for open standards such as OPC UA
- Autonomous operation guarantees reliable data acquisition and storage with time stamps, even in the event of PC or network failures
- Integrated signal conditioning in place of external transducers
- Acquisition and evaluation of measurement data, automation and visualisation of measurement procedures and processes, automated report generation — all without requiring programming expertise
- Simple creation of system monitoring with a range of alarm options as well as fault value analysis with pre and post triggering

Solutions for industries – Energy technology



Energy technology

Increasingly more people want the option of using alternative energy sources. Research and development is therefore being carried out in many places such as at test stands and in large installations. Delphin products provide precisely the functions required in energy technology and are contributing significantly to productive testing, systematic fault finding, and safe and effective process monitoring.

- Precise and fast measurement of different types of sensor signals ranging from temperatures, voltages and currents through to vibration signals
- Simple connection to control systems via various fieldbuses
- Isolation of channels, e.g. for measurements on fuel cells or batteries
- Internal data storage for autonomous measuring
- Monitoring and automation of test stand processes
- Effective evaluation also for extended time periods due to a long-term stable measurement database
- Simple to use cause analysis through precise event analysis sequencing
- Remote monitoring options for access from anywhere in the world

Heating, air-conditioning, ventilation

Heating, air-conditioning, ventilation

To comply with the statutory minimum requirements for energy efficiency and energy saving, the functions of complex-systems require reliable simulation, testing and checking right from the system development stage. Increasingly more parameters and tighter limits need to be considered. Requirements for measurement and testing are therefore also increasing considerably along with the need for higher performing measurement technology.



You can find more solutions for industries: www.delphin.com

- Flexible and precise measurement technology that can be adapted by technicians to the relevant testing requirements
- Automated processing of stored test procedures, easy selection via "one-button solutions"
- Universal inputs for sensor technology, both open and proprietary interfaces as well as standardised protocols
- Easy integration of third-party measuring equipment such as scales or gas meters
- Fast data acquisition with up to 50,000 readings per second per channel
- High-performance internal computing and monitoring functions
- Alarms via switching output, text messaging, fax or email in the event of faults or limit value violations
- Online analyses during ongoing measurements, comparison of measurement results against databases and spreadsheets



Application development

Individual and efficient

Do you need a turnkey solution for your measurement or automation requirements? We at Delphin guarantee smooth project completion, from engineering and implementation through to user training. Using Delphin products, our engineering team efficiently and cost-effectively create individualised applications. This can include configuring measuring points, visualisation in ProfiSignal Basic, system automation and protocols in ProfiSignal Klicks or complete project planning and control cabinet construction by Delphin.

Application development is based on the ProfiSignal system. You can then subsequently maintain and develop the application we have created. Our engineers have been working for years with our products and are therefore able to deliver effective and practical solutions. Benefit from our many years of experience in delivering projects for specific customer needs and choose application development from Delphin.



0

You can find more application examples online: www.delphin.com



Application development services

- Specification of your application
- Development of a complete ProfiSignal application
- Design and implementation of visualisation diagrams for operating and observing
- Creation of input masks
- Development and testing of Klicks programming
- Report layout and linking as well as reports with measurement results
- Inclusion of corporate design requirements
- Data logger configuration
- Driver development
- Integration of additional equipment such as power meters, thermostats, controllers, scales, pumps etc. via RS232, 422, 485, Ethernet, OPC
- Connection to existing database systems for accessing and storing data
- Development of special software modules
- Planning and construction of control cabinets
- Preparation of full documentation
- Software installation and configuration
- Factory acceptance tests
- Application implementation
- Support in the preparation of validation documents (DQ, IQ, OQ) and system qualification
- User training
- Servicing and maintenance

Application development

Completed projects Test stand automation – Compressor test stand

A pump manufacturer is performing automated production tests simultaneously on seven test stands. Each test stand can be started and stopped individually from a PC. The test data is exchanged with a production database via ODBC. Tests begin with parameter input. From a dropdown list, users select one of the predefined test items to determine the test sample type. Recording and storing of measurement data begins at the click of a button. A colour change in a digital display indicates which value is below and which is above the permitted range.



Completed projects Environmental simulation and service life testing – Climatic chambers

Eight refrigerators and four climatic chambers are being operated in a chemical research department. These chambers are used to store samples for simulating environmental degradation. Temperatures recorded by RTD are stored by a ProfiMessage device, with limit value parametrisation taking place on a PC. User management has been configured in ProfiSignal Klicks. Depending on rights, users can view current temperatures and trend graphs and configure limits. A written protocol is generated automatically.





Other application examples

- Complete development test stands with the input of header data and product data, test procedure programming, standards-compliant protocols and calculations, e.g. for:
 - Luminaires
 - Tools
 - Motors
 - Vehicle components
 - Boilers and heating systems
- Process visualisation with data archiving and analysis functions, e.g. for:
 - Laboratories
 - R & D applications
 - Processing plants
- Final test systems with traceable, server-based data archiving and automatic printout of protocols for specific products
- Room monitoring and alarms via email, text messaging and fax, controlled by a powerful system of user management
- Vibration monitoring of engines, generators and turbines with worldwide accessibility to measurement data

You can find more application examples online: www.delphin.com

Calibration

Precision and security

Wherever measuring devices are being used for quality-based tasks, the devices require calibration. Even the smallest measurement errors can have drastic effects on the safety of production processes and on the quality of products. During calibration, measurements are carried out on the instrument to be tested and compared with reference values. This reassures users that measurements post calibration have a specific degree of accuracy. Every measuring system produced by Delphin leaves our factory calibrated and compliant to national standards according to ISO 9001.

We provide device and system recalibration at any time post purchase. As a manufacturer, we can re-adjust for deviations (if necessary) as part of a calibration, and carry out full functional testing. This guarantees reliability and accuracy over the entire period of use. We offer calibration at Delphin's premises or directly at the place of use.

For both on-site and in-house calibration at Delphin, you receive a calibration certificate for the device that complies to national standards. You have the option of DAkkS or factory calibration.



Mobile calibration system





Calibration at Delphin

Calibration at Delphin makes sense when you have periods when you are not using the equipment. Arrange an appointment with our calibration department and send in the devices.

On-site calibration

Larger machines and systems cannot be easily dismantled for calibration. For more complex systems, there is also risks involved in transportation. We then recommend that you have your equipment calibrated on site. For this purpose, we have modern and mobile calibration equipment which allows us to calibrate directly on your system and, if necessary, also to readjust it.

Advantages of on-site calibration

- Minimal downtimes because the devices and systems remain in-house
- Measuring operations can continue because devices are calibrated one after the other
- The devices and systems are calibrated under actual ambient conditions
- Calibration takes place on an agreed date
- No effort or costs concerning dismantling, shipping and reassembly
- No transportation risks for the devices

Services

Training

Do you want to quickly and simply find out about the range of application options for Delphin measuring and testing devices and software? Or do you need support with implementing a specific application?

Then choose one of our regular basic or advanced training courses, or arrange an individual training course in which your specific questions will be dealt with according to your needs. Training can take place in the modern conference rooms at Delphin as well as at your premises.

Contact us and we will be happy to help you.

Installation

To enable you to use your Delphin system as quickly as possible, we offer system installation at your premises by our qualified service engineers. We will make an appointment with you for this purpose. Installation includes the following:

- Setting up the Delphin measuring hardware
- Setting up the ProfiSignal software
- Miscellaneous e.g. cabling work
- Operating instructions

Installation therefore includes optimal configuration of your systems and training of your personnel. This makes using our products as easy as possible.

Give us a call and we will be happy to advise you.





Rental contracts including software maintenance

Do you find that regularly checking whether your measurement technology software is up-to-date requires too much effort? Then opt for the rental variant of ProfiSignal. You can then stay up-to-date with the latest software version while also enjoying premium customer support for any queries you have.

All ProfiSignal rental licenses include the following services:

- Premium support by telephone and remote maintenance via internet with prescribed response times
- Free software updates for your ProfiSignal installation

Contact us if you require more information.

Service agreements

Does the availability of your systems have top priority for you, no matter whether you operate a production plant, supervise a research and development facility or are a service provider? Do you use, or plan to use, Delphin products for data acquisition, monitoring and control tasks?

Then invest too in a service agreement for the measuring equipment supplied by Delphin to ensure continuous functioning of your system.

Delphin service agreements include the following options:

- Premium support by telephone and remote maintenance via internet with prescribed response times
- Short, contractually agreed lead times for service calls, maintenance work and repairs
- Free software updates for your ProfiSignal installation

Request an offer tailored to the needs of your systems and facilities.

Notes





Delphin Technology AG Lustheide 81 51427 Bergisch Gladbach · Germany Phone +49 (0) 2204 97685-0 Fax +49 (0) 2204 97685-85 info@delphin.de · www.delphin.com



