

eTOP610

eTOP Series 600 HMI products combine state-of-the-art features and top performance with an outstanding design. They are the ideal choice for all demanding HMI applications including factory and building automation.

The glass projected capacitive touchscreen and the brilliant 10.1" widescreen display with resolution of 1280x800 guarantee great optical performance and are up to the most demanding user interface requirements

The JMobile software offers full vector graphic and plenty of connectivity options.



- 10.1" TFT color display, resolution 1280x800 pixel, 64K colors
- LED backlight dimmable to 0%
- Projected capacitive touchscreen. True glass design
- 2 Ethernet ports with switch function
- 2 USB Host ports
- SD Card slot
- Plug-in modules for system expansion

Highlights


The eTOP Series 600 HMI panels have been designed to run the JMobile software and are fully compatible with JMobile Studio.

- JMobile runtime included.
- Full vector graphic support. Native support of SVG graphic objects. Transparency and alpha blending.
- Full object dynamics: control visibility and transparency, move, resize, rotate objects on screen. Change properties of basic and complex objects.
- TrueType fonts
- Multilanguage applications. Easily create and manage your applications in multiple languages to meet global requirements.
- Rich set of state-of-the-art HMI features: graphical presentation of data presentation, data acquisition, alarm handling, scheduler and timed actions, recipe data storage, users and passwords, e-mail and RSS feeds, rotating menus.
- Indexed addressing and cross-reference viewer.
- Wide selection of communication drivers for factory and building automation.
- Multiple drivers communication capability.
- Remote monitoring and control. Client-Server functionality. Mobile clients supported.
- Remote maintenance and support with VNC-based functionality.
- Off-line and on-line simulation of the HMI application with JMobile Studio.
- Powerful scripting language for automating HMI applications. Includes script debugger.
- Create and print reports to printers and to file.
- Page templates to simplify application design.
- Rich gallery of symbols and objects.
- Includes PDF reader.
- Mediaplayer widget
- IP camera widget
- Optional CODESYS PLC
- Rich gallery of symbols and objects.


Technical Data

Display Type Resolution Active display area Colors Backlight Brightness Dimming	TFT 1280x800, WXGA 10.1" diagonal 64K LED 300 Cd/m ² typ. Dimmable to 0%	Environmental Conditions Operating temperature Storage temperature Operating and storage humidity Protection class	-20° to +60 °C (vertical installation) Plug-in modules and USB devices may limit max temperature to +50 °C. -20 to +70 °C 5 – 85 % relative humidity, non-condensing IP66 (front) IP20 (rear)
System Resources Operating System User memory RAM	Microsoft Windows CE 6.0 256 MB Flash 256MB DDR	Dimensions Faceplate LxH Cutout AxB Depth D+T	282x197 mm (11.10x7.80") 271x186 mm (10.67x7.32") 56+8 mm (2.20+0.33")
Operator Interface Touchscreen LED indicators	Projected capacitive -	Approvals CE DNV ATEX IECEx UL RCM	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments DNV Type Approval Certificate Zone 2/22 II 3G Ex nA IIC T4 Gc -20<Tamb<+60°C II 3D Ex tc IIIC T105°C Dc Zone 2/22 Ex nA IIC T4 Gc -20<Tamb<+60°C Ex tc IIIC T105°C Dc UL508 Listed Haz. Loc. Class I, Division 2, Groups A,B,C and D. RCM mark
Interface Ethernet USB Serial Memory Card Expansion	2 10/100 Mbit with integrated Switch 2 Host Interfaces (1x version 2.0, 1x version 2.0 and 1.1) RS-232, RS-485, RS-422, software configurable. Max 3 serial ports with optional plug-in modules. SD Card slot 2 slots for optional plug-in modules		
Functionality Hardware Real Time Clock Screen saver Buzzer	Yes, with battery back-up Yes Yes, audible feedback for touchscreen		
Ratings Power supply voltage Current consumption Fuse Weight Battery	24 Vdc (10 to 32 Vdc) 1.0 A at 24Vdc(max.) Automatic Approx 1.7 Kg Rechargeable Lithium battery, not user-replaceable		

Dimensions

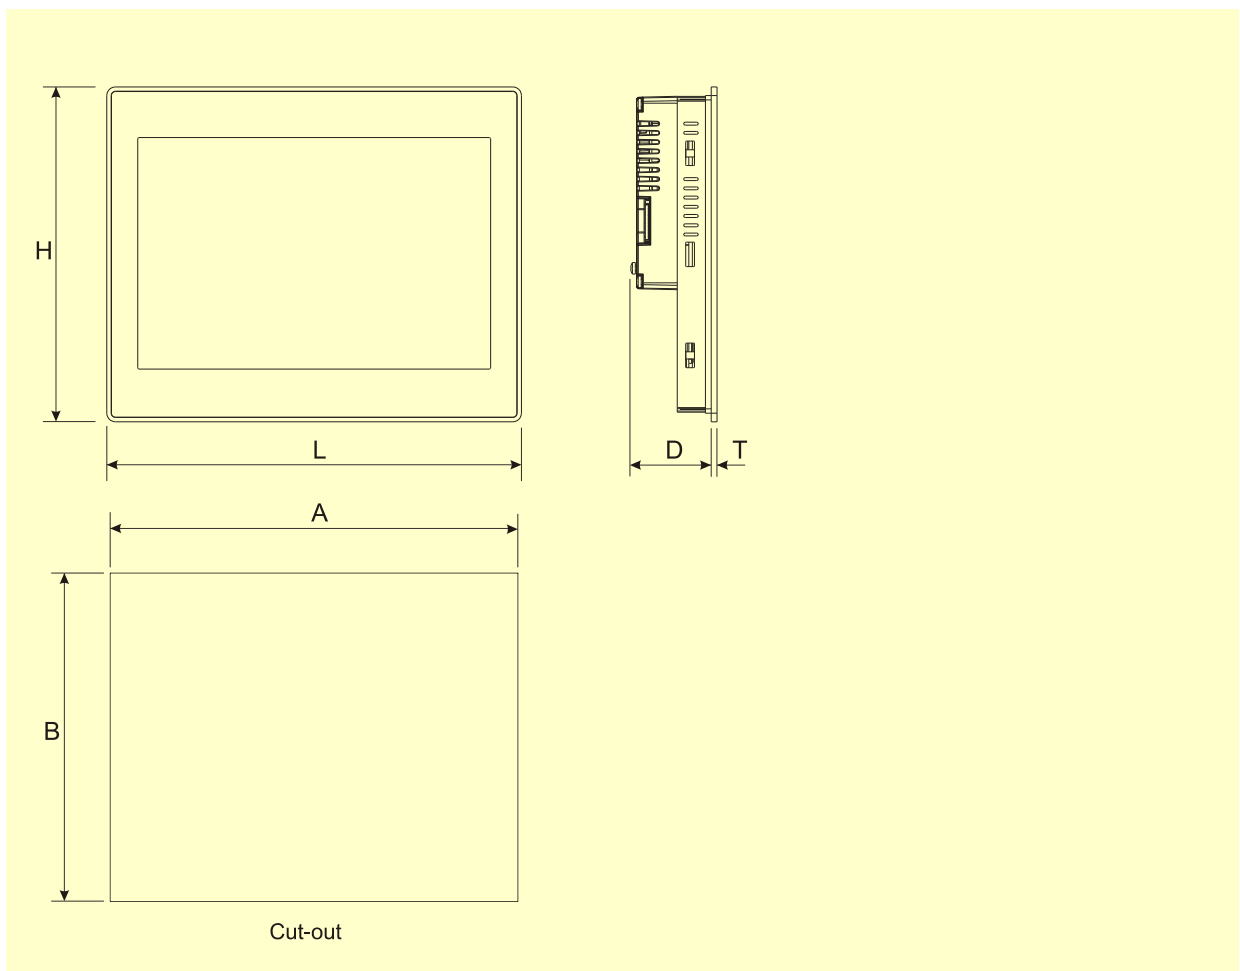

Connections

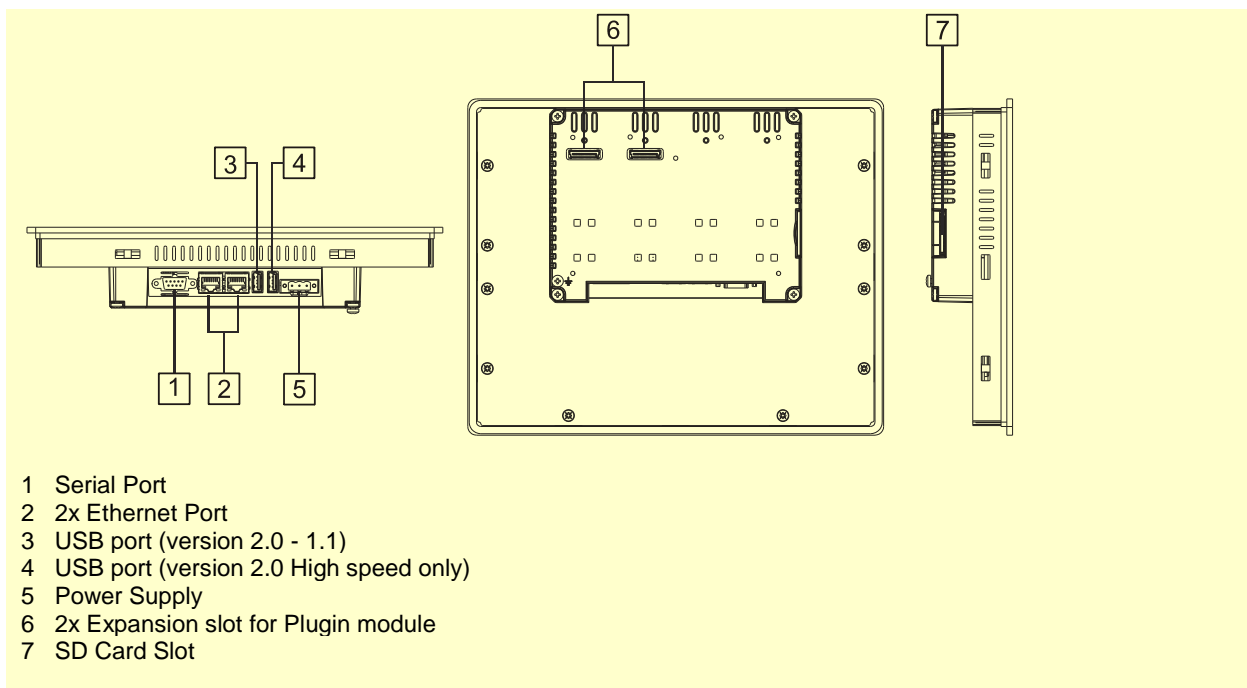

Ordering Information

Model	Part Number	Description
eTOP610	+ETOP610U5P1	10.1" widescreen TFT color with projected capacitive touchscreen. Ethernet and USB interfaces. JMobile runtime.



SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

ptn0436

Ver. 1.3

Copyright © 2015, 2016 Exor International S.p.A. – Verona, Italy

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.exorint.net