





| Model                           |            | CFO250   |
|---------------------------------|------------|--|
| Article number                  |            | 10235603   |
| No. of measurement channels     |            | 1  |
| Repeatability <sup>1)</sup>     |            | $\Delta E \leq 0.3$  |
| Color distance                  |            | $\Delta E \leq 0.6$  |
| Spectral range                  |            | 400 ... 680 nm   |
| Color spaces                    |            | XYZ, xyZ, L*a*b, L*u*v, u <sup>v</sup> L*  |
| Illuminants                     |            | D65  |
| Standard observer               |            | 2°   |
| Tolerance                       |            | Classify model; Sphere ( $\Delta E$ ); Cylinder ( $\Delta L$ , $\Delta a$ ); Box ( $\Delta L$ , $\Delta a$ , $\Delta b$ )  |
| Memory                          |            | max. 320 colors in non-volatile EEPROM with parameter sets   |
| Measuring rate                  |            | Standard 1 kHz; max. 30 kHz  |
| Output of measurement values    |            | Lab, XYZ<br>max. 500 Hz via UDP and USB<br>max. 380 Hz via RS232<br>max. 20 Hz via REST-API<br>max. 5 Hz via Modbus  |
| Temperature stability           |            | < 0.1 % FSO / K <sup>2)</sup>  |
| Light source                    |            | White light LED (425 ... 750 nm); AC operation (adjustable or OFF for primary light source, switchable via software)   |
| Permissible ambient light       |            | max. 40,000 lx (depending on the CFS sensor)   |
| Synchronization                 |            | Synchronization is possible  |
| Supply voltage                  |            | 18 ... 28 VDC  |
| Max. current consumption        |            | 500 mA   |
| Signal input                    |            | 4 inputs (IN0 - IN3): IN0 via keypad; IN0 - IN3 configurable via web page (trigger, teach, clear, lock, adjust)  |
| Digital interface               |            | RS232 (standard 9600 Baud), Ethernet, USB, Modbus (TCP/RTU) <sup>3) 4)</sup>   |
| Switching output                |            | OUT0 - OUT7 Push-Pull / NPN / PNP (max. 30 kHz, color recognition, binary coding 254 color groups)   |
| Connector                       | Optical    | Screwable fiber optic cable via FA socket M18x1, length 0.3 m ... 2.4 m, min. bending radius 18 mm)  |
|                                 | Electrical | Power/PLC: 8-pin flange connector M12A; signal: 8-pin flange socket M12A; Ethernet: 4-pin flange socket M12D (DHC-capable); USB: 5-pin flange socket M12A  |
| Mounting                        |            | DIN rail mounting/screw connection via adapter   |
| Temperature range               | Storage    | -10 ... +85°C  |
|                                 | Operation  | -10 ... +55°C  |
| Humidity                        |            | 20 % r. H. ... 80 % r. H. (non condensing)   |
| Shock (DIN EN 60068-2-27)       |            | 15 g / 6 ms in 3 axes, two directions and 1000 shocks each   |
| Vibration (DIN EN 60068-2-6)    |            | 2 g / 10 ... 500 Hz in 3 axes, 10 cycles each  |
| Protection class (DIN EN 60529) |            | IP65 (connected)   |
| Material                        |            | Aluminum, black anodized   |
| Weight                          |            | approx. 200 g  |
| Compatibility                   |            | with all CFS sensors <sup>5)</sup>   |
| Control and indicator elements  |            | Operation via keypad and web interface, visualization with 13 white LEDs   |
| Special features                |            | Multi-color teach function, automatic adjustment of the illumination brightness, measurement signal amplification and averaging depending on the measurement frequency, adjustable hold time of > 30 $\mu$ s |

<sup>1)</sup> Maximum color distance  $\Delta E$  of 1000 successive measurements of the color value of a red and a dark gray reference tile (R = 5%), measured with the CFS4-A20 sensor at 1000 Hz and brightness adjustment with a white standard (R=95%)


<sup>2)</sup> FSO = Full Scale Output

<sup>3)</sup> RS232 adjustable up to max. 115200 Baud

<sup>4)</sup> Optional connection via PROFINET, EtherNet/IP or EtherCAT via interface module

<sup>5)</sup> Also compatible with previous series (FAR, FAD, FAL, FAZ and FAS)

Dimensions:

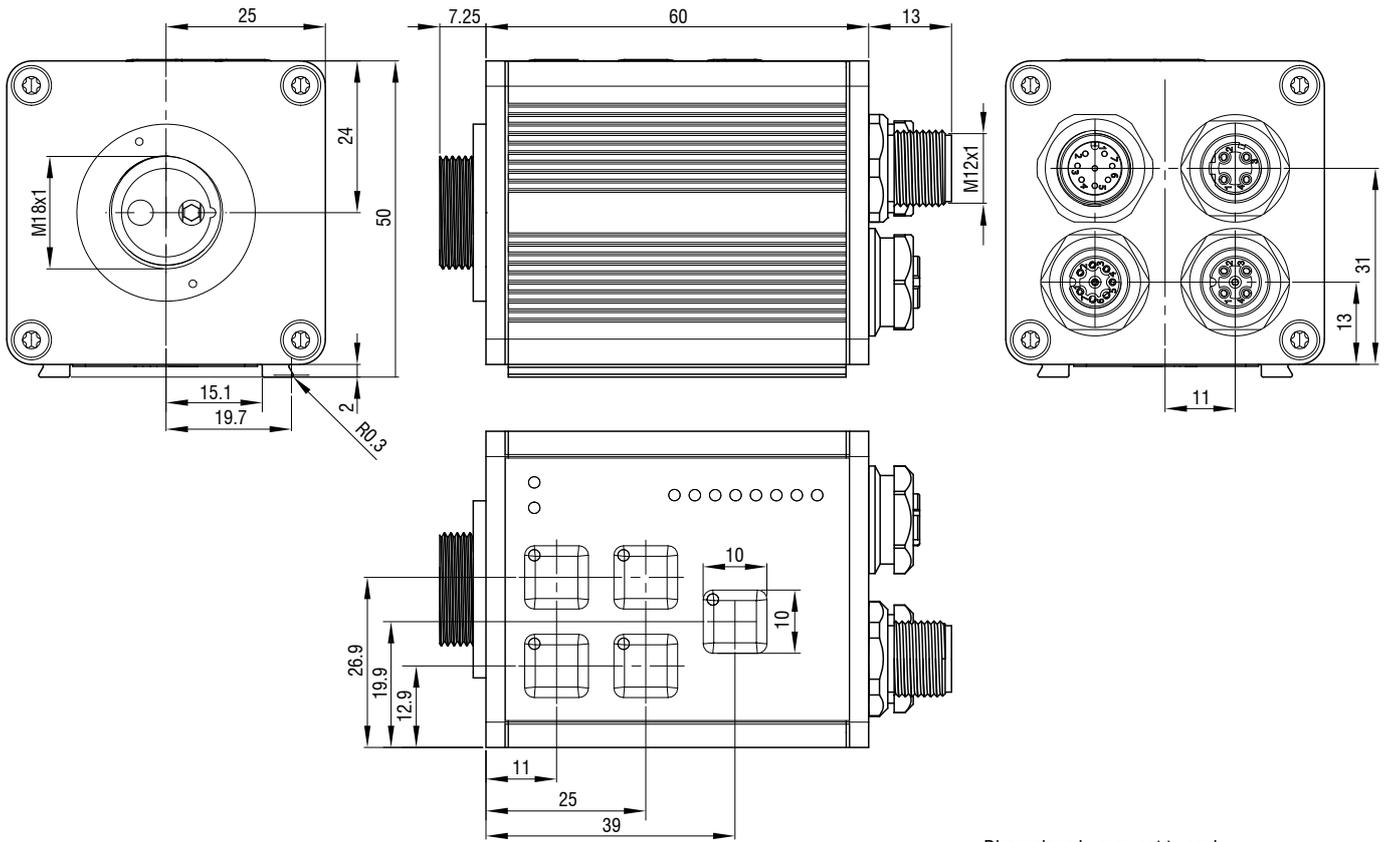

Dimensions in mm, not to scale