



SCIGATE AUTOMATION (S) PTE LTD

Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6561 0588


Email: sales@scigate.com.sg

Web: <https://scigate.com.sg/>

Business Hours: Monday - Friday 8:30AM - 6:15PM

More Precision

optoNCDT ILR // Laser-optical distance sensors


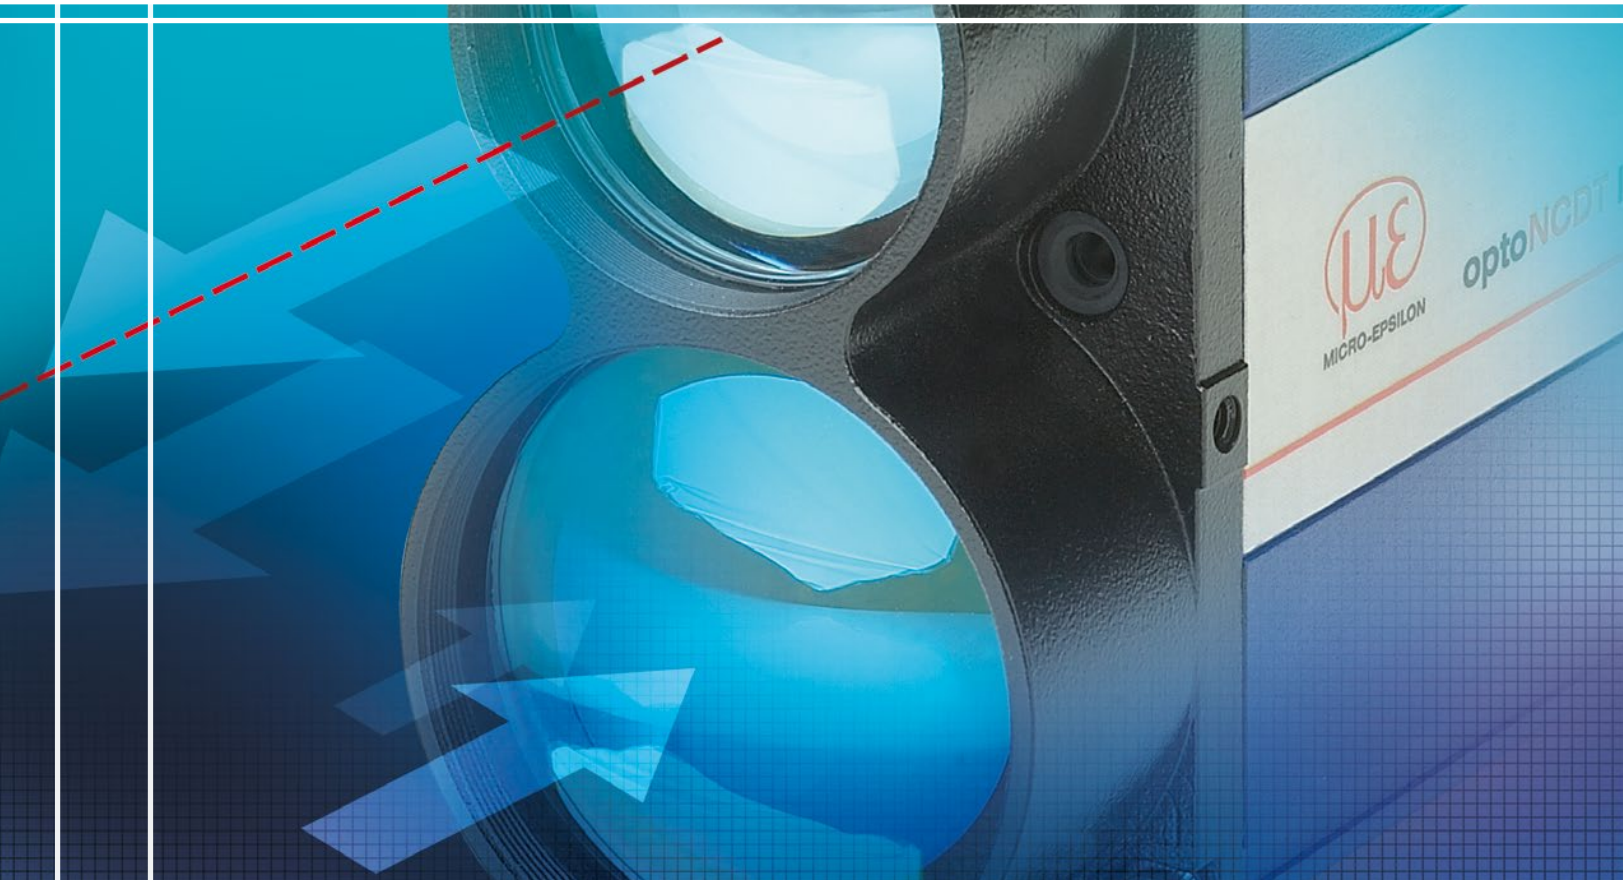




- Measuring range up to 50 m on diffuse reflecting surfaces, up to 150 m with reflector plate
- Option with integral heating
- Easy alignment with laser sighting
- Precise measurement on various surfaces
- User-friendly sensor installation
- Accessories and special models available

optoNCDT ILR118x-30 sensors are robust, optoelectronic sensors for non-contact distance measurements for industrial applications. Both sensors operate according to the phase comparison principle, whereby higher precision can be achieved. They can be easily aligned and positioned with a visible laser beam.

The optoNCDT ILR 1182 series operates with a 50 Hz measuring rate and is therefore suitable for fast processes. The mounting grooves on the housing offer flexible mounting options for many situations.

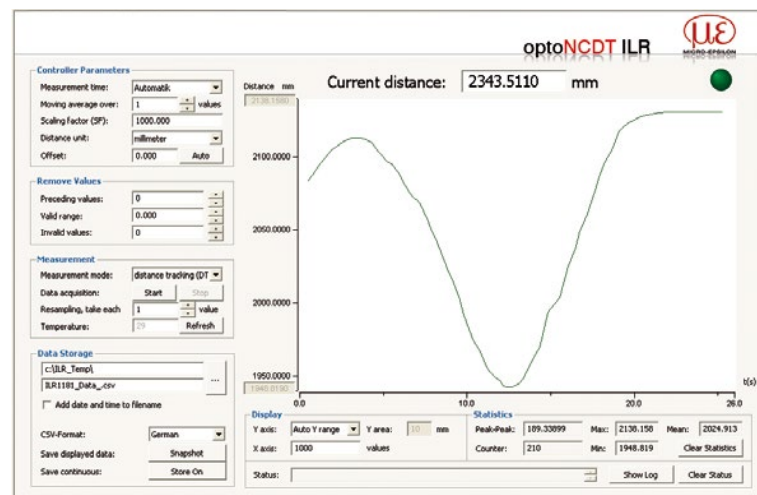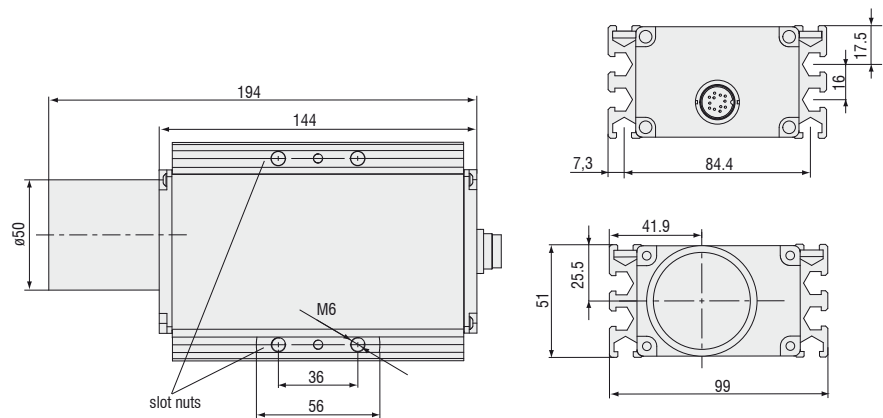

Software ILR tool for ILR118x

Model	ILR1182-30	ILR1183-30
Article number	7112008	7112009
Measuring range ¹⁾	black 6%	0.4 ... 17 m
	gray 10%	0.1 ... 30 m
	white 90%	0.1 ... 50 m
	Reflector film ²⁾	50 ... 150 m (reflective foil ILR-RF118x)
Repeatability	≤ 0.5 mm	
Resolution	0.1 mm	
Linearity ³⁾	< ±2 mm (+15 ... +30 °C); < ±5 mm (-40 ... +55 °C)	
Measurement frequency ¹⁾	50 Hz	
Light source	semiconductor laser (red 650 nm)	
Laser safety class	EN 60825-1:2014	class 2
Operating temperature	-10 ... +55 °C (optional -40 ... +55 °C, with integral heating)	
Storage temperature	-40 ... +70 °C	
Switching output	Q1 (max 500 mA)	Q1 / Q2 (max 500 mA)
Switching points	freely adjustable	
Switching hysteresis	freely adjustable	
Trigger input (not with integral heating)	adjustable trigger edge and delay, trigger pulse max. 24 V	
Serial interface	RS232 or RS422 ³⁾ adjustable, max. 38.4 kBaud	SSI interface (RS422), 24Bit, gray-coded, 50kHz ... 1MHz
Profibus ³⁾	-	Profibus (RS485) 9.6 kBaud ... 12 MBaud ⁴⁾
Operating mode	single measurement, external triggering, distance tracking, continuous measurement	
Analog output	4 ... 20 mA (16 Bit DA)	-
Temperature stability	≤ 50 ppm / °C	
Power supply	10 ... 30 VDC	
Max. power consumption	< 1.5 W at 24 V (< 24 W with heating)	< 3.2 W at 24 V (< 26 W with heating)
Connection	12-pin M16	1 x 12-pin M16 2 x 5-pin M12 B-encoded
Protection class	IP65	
Housing material	Aluminum strangeness profile, powder-coated	
Vibration/shock	500 g, 0.5 ms, 1 shock in each direction (DIN ISO 9022-30-08-1)	
	10 g, 6 ms, 1000 shocks in each direction (DIN ISO 9022-3-31-01-1)	
Weight	980 g	
EMC	complies with 2014/30/EU	
Accessories	page 10	

¹⁾ Depending on target reflectance, ambient light influences and atmospheric conditions


²⁾ Do not use reflector in close range < 25 m

³⁾ Statistical spread of 95% over the entire measuring range

⁴⁾ Sensor configuration via interface

Product identification

ILR 118x - 30 (x x)



Spot diameter ILR118x-30



ILR 1182/1183 sensors operate with a semiconductor laser with a wavelength of 650 nm (visible, red). Laser power is <1 mW. The sensors fall within laser class 2. Laser class 2 devices require no special safety precautions.

Accessories

Supply and output cable for ILR10xx series

Art. no.	Designation	
2901232	PC1000-2	Length 2 m
2901233	PC1000/90-2	Length 2 m, 90° connector
2901234	PC1000-5	Length 5 m
2901235	PC1000/90-5	Length 5 m, 90° connector
29011248	PC1000-10	Length 10 m
2901268	PC1000/90-10	Length 10 m, 90° connector

Supply and output cable ILR11xx

Art. no.	Designation	
2901524	PC1100-3	Length 3 m
2901239	PC1100/90-3	Length 3 m, 90° connector
2901573	PC1100-5	Length 5 m
2901235	PC1100/90-5	Length 5 m, 90° connector
2901236	PC1100/10	Length 10 m
2901241	PC1100/90-10	Length 10 m, 90° connector
2901237	PC1100/20	Length 20 m
2901242	PC1100/90-20	Length 20 m, 90° connector
2901238	PC1100/30	Length 30 m
2901243	PC1100/90-30	Length 30 m, 90° connector
0323241	FC1100	Cable connector
0323242	FC1100/90	Cable connector, 90° (angled)
2901551	PC1100/90-3/RS232	Length 3 m, 90° connector, RS232

Profibus


Art. no.	Designation	
2901435	PBC1100-I/O-5	Profibus input and output cable, 5 m
2901436	PBC1100-I-5	Profibus input cable, 5 m
2901437	PBC1100-I-10	Profibus input cable, 10 m
2901438	PBC1100-O-5	Profibus output cable, 5 m
2901439	PBC1100-O-10	Profibus output cable, 10 m
0323310	PBFC1100	Profibus socket
0323311	PBMC1100	Profibus plug
0323312	PBLR1100	Profibus terminating resistor

Accessories for ILR10xx series


Art. no.	Designation	
7966001	ILR-RF250	Reflector film 250 x 250 mm
7966002	ILR-R250	Reflector 250 x 250 mm

Accessories for ILR 118x / 1191 series

Art. no.	Designation	
7966014	ILR-MP1191	Mounting plate for ILR1191
7966052	ILR aligning aid for ILR1191	Aligning aid for ILR1191
7966016	ILR-PT1191	Protection tube, 100 mm for ILR1191
7966019	ILR-RF118x	Reflector film 250 x 250 mm for ILR118x
7966020	ILR-MT118x	Mounting clamp for ILR118x
7966025	ILR-MP118x	Mounting plate for ILR118x
7966021	ILR-MTN118x	Slot nuts for ILR118x
7966022	ILR-FBV118x	Air purge collar for ILR118x
7966023	ILR-PG118x	Protective glass for ILR118x
7966024	ILR-FV118x	Filter adapter for ILR118x
2213025	IF2001/USB	RS422/USB converter

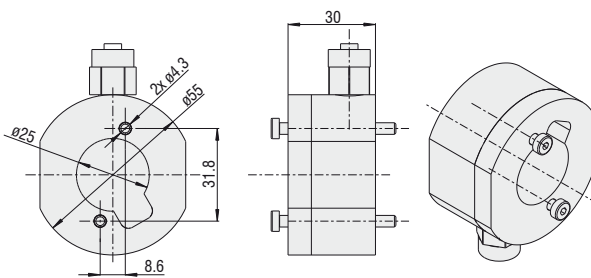

ILR-FBV118x air purge collar for ILR118x

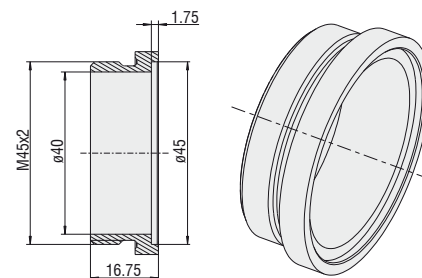


ILR-PG118x protection glass for ILR118x

Free setup and configuration software

The scope of supply includes software for easy sensor configuration. The settings can be implemented conveniently via a Windows user interface on the PC. The sensor parameters are transmitted to the sensor via the serial port and can also be saved if required. The software also contains a module which can display and store the measurement results. The sensor is connected to the PC via the sensor cable using a USB converter.

Free download

Download free of charge from www.micro-epsilon.com/download: software and driver for easy sensor integration in existing software.

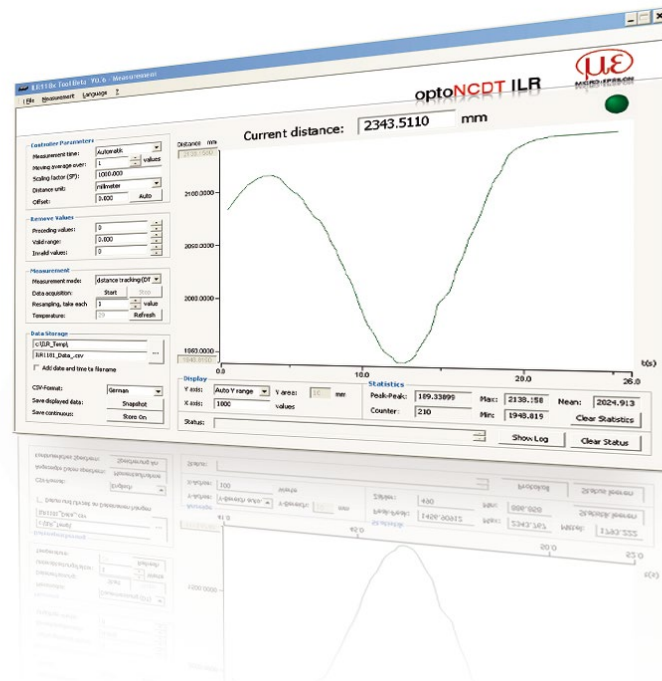


Applications




Position measurement on gantry cranes

Gantry cranes require multiple measurement tasks: Positioning of the trolley, detection and dimensioning of containers and monitoring of the minimum clearance between the cranes. The ILR1191 with a very large measuring range and low response time is designed for these measurement tasks.

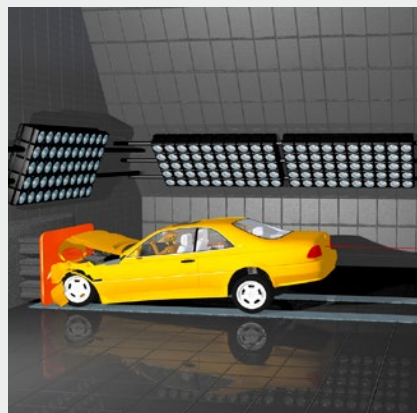


Crash test speed measurement

At acceleration of cars during crash tests, an ILR1191 measures the impact speed and deformation of the test vehicle.

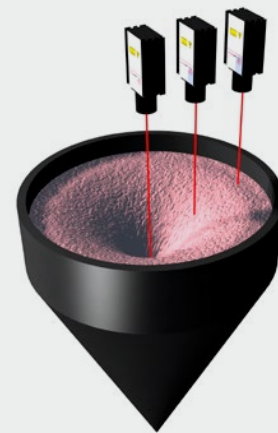

Filling level measurement in silos

Depending on the required accuracy, laser distance sensors determine the filling level of silos at up to four points. Based on these distances, the filling level is calculated.

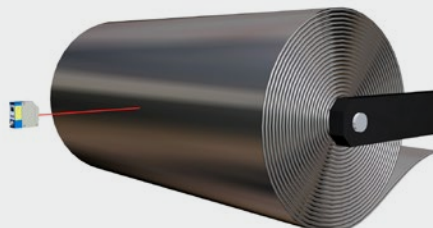

Acquisition of coil diameters

The quantity of steel wound on and off is monitored via the acquisition of coil diameters using laser probes.

Sensors and Systems from Micro-Epsilon




Sensors and systems for displacement, distance and position



Sensors and measurement devices for non-contact temperature measurement




Measuring and inspection systems for metal strips, plastics and rubber

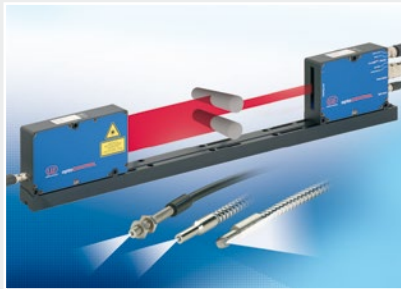

Optical micrometers and fiber optics, measuring and test amplifiers



Color recognition sensors, LED analyzers and inline color spectrometers

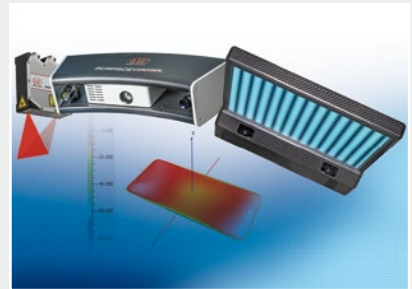

3D measurement technology for dimensional testing and surface inspection