




Pavone Sistemi
pesatura elettronica industriale

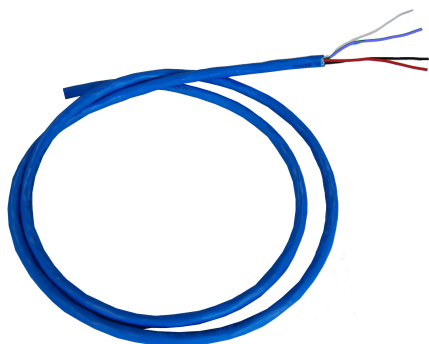

ACCESSORIES

cable j.bboxes

CAVO A 4 IN PVC

Electrical resistance section 0:35 <50,000 Ohm / km at 20 ° C

Insulation resistance:> 200 MOhm x km at 20 ° C

Mutual capacity:

Inductance:

Operating voltage: 300V

Weight: 37kg / km

Fixed radius bending pose 40mm

Operating temperature, fixed installation from -20 ° C to + 100 ° C

Reference standards: CEI 20-22 II, CEI 20-35, IEC 60332-22, IEC 60332-1, IEC 60811

Conductor:

1. Section nom.0.35mm² tinned copper
2. Composition 11x0.2mm dia. cond. 1:00

Insulation:

1. TPE-E fire retardant and halogen-low emission
2. BL / BK / RE / WH
3. Nominal diameter: 1.5mm

**SCIENCE
GATE**
Your Automation Partner



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

