




Pavone Sistemi
pesatura elettronica industriale

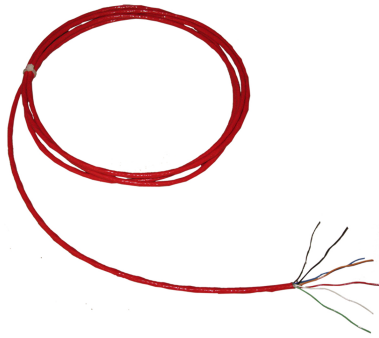

ACCESSORIES

cable j.boxes

CAVO HT

Electrical resistance: <math>< 58.8 \text{ Ohm/km}</math> at 20°C

Insulation resistance: >2000 Mohm/km at 20°C

Maximum operating voltage: 600 V

Weight: 66 kg/km

Bending radius fixed installation: 35 mm

Operating temperature Fixed installation: -70°C to +260°C

Reference standards: IEC 60673 PQA - CEI 20-51 PQA, CEI 20-35, CEI 20-22 II

Conductor:

1. nominal cross-section 0.34 mm² in nickel-plated copper
2. formation 7x0.25 mm, 0.75 mm diameter wire

Insulation:

1. teflon PFA
2. nominal diameter 1.25 mm

Formation: in pairs, red/orange, black/blue, green/white

Cabling:

1. 3 pairs roped in round composition
2. nominal diameter of 4.5 mm on the assembly

Wrapping: 23 micron polyester tape

Total shield: nickel-plated copper braid, wire diameter 0.13 mm, density of coverage >85%

Sheath east.: teflon PFA, red color, nominal diameter of 5.85 mm

**SCIENCE
GATE**
Your Automation Partner



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

