

## PLATFORMS

single cell

PME

Electronic platforms with top in stainless steel

Small and medium capacity

Accurate and robust

Standard version with approved load cell

Operation with load cell type 350 Ohm "single point" in aluminum, approved according to OIML R60 C3 (3000 divisions)

Degree of protection IP65

Structure in blue oven painted steel tubular, adjustable feet and level bubble

### TECHNICAL CHARACTERISTICS PME

Load floor: in stainless steel

Power Supply (max): 15Vdc



Shielded cable for connection to indicator

Calibration service platform with weight indicator: on request

CE-M 3000e certificate always to match with the calibration service: on request

Support column for indicator: on request



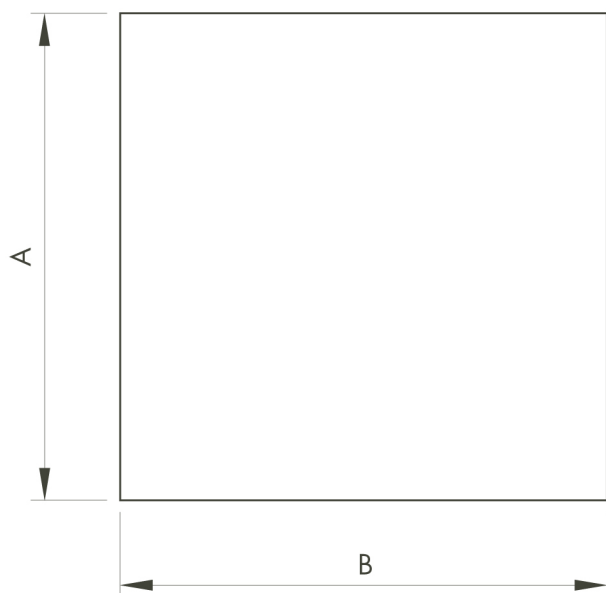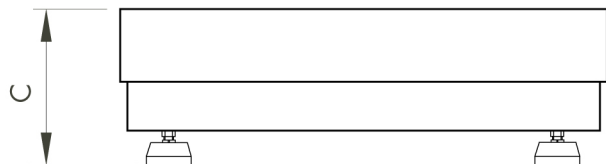

TYPE	CAPACITY (kg)	DIV. (g)	A	B	C
PME0	6-15-30	2-5-10	300	300	130
PME1	30-60-150	10-20-50	400	400	140
PME2	60-150-300	20-50-100	600	600	150
PME3	300-600	100-200	800	800	165



**SCIGATE AUTOMATION (S) PTE LTD**

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

