

PLATFORMS

monoblock

PQM

Structure in painted steel

Painted steel on load floor (4 mm thick)

Capacities from 300 to 3000 Kg

Also available in STAINLESS STEEL

OIML certified Shear beam load cells, nickel-plated steel with IP67

ABS junction box with protection IP67



Support 4-jointed feet, and height-adjustable in nickel-plated steel

Possibility of EC approval-M3000e

TECHNICAL CHARACTERISTICS PQM

Trasduttore input voltage:	3 ÷ 15 Vdc
Rated load (R.L.):	300 ÷ 3000 Kg
Rated output (R.O.):	3 mV/V
Combined error:	0.04% R.O.
Safe overload:	150% of R.L.



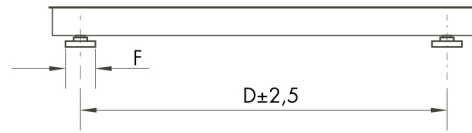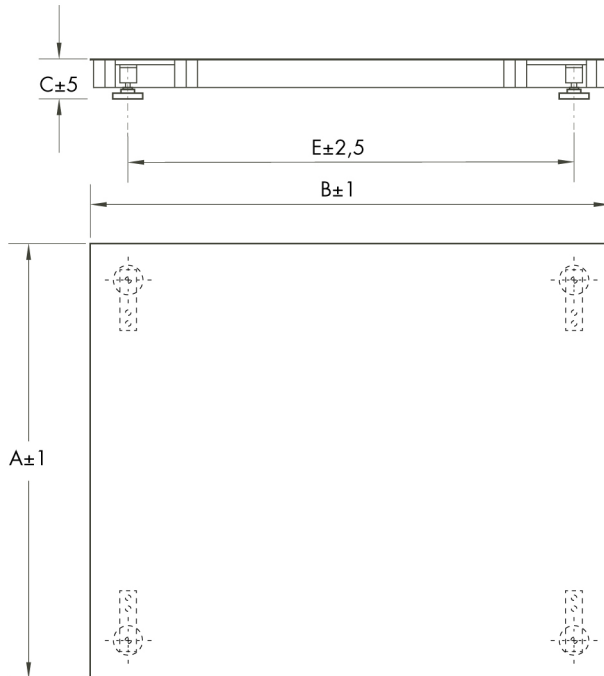

TYPE	CAPACITY	A	B	C	D	E	F
PQM0	300-600	800	800	100	690	690	60
PQM1	300-1500	1000	1000	100	890	890	60
PQM2	300-3000	1000	1250	100	890	1140	60
PQM3	300-3000	1250	1250	100	1140	1140	60
PQM4	600-3000	1250	1500	100	1140	1390	60
PQM5	600-3000	1500	1500	100	1390	1390	60
PQM6	600-3000	1500	2000	100	1390	1890	60



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

