

## General information

PVS27920191003

The UWT 6008 Analog weight transmitter has been designed by Pavone Systems. This weight transmitter is a unique product since it is suitable to all industrial applications where it is necessary to know the load distribution on the different cells. The UWT 6008 Analog is able to monitor all load cells and generate alarms due to excessive cell signal drift, missing connections, failures in load cells and unbalanced weight distribution. The emulative control allows the weighing system to work even when a load cell is broken, until its replacement. The Software Optimization is given for free. This Software allows you to run certain activities such as calibration or monitoring directly from your computer. The Optimization software is provided by Pavone Systems and guarantees a perfect instrument run.



Software Optimization 1.3.12: [optimization\\_weighing\\_software.zip](#)

Technical Manual: [uwt-6008\\_en.pdf](#)

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).



**SCIGATE**  
Your Automation Partner



**SCIGATE AUTOMATION (S) PTE LTD**

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: [sales@scigate.com.sg](mailto:sales@scigate.com.sg)

Web: [www.scigate.com.sg](http://www.scigate.com.sg)

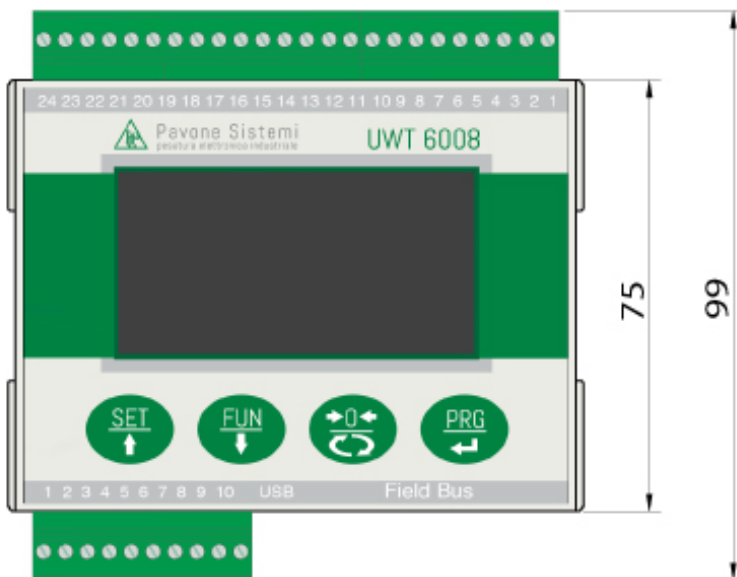
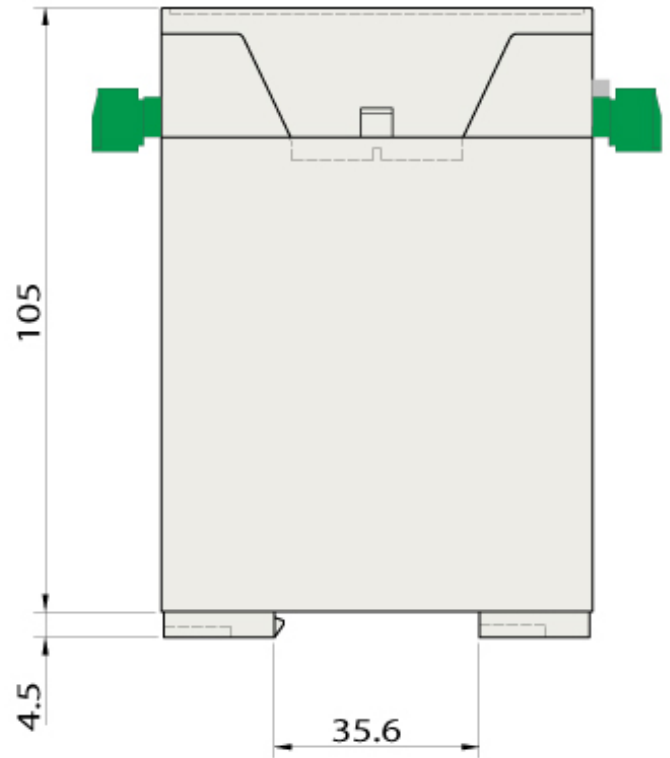
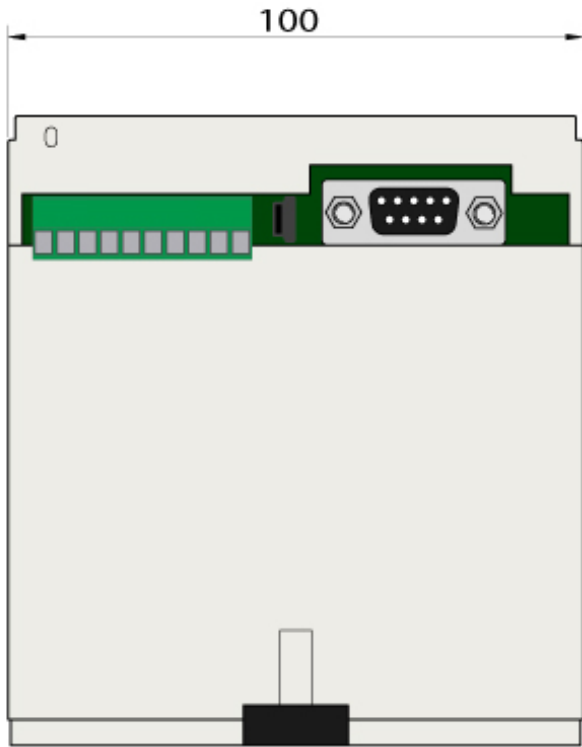
Business Hours: Monday - Friday 8.30am - 6.15pm

## Technical specifications

PVS27920191003

<b>Measuring range:</b>	-3.9 ÷ +3.9 mV/V
<b>Input sensitivity:</b>	0.02 µV/count
<b>Full scale non-Linearity:</b>	<0.01%
<b>Gain drift:</b>	< 0.001% FS/°C
<b>Display:</b>	128 x 64-pixel graphic LCD
<b>A/D Converter:</b>	24 bits
<b>Internal Resolution:</b>	> 16.000.000 points
<b>Transducer input voltage:</b>	5 Vdc (230 mA max.)
<b>Frequency signal acquisition:</b>	12.5 ÷ 300 Hz
<b>Visible resolution (in divisions):</b>	999999
<b>Divisions value (adjustable):</b>	x1, x2, x5, x10, x20, x50
<b>Decimal figures range:</b>	0 ÷ 4
<b>Temperature range:</b>	-10 ÷ + 50°C (humidity max 85% no condensation)
<b>Storage temperature:</b>	-20 ÷ +70°C
<b>Filter:</b>	5 ÷ 250 Hz
<b>Logic output:</b>	2 relays, Max. 48 Vac/Vdc, 2A each
<b>Logic input:</b>	2 opto-isolated at 12/24 Vdc PNP (external power supply)
<b>Serial port:</b>	1 USB device + 1 RS232C + 1 RS485
<b>Analog output Non-Linearity:</b>	< 0,02%
<b>Temperature drift analog output:</b>	0,001% FS / °C
<b>Power supply:</b>	12-24 Vdc ±15% - Power consumption 4 W
<b>Microcontroller:</b>	ARM Cortex M0+ at 32 bits, 256KB Flash reprogrammable on-board from USB
<b>Data storage:</b>	64 Kbytes expandable up to 1024 Kbytes
<b>Regulatory compliance:</b>	EN61000-6-2, EN61000-6-3 for EMC; EN61010-1 for Electrical Safety, EN45501 for metrology
<b>Number of load cells:</b>	1 ÷ 8
<b>Analog output:</b>	16-bit opto-isolated Voltage: 0 ÷ 5/10 V (min. R: 10 K Ohm), Current: 0/4 ÷ 20 mA (max. R: 300 Ohm).
<b>Dimensions:</b>	100 x 75 x 110 mm (L x H x P)

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

**Weight Transmitter UWT 6008 Analog**


All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).