

orbit LTM

A precision non-contact laser for Gauging

Description

Solartron Metrology, the world leader in linear measurement innovation, has now added another performance sensor to its line-up. Orbit LTM is a Laser Triangulation unit for precision measurements, with 0.04% F.S. reading over 2 or 10 mm measurement ranges.

Its advantages include:

- Auto Gain Circuitry: The unit automatically adjusts the power to the laser based on feedback from the material, providing better readings on more difficult surfaces
- Gap Time: If you are checking a surface with gaps or holes that could throw off data, the laser has a bridging function where you can program the laser to account for those dropoffs. Your data is then less likely to be skewed.
- Diffuse or Specular modes: Instead of purchasing a separate unit for Diffuse or Specular applications, the laser can switch between the two different modes, depending on the material. For Specular Mode, the laser must be tilted to 22.5 degrees from the perpendicular axis (2 mm) or 15.8 degrees (10 mm).

Features

2 mm and 10 mm ranges

Up to +/- 0.03% F.S. Accuracy

Up to 0.24 μm resolution


40 kHz sampling speed and up to 4 kHz output

Laser Beam Control – the beam can be switched off allowing multiple lasers to measure points very close together where beam interference could occur. In the beam off mode the laser head remains powered so that readings can quickly be taken after turning the beam on.

Plugs into Orbit®3, network up to 150 sensors with full control. The laser functions via the Orbit®3, interface using Ethernet, Modbus, USB or RS232. The LTM can also be used with the Orbit®ACS products (with integral display) where control is via the menu or via Orbit® ACS Modbus interface




Product Applications

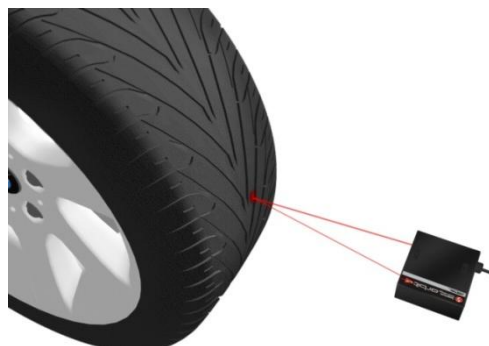

Precision. Quality. Reliability

www.solartronmetrology.com • sales.solartronmetrology@ametek.com


Product Applications

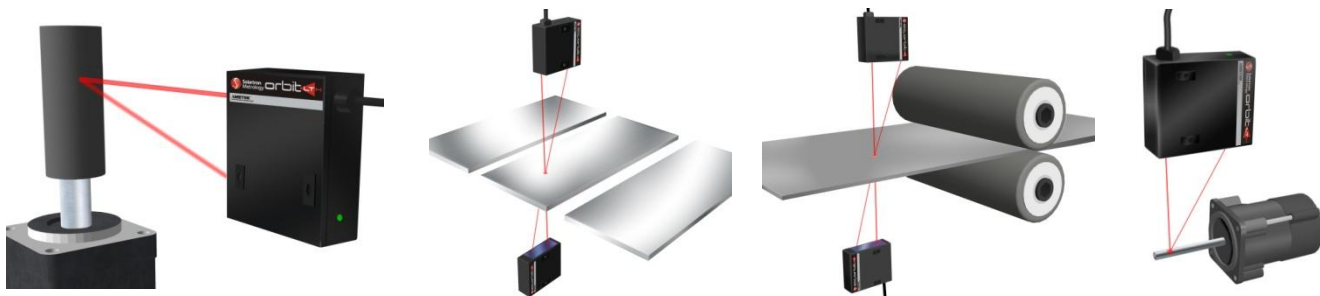

Indicator Light to show when in range



Gap Time Feature

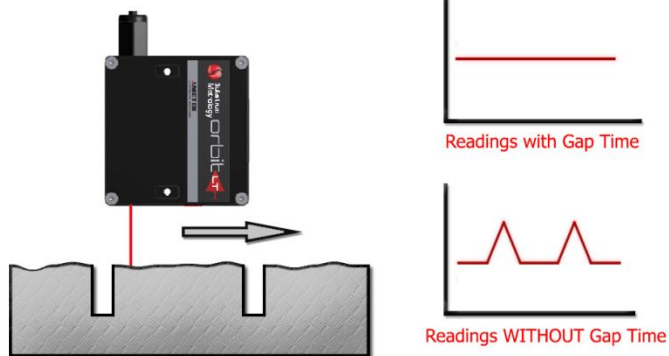

Diffuse Mode



Specular Mode (for reflective surfaces)




Technical Specification		
	LTMD/2/B	LTMD/10/B
Measurement Range (mm)	2	10
Offset Distance (from laser to start of measurement Range) (mm)	24	45
Reference Distance (from laser to centre of measurement Range) (mm)	25	50
Spot size (diameter μm)	30	25
Linearity (1) ($\pm\%$ FSO)	0.03	0.04
Linearity (1) ($\pm\mu\text{m}$)	0.6	4
Repeatability (2) (μm)	0.4	0.6
Resolution (μm)	0.24	0.3
Max Sampling Frequency (kHz)	40	
Output frequency	Up to 4kHz (via Orbit [®] 3 network)	
Sampling Cycles	256/512 μs	
	or	
	1/2/4/8/16/32/64 ms	
Working Bandwidth (Hz)	1300, 650, 325, 163, 81, 40, 20, 10, 5	

(1) Measured on white photographic paper with the laser sample rate at 4 kHz and averaging 16 cycles

(2) Measured on white photographic paper with the laser sample rate at 4 kHz and averaging 16 cycles, with the laser beam broken between readings

*Laser can be calibrated to surface you intend to measure. Please contact your local Solartron representative for details.

Dimensional Drawing

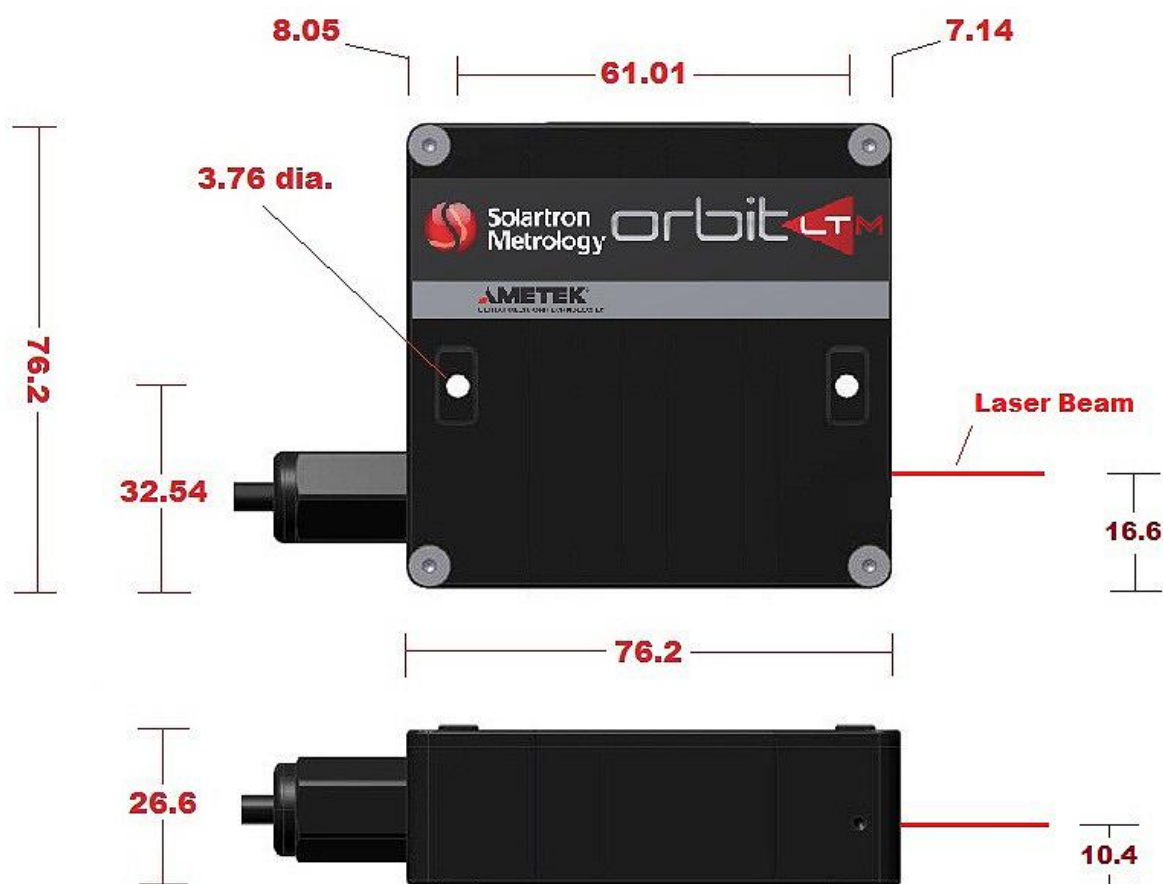

For 3D drawings, please contact sales.solartronmetrology@ametek.co.uk

United Kingdom - Head Office

Solartron Metrology
Steyning Way
Bognor Regis
West Sussex
PO22 9ST
Tel: +44 (0) 1243 833333
Fax: +44 (0) 1243 833322
[Sales.solartronmetrology@ametek.com](mailto:sales.solartronmetrology@ametek.com)

France

Solartron Metrology
Rond-point de l'Espine des Champs
Buroplus - Bat. D
Elancourt 78990
Tel: +33 (0)1 30 68 89 50
Fax: +33 (0)1 30 68 89 59
france.solartronmetrology@ametek.com

Germany

Ametek GmbH
Solartron Metrology Division
Rudolf-Diesel-Strasse 16
40670 Meerbusch
Tel: +49 (0) 2159 9136 500
Fax: +49 (0) 2159 9136 505
vertrieb.solartron@ametek.de

India

Ametek Instruments India Private Limited
1st Floor, Left Wing
Prestige Featherlite Tech Park
Plot #148, EPIP II Phase
Whitefield, Bengaluru 560 066
Karnataka, India
Tel: +91 80 6782 3200
Fax: +91 80 6782 3232

USA

Solartron Metrology
USA Central Sales Office
915 N. New Hope Road, Suite C
Gastonia, NC 28054
Tel: +1 800 873 5838
Fax: +1 704 868 8466
usasales.solartronmetrology@ametek.com

China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd
No. 155 Puhui Road
Ju Ting Economic Development Zone
Shanghai 200131
Tel: +86 21 5763 2509
Fax: +86 21 5866 0969 Ext. 261/262
china.solartronmetrology@ametek.com



Solartron Metrology

Precision Driven

Offices worldwide
Agent and distributor details
available at
www.solartronmetrology.com



Q09540

Solartron pursues a policy of continuous development. Specifications in this document may therefore be changed without notice.

Datasheet 52624
Issue 61
EDCR20423

AMETEK®
ULTRA PRECISION TECHNOLOGIES

SCIENCE GATE
Your Automation Partner



SCIGATE AUTOMATION (S) PTE LTD

No. 1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

Precision. Quality. Reliability

www.solartronmetrology.com • sales.solartronmetrology@ametek.com