

# Optimum Series

Narrow bodied high performance displacement sensors

## Description

The Optimum Series of LVDT sensors is an ideal choice for process control and research applications. The free core variants are designed for precise linear positioning and measurement of moving parts where zero friction and hysteresis is required within a restricted space.

The free core version is available with an optional lightweight core for mounting on to small, rapidly moving structures without affecting their performance and integrity, which is important in some control applications.

A version of a lightweight core with a 1.9 mm diameter is available which improves core to bore clearance, making alignment easier. A light titanium core carrier can be supplied on request.

The optimum is also available as a guided product and with universal joints either as an LVDT or digital product for use in applications where it is not possible to mount the core and carrier on the moving part.

## Features

- Good measurement range to body length ratio
- Small body diameter
- Larger radial bore clearance
- Rugged construction
- High temperature (200 °C) available on request
- High pressure (vented case) available



**Precision. Quality. Reliability**

[www.solartronmetrology.com](http://www.solartronmetrology.com) • [sales.solartronmetrology@ametek.com](mailto:sales.solartronmetrology@ametek.com)

## Technical Specification

### Generic Product Types

LVDT	OP1.5	OP6	OP10	OP12.5	OP25
Digital Output (Orbit)	DO3	DO12	DO20	DO25	DO50

### Measurement

Measurement Range LVDT (mm)	±1.5	±6	±10	±12.5	±25
Measurement Range ORBIT (mm)	3	12	20	25	50
Linearity (% FSO)	<0.25	<0.25	<0.25	<0.25	<0.25
Resolution µm (Note 1)	<0.10	<0.10	<0.10	<0.20	<0.40
Pre-travel ±0.5 mm (Guided Versions only)	1.78	1.53	1.53	2.33	2.10
Post Travel ±0.5 mm (Guided Versions only)	1.20	1.67	1.67	2.47	2.30
Temperature Coefficients (%FSO/°C) LVDT	<0.05	<0.05	<0.05	<0.05	<0.05
Temperature Coefficients (%FSO/°C) DC/4-20mA	<0.07	<0.07	<0.07	<0.07	<0.07
Tip Force ±20% (Horizontal at middle of range) N	0.66	0.94	0.94	0.93	0.50

### Mechanical

Nominal Mass (g) LVDT	7	12	12	20	20
Nominal Mass of Core (g)	1.5	2.5	2.0	3.5	4.0
Body diameter (mm)	9.52				
Case material	400 Series Stainless Steel				
Core material	Nickel Iron				
Cable Standard Type/Length (m) (Note 2)	F.E.P. / 3 Style A or B				

### Electrical Interface (LVDT)

Energising Voltage (Vrms) at 5 kHz	1-5				
Energising Current at 5kHz (mA/V)	6.0	4.5	3.2 <sup>(3)</sup>	7.0	1.25
Sensitivity at 5kHz ±5% mV/V/mm	108	78	85 <sup>(3)</sup>	67	25

### Electrical Interface (ORBIT)

Bandwidth	Up to 460 Hz (selectable)				
Output	Solartron Orbit				
Power (VDC)	5±0.25 @ 0.06A				
Sealing (Orbit Module)	IP43				

### Environment

Operating Temperature (°C)	-40 to +150				
Storage Temperature (°C)	-40 to +150				
Sealing	Splash Proof				

**Note 1:** Resolution specification is only applicable to ORBIT digital transducers.

The resolution of LVDT transducers is effectively infinite and is only limited by the conditioning electronics


**Note 2:** Cable Style A comprises of individual twisted cores , Style B comprises a sheathed and screened cable

**Note 3:** OP10 at 20 kHz

## OP Series Dimensions



### Free Core

Type	A	B	C (at Null)
OP1.5	20.60	11.00	4.80
OP6	46.50	28.40	9.05
OP10	46.50	20.40	13.05
OP12.5	83.50	50.80	16.35
OP25	83.50	26.00	28.75

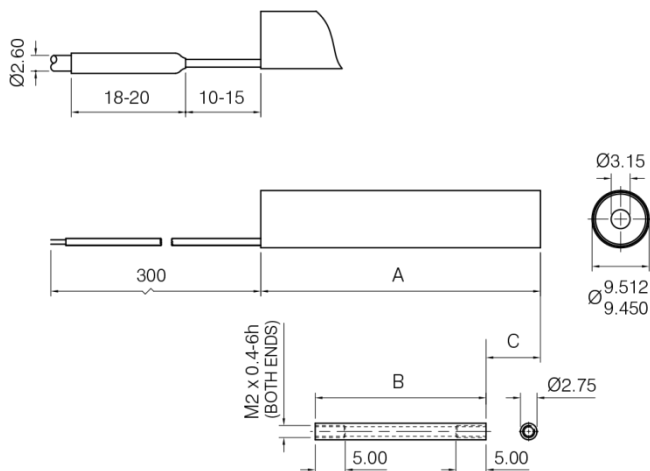

### Guided Core & Universal Joints

Type	A	B (at Null)
OP1.5	20.60	14.00
OP6	46.50	20.90
OP10	46.50	29.40
OP12.5	83.50	31.50
OP25	83.50	48.65

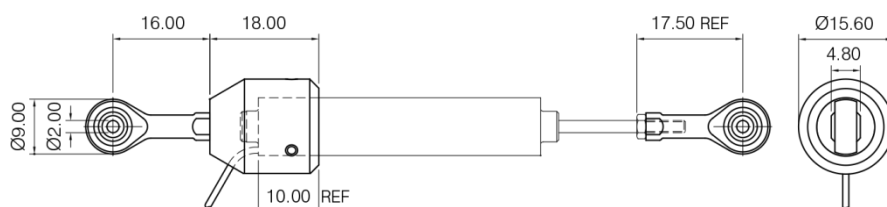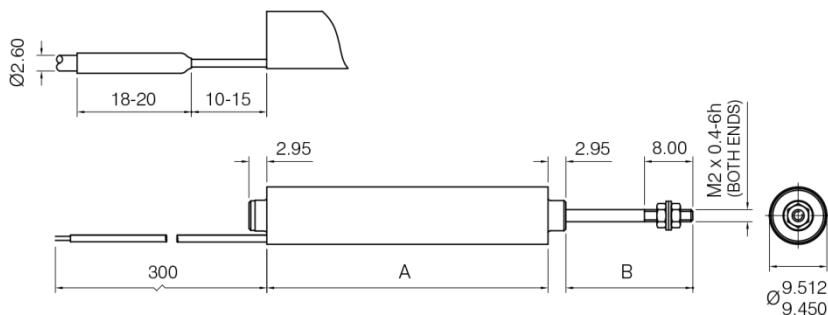

For 3D drawings, please contact [sales.solartronmetrology@ametek.co.uk](mailto:sales.solartronmetrology@ametek.co.uk)

**United Kingdom - Head Office**

Solartron Metrology  
Steyning Way  
Bognor Regis  
West Sussex  
PO22 9ST  
Tel: +44 (0) 1243 833333  
Fax: +44 (0) 1243 833322  
[Sales.solartronmetrology@ametek.com](mailto:Sales.solartronmetrology@ametek.com)

**France**

Solartron Metrology  
Rond-point de l'Espine des Champs  
Buroplus - Bat. D  
Elancourt 78990  
Tel: +33 (0)1 30 68 89 50  
Fax: +33 (0)1 30 68 89 59  
[france.solartronmetrology@ametek.com](mailto:france.solartronmetrology@ametek.com)

**Germany**

Ametek GmbH  
Solartron Metrology Division  
Rudolf-Diesel-Strasse 16  
40670 Meerbusch  
Tel: +49 (0) 2159 9136 500  
Fax: +49 (0) 2159 9136 505  
[vertrieb.solartron@ametek.de](mailto:vertrieb.solartron@ametek.de)

**Brazil**

Ametek do Brasil, Ltda  
Rod. Eng Ermenio de Oliveira Penteado, Km 57, SP75  
Bairro Tombadouro  
13337-300, Indaiatuba, SP, Brazil  
Tel: +55 19 2107 4126

**India**

Ametek Instruments India Private Limited  
1st Floor, Left Wing  
Prestige Featherlite Tech Park  
Plot #148, EPIP II Phase  
Whitefield, Bengaluru 560 066  
Karnataka, India  
Tel: +91 80 6782 3200  
Fax: +91 80 6782 3232

**USA**

Solartron Metrology  
USA Central Sales Office  
915 N.New Hope Road, Suite C  
Gastonia, NC 28054  
Tel: +1 800 873 5838  
Fax: +1 704 868 8466  
[usasales.solartronmetrology@ametek.com](mailto:usasales.solartronmetrology@ametek.com)

**China**

AMETEK Commercial Enterprise (Shanghai) Co. Ltd  
No. 155 Puhui Road  
Ju Ting Economic Development Zone  
Shanghai 200131, China  
Tel: +86 21 5763 2509  
Fax: +86 21 5866 0969 Ext. 261/262  
[china.solartronmetrology@ametek.com](mailto:china.solartronmetrology@ametek.com)



**Solartron  
Metrology**

*Precision Driven*

Offices worldwide  
Agent and distributor details  
available at  
[www.solartronmetrology.com](http://www.solartronmetrology.com)



Q09540

Solartron pursues a policy of continuous development. Specifications in this document may therefore be changed without notice.



**SCIGATE AUTOMATION (S) PTE LTD**

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: [sales@scigate.com.sg](mailto:sales@scigate.com.sg)

Web: [www.scigate.com.sg](http://www.scigate.com.sg)

Business Hours: Monday - Friday 8.30am - 6.15pm

**AMETEK®**  
ULTRA PRECISION TECHNOLOGIES

**Precision. Quality. Reliability**

[www.solartronmetrology.com](http://www.solartronmetrology.com) • [sales.solartronmetrology@ametek.com](mailto:sales.solartronmetrology@ametek.com)