



SCIGATE AUTOMATION (S) PTE LTD

No 1 Bukit Batok Street 22 #01-01 Singapore 659592


Tel: (65) 6561 0488

Fax: (65) 6561 0588


Email: sales@scigate.com.sg

Web: https://scigate.com.sg/


Business Hours: Monday - Friday 8:30AM - 6:15PM

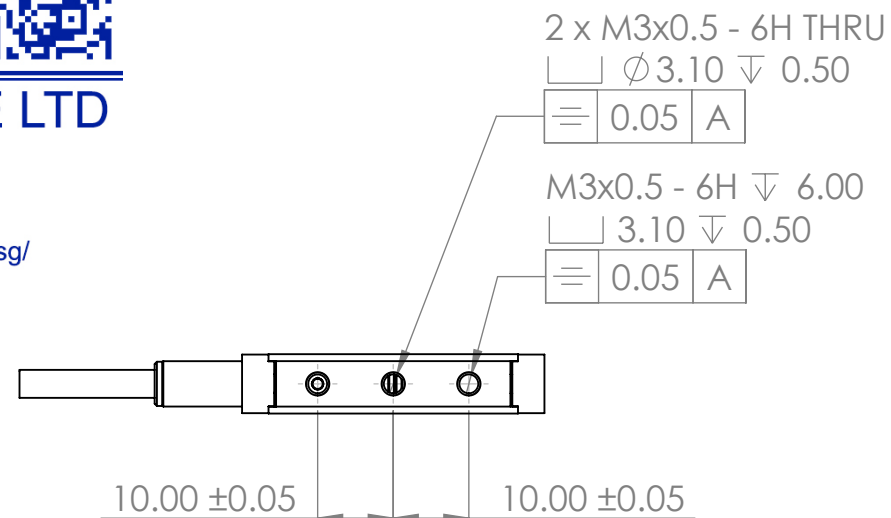


SPRING PUSH STANDARD AU/0.5/S & DU/1/S IN PARALLEL FRAME POSITION USING $\phi 6$ mm TRANSDUCER WITH AXIAL CABLE OUTLET

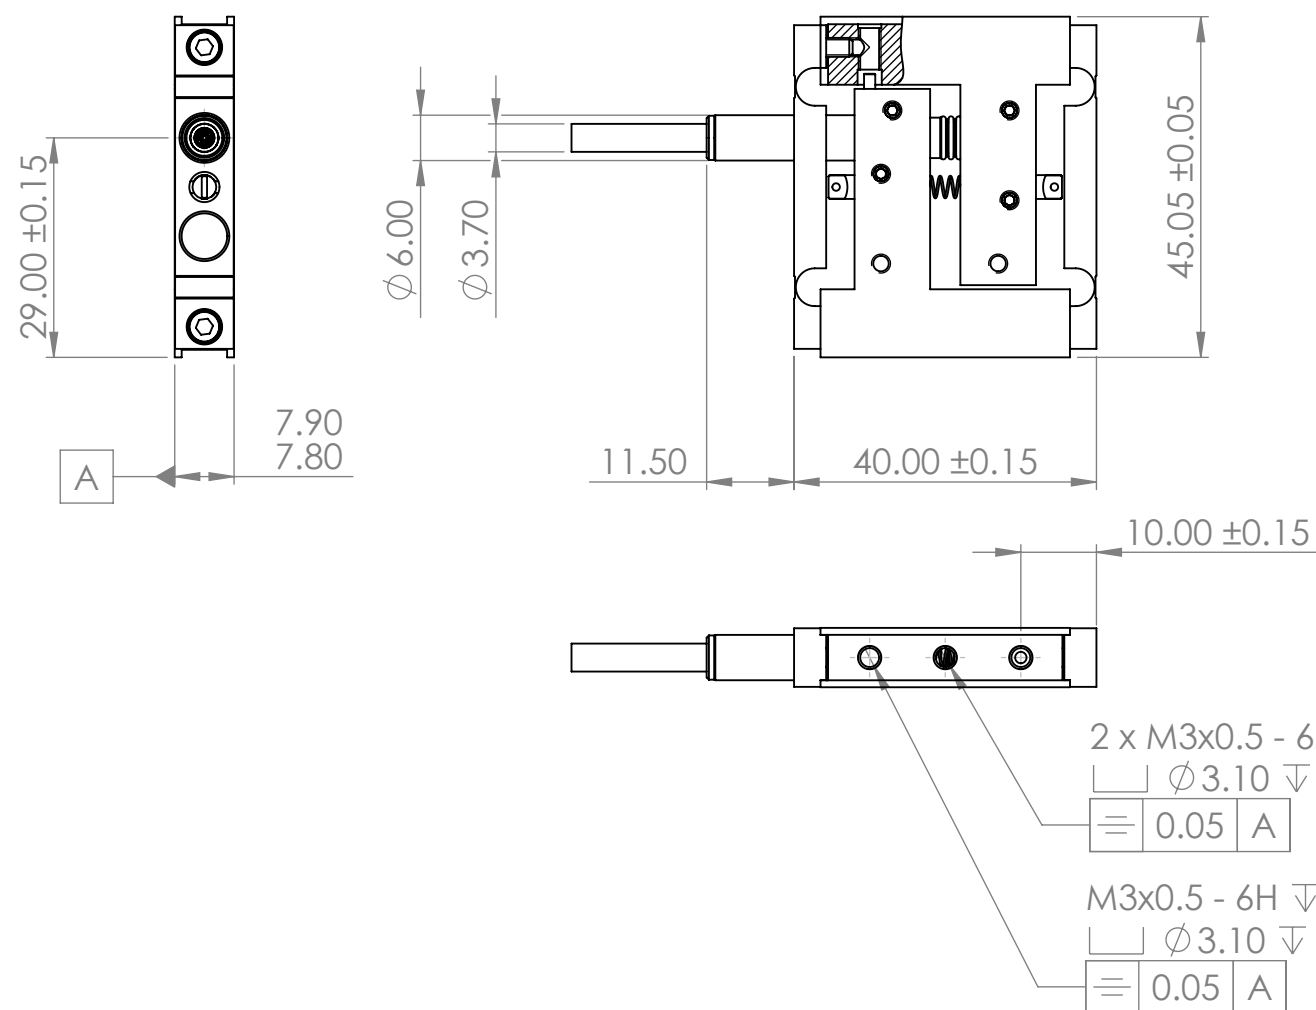

SPRING PUSH STANDARD AUR/0.5/S & DUR/1/S IN PARALLEL FRAME POSITION USING $\phi 6$ mm TRANSDUCER WITH RADIAL CABLE OUTLET

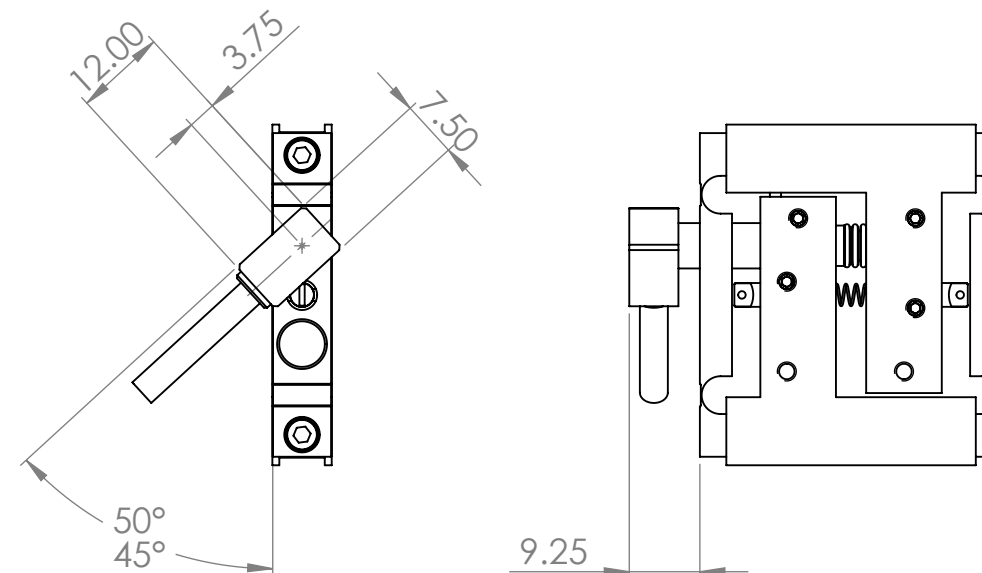

PNEUMATIC STANDARD AU/0.5/P & DU/1/P IN PARALLEL FRAME POSITION USING $\phi 6$ mm TRANSDUCER WITH AXIAL CABLE OUTLET

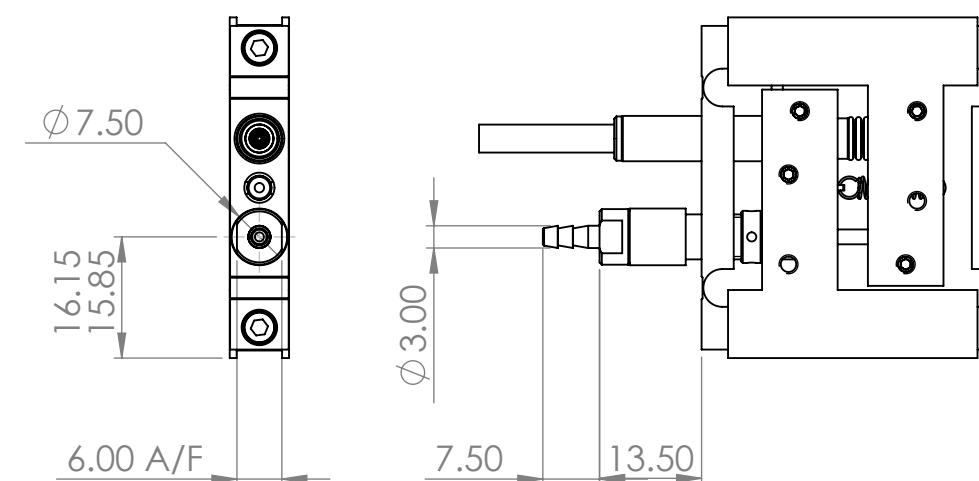

STEYNING WAY • BOGNOR REGIS • SUSSEX • ENGLAND • PO22 9ST

DRAWING NUMBER

540002-103

TITLE

FLEXURE
AU/0.5 & DU/1


E.D.C.R.

24526


ISSUE

3


SOLARTRON PURSUES A POLICY OF CONTINUOUS DEVELOPMENT. SPECIFICATIONS IN THIS DOCUMENT MAY THEREFORE BE CHANGED WITHOUT NOTICE. DIMENSIONS ARE NOMINAL AND SPECIFIED IN MILLIMETRES

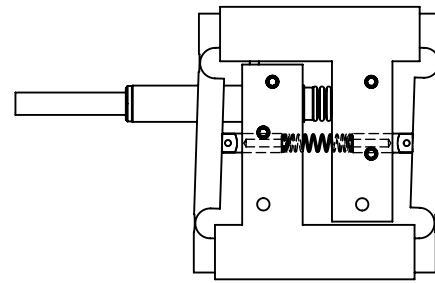


AU/0.5/S(H) OR DU/1/S
STANDARD

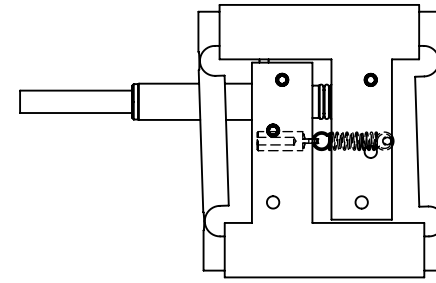


AU/0.5/R(H) OR DU/1/R
REVERSED ACTION

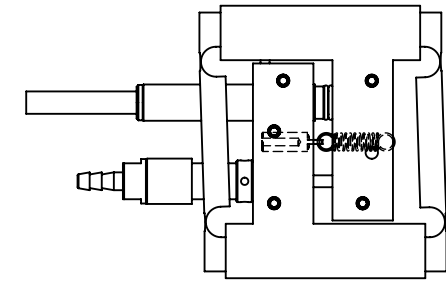


AU/0.5/P(H) OR DU/1/P
STANDARD

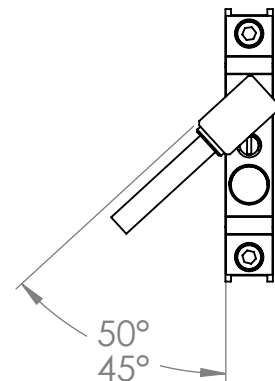


AUR/0.5/S(H) OR DUR/1/S
STANDARD

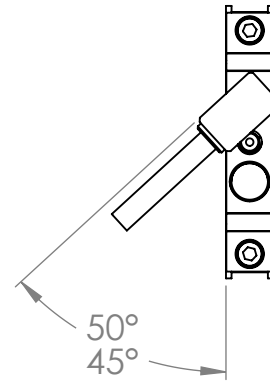

AUR/0.5/R(H) OR DUR/1/R
REVERSED ACTION

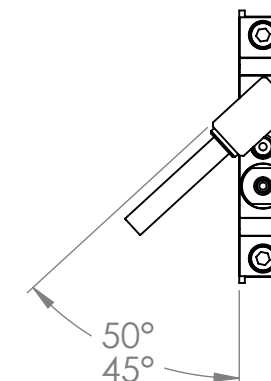

AUR/0.5/P(H) OR DUR/1/P
STANDARD

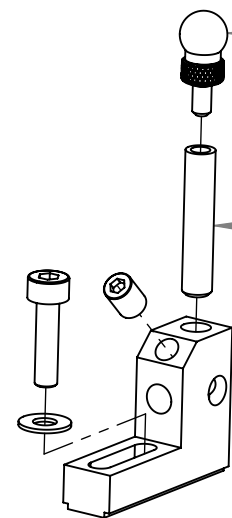


TIPS

008305-005 STANDARD
VARIOUS TIPS AVAILABLE
FOR DIFFERENT APPLICATIONS


TOOL HOLDERS

208221/20 RECOMMENDED
208221/30
208221/40
208221/60



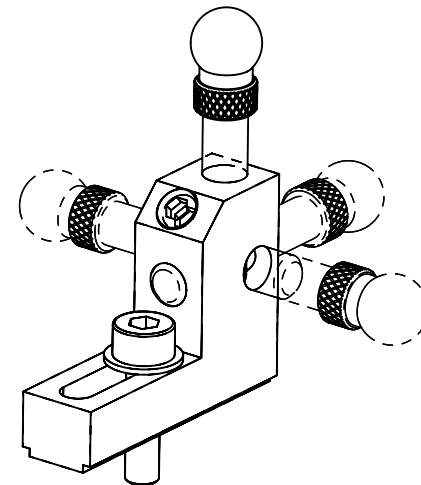


806274-SX TOOL HOLDER ASSY
AU/0.5 & DU/1 - ϕ 4mm

TIP & TOOL HOLDER SHOWN FOR ALTERNATIVE POSITIONS ONLY

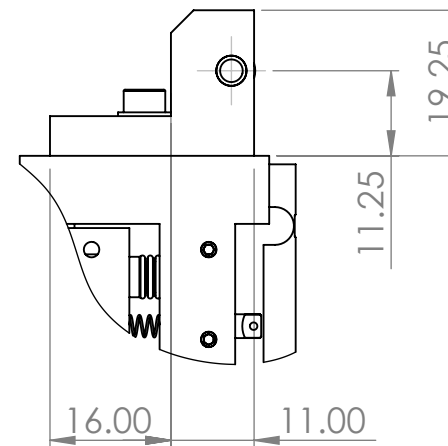

TOOL HOLDER - ASSEMBLED

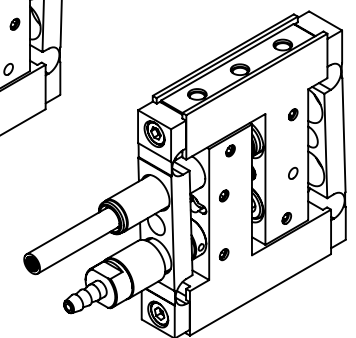

STEYNING WAY • BOGNOR REGIS • SUSSEX • ENGLAND • PO22 9ST

DRAWING NUMBER

540002-103

TITLE

FLEXURE
AU/0.5 & DU/1

E.D.C.R.

24526

ISSUE

3

SOLARTRON PURSUES A POLICY OF CONTINUOUS DEVELOPMENT. SPECIFICATIONS IN THIS DOCUMENT MAY THEREFORE BE CHANGED WITHOUT NOTICE. DIMENSIONS ARE NOMINAL AND SPECIFIED IN MILLIMETRES