



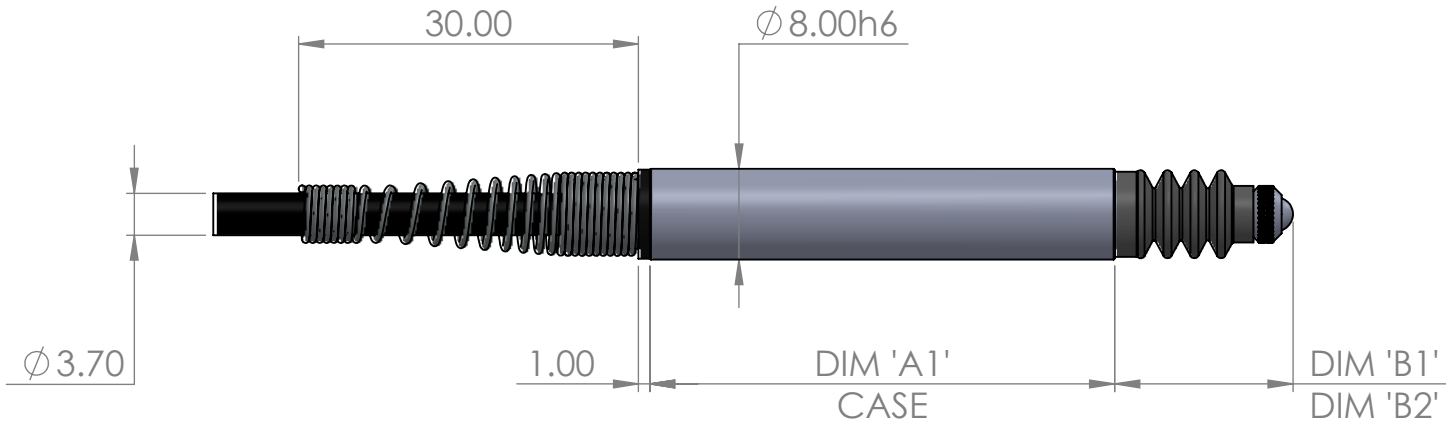

DSP/2-5/S Ø3.70 CABLE - TIP Ø3.00 SHORT REACH			
MEASUREMENT RANGE	2.00	4.00	5.00
CASE LENGTH DIM 'A1'	35.00	41.00	53.00
FULLY EXTENDED DIM 'B1'	13.00	15.80	18.00
PRE TRAVEL	0.15	0.15	0.15
POST TRAVEL	0.45	0.85	0.85
FULLY RETRACTED DIM 'B2'	10.40	10.80	12.00

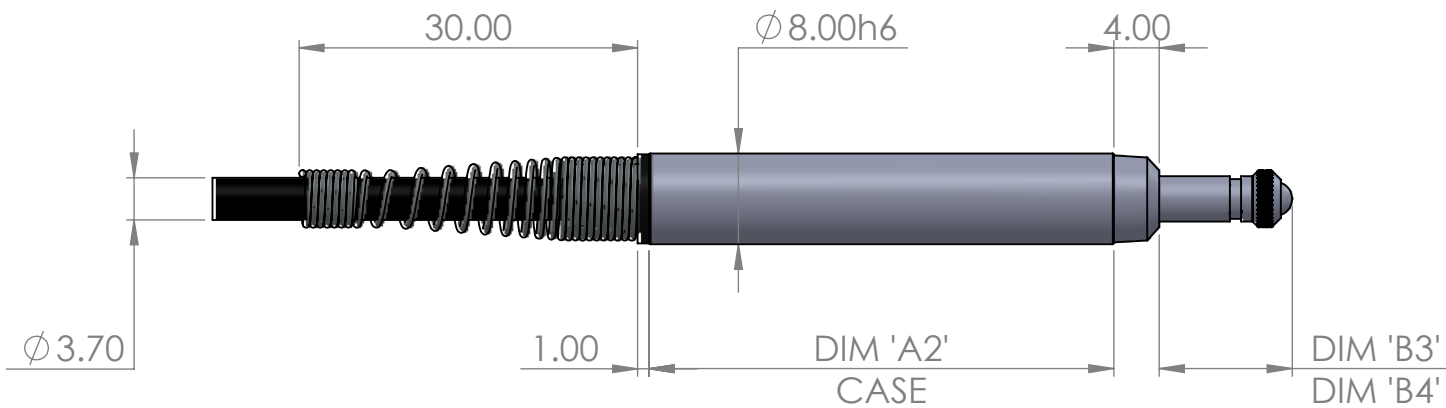

DST/2-5/S Ø3.70 CABLE - TIP Ø3.00 SHORT REACH			
MEASUREMENT RANGE	2.00	4.00	5.00
CASE LENGTH DIM 'A2'	35.00	41.00	53.00
FULLY EXTENDED DIM 'B3'	9.00	11.80	14.00
PRE TRAVEL	0.15	0.15	0.15
POST TRAVEL	0.45	0.85	0.85
FULLY RETRACTED DIM 'B4'	6.40	6.80	8.00