


World leaders in linear measurement



SI5500

ORBIT®-Digital Display

AMETEK®
ULTRA PRECISION TECHNOLOGIES

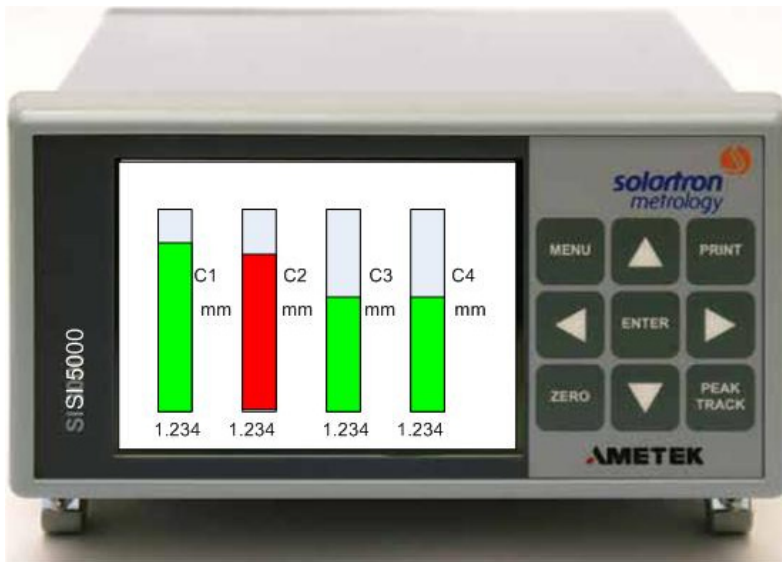

- ▶ Intuitive menu
- ▶ Accepts up to 31 Orbit Sensors
- ▶ Suite of Mathematical Functions for each channel
- ▶ Colour Display LCD Screen
- ▶ Auto colour change for in/out limit range
- ▶ User selectable bar panel or text display
- ▶ Auto course/fine resolution
- ▶ Gauging Mode
- ▶ Peak hold facility
- ▶ Data logging facility
- ▶ RS232 Connectivity
- ▶ 0.01 μm display resolution
- ▶ Available with Digital probes, Linear Encoders and Encoder Input modules
- ▶ Discrete I/O

Solartron Metrology, the world leader in digital gauging probe innovation, introduces a new multi function Digital Readout for use with Solartron Metrology's Orbit products. The Readout can interface up to 31 Orbit Module and supports Digital probes, Linear Encoders and Encoder Input Modules. It gives the user the option to select data display formats and program metrology functions.

The SI5500 features an intuitive, menu driven multiple channel display which can be programmed to display readings, set Limits/Alarms, Peak Hold, Track or act as a Data Logger. The screen can be set-up as single channel or multiple channel configurations. Users can construct mathematical formulae and Algebraic Equations to get wide variety of results for their gauging applications.

It reports dynamic Min/Max measurements, supports discrete Inputs/outputs and offers RS232 connectivity to PCs and other peripherals. A password protection feature is also available for supervisory access. SI5500 can be used as a direct replacement for Solartron Metrology's Legacy readout DR600/700 with added benefits of new features while maintaining the features of the DR products such as Gauging Mode.



SI5500 can connect to a stack of up to 31 Orbit Modules


Technical Specification

SI5500	
LCD Display	
Digital	2 x Colour LCD
Analogue Display	Selectable 1,2,4,8,16 Channel Vertical Bar
Text Display	Selectable 8,16 Channel Text Display
Update Speed	Depends on the complexity of formula used
Nominal value is: 20 Hz	Depends on the complexity of formula used
Display Length (metric)	± XX.XXXXX (User Selectable)
Display Length (imperial)	± XX.XXXXX (User Selectable)
Resolution (metric)	Down to 0.01 µm (User Selectable)
Resolution (imperial)	Down to 0.000001 " (User Selectable)
Keypad	
Membrane (9 keys)	Print, Zero, Up, Down, Left, Right, Enter, Peak/Hold/Track, Menu
Measurement Type	User Configurable. Provides multiple math functions and operators using which user can enter required expression
Data Logging	8 pages of log data with 4000 readings per channel for each page via switch or 1 m - 24 hour time interval
Indications	mm/inch/deg/rad, Lower & Upper Limits, Out of Range, Measurement Mode, Operation mode, Formula expression for the channel
Power Requirements	+24 VDC ± 10%
External I/O	
Serial	RS232 Serial Port (for Printer or PC)
Discrete Outputs	6 isolated outputs with user configurable functionality
Discrete Inputs	6 inputs with user selectable configuration
Environmental	
Operating Temperature Range (°C)	0 to +50
Storage Temperature Range (°C)	-20 to +50
Electrical Immunity	EN61000-6-2:2001
Electrical Emissions	EN61000-6-3:2001
Front Panel Sealing	IP 65
Mechanical	
Mounting	Bench Top or Panel Mount
Dimensions WxHxD (mm)	Without Bezel: 134 x 65 x 160 With Bezel: 144 x 74 x 175

Note: An adaptor module is required to convert the SI5500 25 way D type I/O connector to match the DRO connections. Contact our Sales offices for more details

Interfacing to the SI5500


SI5500 Interfaces with Digital Probes, Linear Encoders and Encoder Input Modules

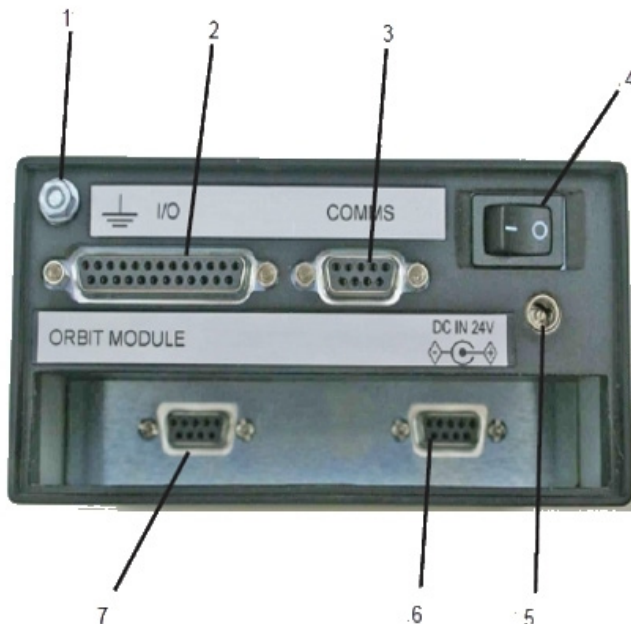

1. Screen Earth
2. Input/Output Connection
3. RS232 Communications
4. 24V DC ON/OFF Switch
5. 24V DC Supply
6. Orbit Connection
7. Orbit Connection

Mechanical Outline


Panel Dimensions

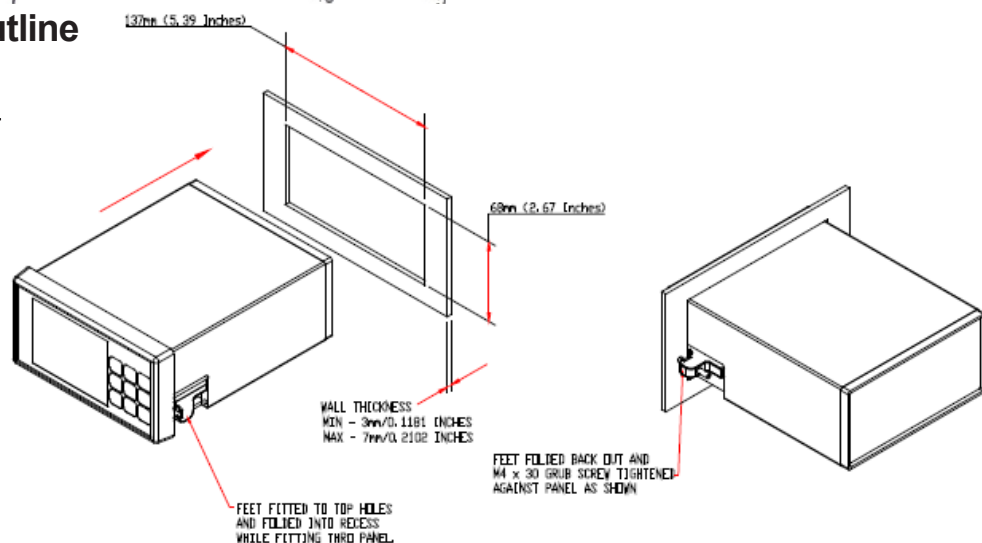

Assembly Dimensions




SCIGATE AUTOMATION (S) PTE LTD
 No.1 Bukit Batok Street 22 #01-01 Singapore 659592
 Tel: (65) 6561 0488 Fax: (65) 6562 0588
 Email: sales@scigate.com.sg Web: www.scigate.com.sg
 Business Hours: Monday - Friday 8.30am - 6.15pm

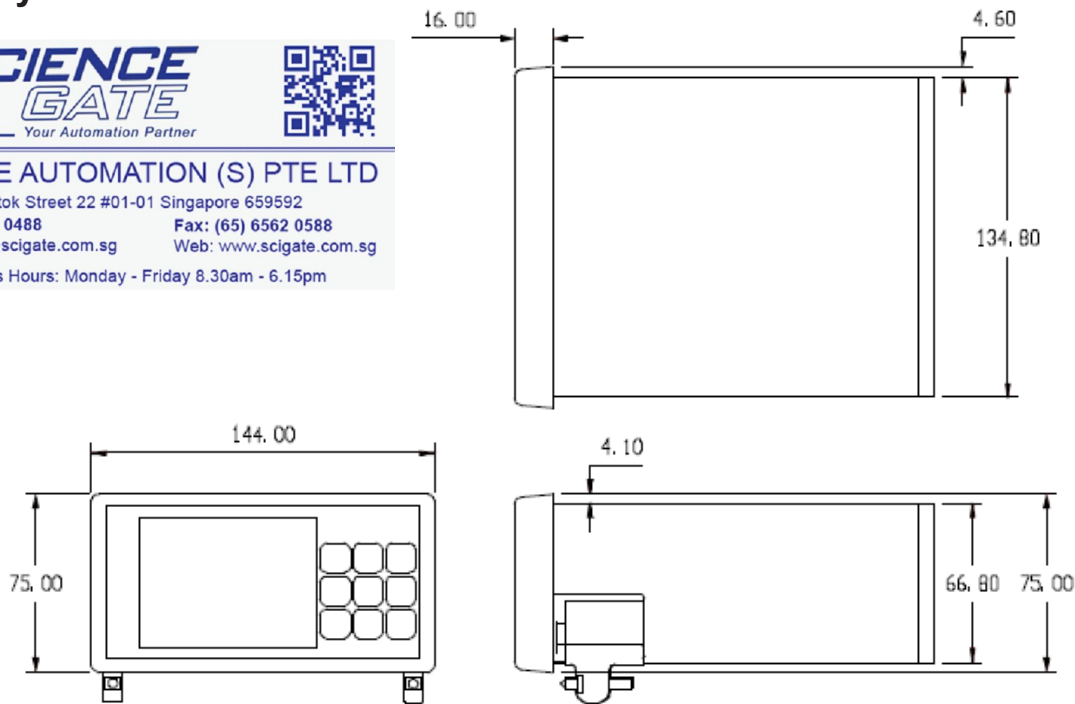

For 3D drawings please contact sales.solartronmetrology@ametek.com



In the laboratory, on the shop floor or in the field, Solartron Metrology's products provide precise linear measurements for quality control test and measurement and machine control. Wherever you are based in the world and whatever your application, Solartron Metrology has the technology, the commitment and the

United Kingdom - Head Office

Solartron Metrology
 Steyning Way
 Bognor Regis
 West Sussex
 PO22 9ST
 Tel: +44 (0) 1243 833333
 Fax: +44 (0) 1243 833322
 Sales.solartronmetrology@ametek.com

France

Solartron Metrology
 Rond-point de l'Espine des Champs
 Buroplus - Bat. D
 Elancourt 78990
 Tel: +33 (0)1 30 68 89 50
 Fax: +33 (0)1 30 68 89 59
 france.solartronmetrology@ametek.com

Germany

Ametek GmbH
 Solartron Metrology Division
 Rudolf-Diesel-Strasse 16
 40670 Meerbusch
 Tel: +49 (0) 2159 9136 500
 Fax: +49 (0) 2159 9136 505
 Vertrieb.solartron@ametek.de

India

Ametek Instruments India Private Limited
 1st Floor, Left Wing
 Prestige Featherlite Tech Park
 Plot #148, EPIP II Phase
 Whitefield, Bengaluru 560 066
 Karnataka, India
 Tel: +91 80 6782 3200
 Fax: +91 80 6782 3232

USA

Solartron Metrology
 USA Central Sales Office
 915 N. New Hope Road, Suite C
 Gastonia, NC 28054
 Tel: +1 800 873 5838
 Fax: +1 704 868 8466
 usasales.solartronmetrology@ametek.com

China

AMETEK Commercial Enterprise
 (Shanghai) Co. Ltd
 No. 1 AMETEK Road
 Ju Ting Economic Development Zone
 Shanghai 201615
 Tel: +86 21 5763 2509
 Fax: +86 21 5866 0969 Ext. 261/262
 china.solartronmetrology@ametek.com



Offices worldwide

Agent and distributor details available at
www.solartronmetrology.com



Q 09540

Solartron pursues a policy of continuous development. Specifications in this document may therefore be changed without notice.

Datasheet 503156
 Issue A
 EDCR 20583