


# R08IB3S-OFU1 8.4" Panel PC (Intel® Celeron® Bay Trial-M N2930 1.83GHz)


## Mechanical Design



Open Frame

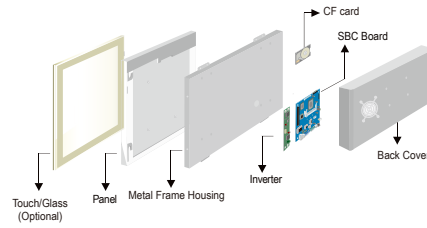


Modularized Construction

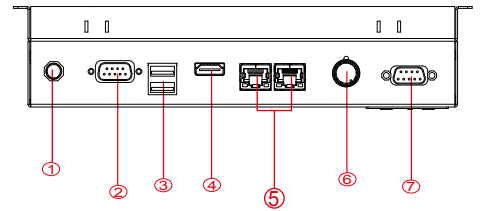


1. DC-in 12V.
  2. RS232/422/485
  3. 1 x USB 3.0 ,1 x USB 2.0
  4. HDMI
  5. 2 x RJ-45
  6. Dimming Knob
  7. RS232
- Default setting:RS232


FRONT VIEW





SIDE VIEW



BACK VIEW



Measurements shown in mm  
All Dimensions are ± 0.5 mm

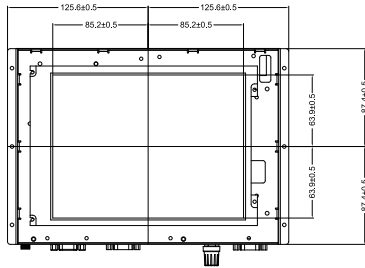

BOTTOM VIEW

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

## Specifications

### System :

- CPU : Intel® Celeron® Bay Trial-M N2930 1.83GHz
- Memory Slot : SODIMM DDR3L 1600/1333 Max. 8G
- System Chipset : Intel®ATOM SoC Integrated
- IDE/SATA : 1 x SATA II
- LAN : Intel® I210-AT GbE LAN x 2
- Audio Codec : Realtek ALC886 HD Audio Codec

### Input / Output :

- Serial Ports : 1 x RS232, 1 x RS232/422/485
  - USB Ports : 1 x USB 3.0, 1 x USB 2.0
  - Ethernet : 2 x RJ45-10/100/1000 Mbps
  - HDMI : 1 x HDMI
  - Power : 1 x DC-in Power Jack(+12V)
- Default setting:RS232

### Expansion Slots:

- 1 x Mini PCIe slot (for wireless module)
  - 1 x Mini PCIe slot (for SATA SSD)
- \* A customized housing is needed if you would like to have the PCI expansion.

### Power Specifications :

- Power Input : 12V DC-IN Power input
- Power Consumption : 35W (typ.)(Max.backlight & high CPU load)

### Accessories :

- External Adapter : 110~240V Ac-in Power Adapter

### Panel Spec :

- Size/Type : 8.4"TFT
- Resolutions : 800x600
- Brightness : 600 (typ.)
- Contrast Ratio : 600: 1 (typ.)
- Viewing Angle : -75~75(H);-60~70(V)
- Max. Colors : 16.2M(8bits/color)

### Environment Considerations :

- Operating Temperature : 0 deg.C to 50 deg.C
- Operating Humidity : 30% to 90% (non condensing)

### OS BSP / Driver Support :

- Support Windows 10 IoT Enterprise / Windows Embedded 8 \* / Windows Embedded 7
- \*For Windows Embedded 8, this panel PC does not support the Metro UI, only the desktop mode

### Security Support

- Trusted Platform Module (TPM 1.2)

### Order Options :

Mechanical : Open Frame	Storage : 2.5" HDD/ mSATA
Touch : 4 Wires Resistive(Optional) AR Glass (Optional)	RAM : SODIMM DDR3L 1600/1333 Max. 8G
	OS : Windows 10 IoT Enterprise Windows Embedded 8 / Windows Embedded 7



SCIGATE AUTOMATION (S) PTE LTD  
No.1 Bukit Batok Street 22 #01-01 Singapore 659592  
Tel: (65) 6561 0488 Fax: (65) 6562 0588  
Email: sales@scigate.com.sg Web: www.scigate.com.sg  
Business Hours: Monday - Friday 8.30am - 6.15pm

Revised date: 12-Jul-2017 V1.2



Note: All Specifications are subject to change without prior notice!