

Rugged Industrial PDA 4.3" with HF RFID **E430RM4-3HF**

Product Features:(with RFID)


- 4.3" 800x480 Panel with Projective Capacitive Multi-touch.
- Built-in Wi-Fi/ Bluetooth/ GPS / 3G
- Built-in 2 Mega-pixel camera at front side and 8 Mega-pixel camera with LED at rear side
- Built-in HF RFID 13.56Mhz Reader Technology
- Water and dust proof ID IP65 design
- Compliance with MIL-STD-810G for High/Low temperature, Vibration, Drop test
- Support Android 4.2 operating system
- 3900 mAh full-day battery with removable design

Product Specifications:

System Specification	Processor	ARM® Cortex™-A7 Quad Core 1.5Ghz
	System Memory	1GB SDRAM
	Storage	4GB eMMC(Optional to 32GB, MOQ:1K)
	Operating System	Android 4.2
Display Specification	Size	4.3"
	Resolution	480 x 800
	Brightness	400(typ.)
	Touch	Projective Capacitive Multi-touch
Wireless Communication	WLAN	802.11 a/b/g/n
	Bluetooth	Bluetooth V3.0
	WWAN	GSM / GPRS / EDGE / WCDMA / HSDPA / HSUPA
	GPS	Built-in GPS module
System I/O Buttons Indicators Sensors	Audio	1 x Built-in Mic, 1 x Earphone, 1 x 1.2W Speaker
	External I/O	1 x SIM card slot, 1 x Micro SD card slot, 1 x Micro USB, 1 x Pogo Pin For charging
	Buttons	1 x Volume - +, 1 x Power button, 1 x Function button
	LED	4 xCapactive buttons:Home/ Menu/ ESC/ Search functions
	Sensors	1 x LED indicator
Data Capture	Camera	Light Sensor, Proximity Sensor, G-sensor, Digital Compass
	Camera	Rear: 8 Mega-Pixel Camera with LED auxiliary light (Auto Focus)
	Data Capture	Front: 2 Mega-Pixel Camera
Mechanical and Environment	Dimension (W x L x H)	132.57 x 81.87 x 27.4 mm
	Weight	275g
	Operating Temperature	-10°C to 50°C(Battery Mode)
	IP Proof	IP65
	Shock	MIL-STD-810G Method 516.6 Procedure I
	Vibration	MIL-STD-810G Method 514.6 Procedure I
	Drop	MIL-STD-810G Method 516.6, 4 ft, Free to concrete
	Certifications	CE, FCC, CCC
Power Management	Battery	3.7V 3900mAh Li-poly removable battery
	Battery Operating Time	20 Hrs *
	Adapter	5V/1A , USB Adapter

*Note: Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.

Drawing

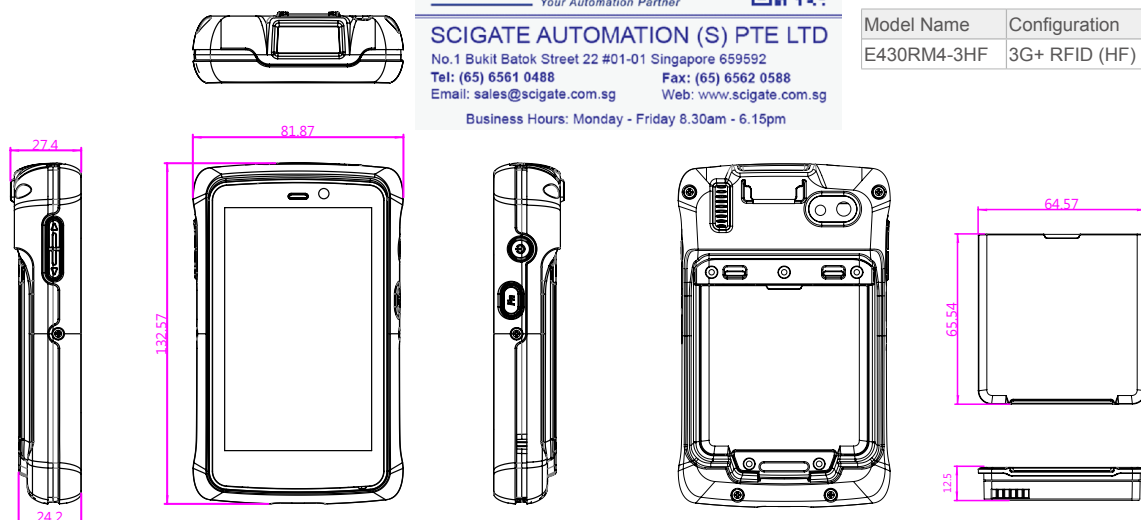

SCIENCE GATE
Your Automation Partner

SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

RFID Reader

Support Card Type (13.56 MHz)	
ISO 15693	TI HF-I Plus, TI HF-I Pro, NXP I-Code SLI
ISO 14443-A	NXP Mifare_One(S50_4byte), NXP Mifare_One(S50_7byte), NXP Mifare_One(S70_4byte), NXP Mifare_UltraLight, NXP Mifare_UltraLight C
ISO 18092(R/W)	SONY Felica Lite s, SONY Felica Lite

Order Information:

Model Name	Configuration
E430RM4-3HF	3G+ RFID (HF) + Android