

Rugged Industrial PDA 4.3"

E430RM4

Product Features:

- 4.3" 800x480 Panel with Projective Capacitive Multi-touch.
- Built-in Wi-Fi/ Bluetooth/ GPS / 3G
- Built-in 2 Mega-pixel camera at front side and 8 Mega-pixel camera with LED at rear side
- Support NFC Function
- Water and dust proof ID IP65 design
- Compliance with MIL-STD-810G for High/Low temperature, Vibration, Drop test
- Support Android 4.2 operating system
- 3900 mAh full-day battery with removable design



Product Specifications:


System Specification	Processor	ARM® Cortex™-A7 Quad Core 1.5Ghz
	System Memory	1GB SDRAM
	Storage	4GB eMMC(Optional to 32GB, MOQ:1K)
Display Specification	Operating System	Android 4.2
	Size	4.3"
	Resolution	480 x 800
	Brightness	400(typ.)
Wireless Communication	Touch	Projective Capacitive Multi-touch
	WLAN	802.11 a/b/g/n
	Bluetooth	Bluetooth V3.0+EDR
	WWAN	GSM / GPRS / EDGE / WCDMA / HSDPA / HSUPA
	GPS	Built-in GPS module
System I/O Buttons Indicators Sensors	Audio	1 x Built-in Mic, 1 x Earphone, 1 x 1.2W Speaker
	External I/O	1 x SIM card slot, 1 x Micro SD card slot, 1 x Micro USB, 1 x Pogo Pin For charging
	Buttons	1 x Volume - +, 1 x Power button, 1 x Function button
	LED	4 x Capacitive buttons:Home/ Menu/ ESC/ Search functions
Data Capture	Sensors	1 x LED indicator
	Camera	Light Sensor, Proximity Sensor, G-sensor, Digital Compass
	NFC	Rear: 8 Mega-Pixel Camera with LED auxiliary light (Auto Focus) Front: 2 Mega-Pixel Camera
Mechanical and Environment	Read / Write mode (Refer to NFC Tag Support table)	Peer to Peer mode
	Dimension (W x L x H)	132.57 x 81.87 x 27.4 mm
	Weight	260g
	Operating Temperature	-10 °C to 50 °C(Battery Mode)
	IP Proof	IP65
	Shock	MIL-STD-810G Method 516.6 Procedure I
	Vibration	MIL-STD-810G Method 514.6 Procedure I
	Drop	MIL-STD-810G Method 516.6, 4 ft, Free to concrete
	Certifications	CE, FCC, CCC
	Power Management	Battery
Battery Operating Time		20 Hrs *
Adapter		5V/1A , USB Adapter

*Note: Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.

NFC Tag Support

Support Card Type (13.56 MHz)	
NFC Forum Platform	Type 1, Type 2, Type 3, Type 4
ISO 15693	TI HF-I Plus, TI HF-I Pro, NXPCode SLI
ISO 14443-A	NXP Mifare_One(S50_4byte), NXP Mifare_One(S50_7byte), NXP Mifare_One(S70_4byte), NXP Mifare_UltraLight, NXP Mifare_UltraLight C, NXP Mifare_DesFire_EVI
ISO 14443-B	ifineon JTOP
ISO 18092(R/W)	SONY Felica Lite s, SONY Felica Lite

Drawing

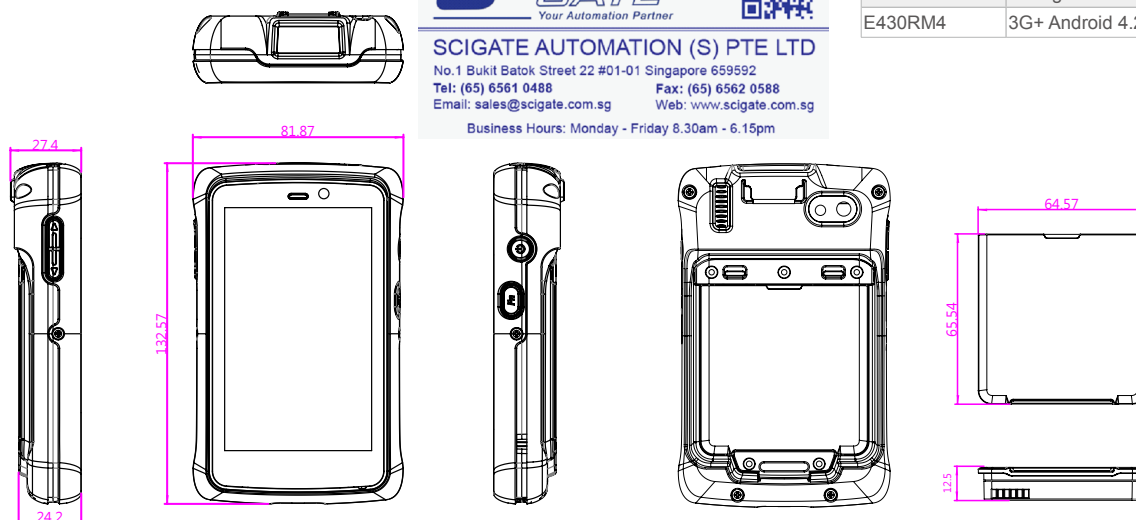

SCIENCE GATE
Your Automation Partner

SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

Order Information:

Model Name	Configuration
E430RM4	3G+ Android 4.2