

Rugged Industrial PDA 4.3"

E430RT-HFC

Product Features:

- 4.3" 480x800 Panel with Projective Capacitive Multi-touch.
- Built-in Wi-Fi/ Bluetooth/ GPS.
- 5 Mega-pixel camera with LED at rear side.
- Build in RFID Reader Technology for maximum business functionality.
- Water and dust proof ID IP65 design.
- Compliance with MIL-STD-810G for High/Low temperature, Vibration, Drop test.
- Support Windows CE 6.0 operating system.

Product Specifications:

System Specification	Processor	TI Cortex A8 OMAP DM3730 1GHz
	System Memory	512MB SDRAM
	Storage	512MB NAND flash
	Operating System	Windows CE 6.0
Display Specification	Size	4.3"
	Resolution	480 x 800
	Brightness	400(typ.)
	Touch	Projective Capacitive Multi-touch
	Data Capture Scanning	RFID Reader(HF)
Wireless Communication	WLAN	802.11 b/g/n
	Bluetooth	Bluetooth V2.1+EDR
	GPS	Built-in GPS module
Mechanical and Environment	Dimensions (W x L x H)	132.2 x 82 x 25.7 mm
	Weight	260g
	Operation Temperature	-10 °C to 50 °C(Battery Mode)
	IP Proof	IP65
	Shock	Shock MIL-STD-810G M516.5
	Vibration	Vibration MIL-STD-810G M514.5
	Drop	MIL-STD-810G M516.5, 4 ft, Free to concrete
	Certifications	CE, FCC,UL
System I/O Buttons Indicators Sensors	Audio	1 x Built-in Mic, 1 x Earphone, 1 x 1.2W Speaker
	External I/O	1 x SIM card slot, 1 x Micro SD card slot, 1 x Micro USB, 1 x Pogo Pin For charging
	Buttons	1 x Volume - +, 1 x Power button, 1 x Function button 4 x Capacitive buttons:Home/ Menu/ ESC/ Search functions
	LED	1 x LED indicator
	Sensors	Light Sensor, Proximity Sensor, G-sensor, Digital Compass
Field Service	Main Camera (Rear)	5 Mega-Pixel Camera with LED auxiliary light
	Light Sensor	Built-in
	Proximity (Light) Sensor	Built-in
Power	Battery	3.7V 3900mAh Li-poly removable battery
	Battery Operating Time	10 Hrs *
	Adapter	5V/1A , USB Adapter





RFID Reader

Support Card Type (13.56 MHz)	
ISO 15693	TI HF-I Plus, TI HF-I Pro, NXPI-Code SLI
ISO 14443-A	NXP Mifare_One(S50_4byte), NXP Mifare_One(S50_7byte), NXP Mifare_One(S70_4byte), NXP Mifare_UltraLight, NXP Mifare_UltraLight C
ISO 18092(R/W)	SONY Felica Lite s, SONY Felica Lite




*Note: Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.

Drawing

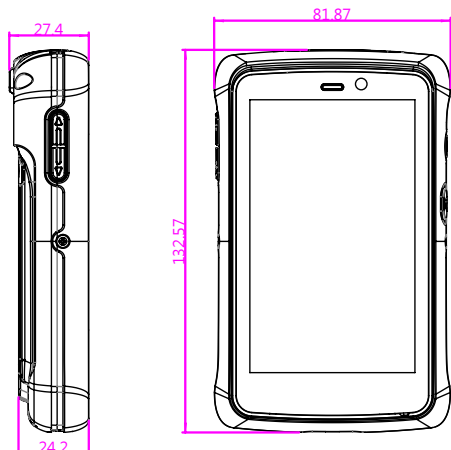

SCIENCE GATE
Your Automation Partner

SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

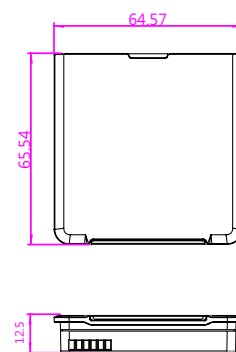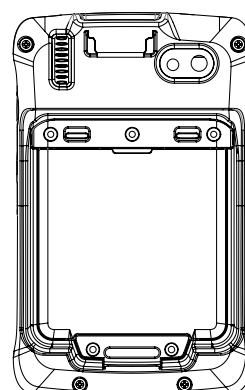

Order Information:

Model Name	Configuration
E430RT-HFC	RFID (HF) + Win CE6.0