

Rugged Industrial PDA 4.3" E430RT-HFM

Product Features:

- 4.3" 480x800 Panel with Projective Capacitive Multi-touch.
- Built-in Wi-Fi/ Bluetooth/ GPS.
- 5 Mega-pixel camera with LED at rear side.
- Build in RFID Reader Technology for maximum business functionality.
- Water and dust proof ID IP65 design.
- Compliance with MIL-STD-810G for High/Low temperature, Vibration, Drop test.
- Support Windows Embedded Handheld 6.5 operating system.

Product Specifications:

System Specification	Processor	TI CortexA8 OMAP DM3730 1GHz
	System Memory	512MB SDRAM
	Storage	512MB NAND flash
	Operating System	WEH 6.5
Display Specification	Size	4.3"
	Resolution	480 x 800
	Brightness	400(typ.)
	Touch	Projective Capacitive Multi-touch
Wireless Communication	Data Capture Scanning	RFID Reader(HF)
	WLAN	802.11 b/g/n
	Bluetooth	Bluetooth V2.1+EDR
	GPS	Built-in GPS module
Mechanical and Environment	Dimensions (W x L x H)	132.2 x 82 x 25.7 mm
	Weight	260g
	Operation Temperature	-10 °C to 50 °C(Battery Mode)
	IP Proof	IP65
	Shock	Shock MIL-STD-810G M516.5
	Vibration	Vibration MIL-STD-810G M514.5
	Drop	MIL-STD-810G M516.5, 4 ft, Free to concrete
	Certifications	CE, FCC,UL
System I/O Buttons Indicators Sensors	Audio	1 x Built-in Mic, 1 x Earphone, 1 x 1.2W Speaker
	External I/O	1 x SIM card slot, 1 x Micro SD card slot, 1 x Micro USB, 1 x Pogo Pin For charging
	Buttons	1 x Volume - +, 1 x Power button, 1 x Function button
	LED	4 x Capacitive buttons:Home/ Menu/ ESC/ Search functions
	Sensors	1 x LED indicator
Field Service	Sensors	Light Sensor, Proximity Sensor, G-sensor, Digital Compass
	Main Camera (Rear)	5 Mega-Pixel Camera with LED auxiliary light
	Light Sensor	Built-in
Power	Proximity (Light) Sensor	Built-in
	Battery	3.7V 3900mAh Li-poly rechargeable battery
	Battery Operating Time	10 Hrs *
Adapter	5V/1A , USB Adapter	


*Note: Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.



RFID Reader

Support Card Type (13.56 MHz)	
ISO 15693	TI HF-I Plus, TI HF-I Pro, NXP Code SLI
ISO 14443-A	NXP Mifare_One(S50_4byte), NXP Mifare_One(S50_7byte), NXP Mifare_One(S70_4byte), NXP Mifare_UltraLight, NXP Mifare_UltraLight C
ISO 18092(R/W)	SONY Felica Lite s, SONY Felica Lite

Drawing

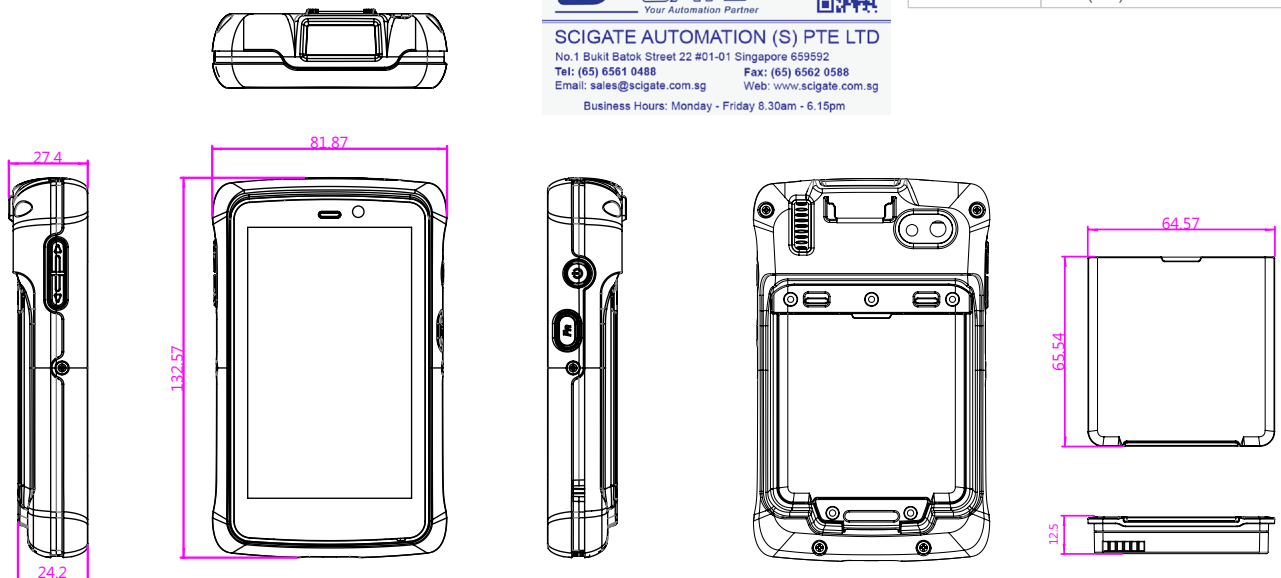

SCIENCE GATE
Your Automation Partner

SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

Order Information:

Model Name	Configuration
E430RT-HFM	RFID(HF) + WEH 6.5