

# M133WU, 13.3-inch Rugged Tablet PC with Ubuntu OS

A Rugged Tablet that Can Survive Any Environment and Get Real Work Done

M133WU is a rugged tablet PC with robust set of features designed to withstand industrial use while providing high tech solutions that increase productivity, improve safety, and reduce operational costs. The processing power comes from Intel's Core i5-5200U Broadwell processor paired with Ubuntu 16.04 OS for more software development possibilities. The tablet features a brilliant, wide viewing angle with direct optical bonding, projective capacitive touch screen, which is outdoor viewable and offers 1920 x 1080 pixel resolution. Equipped with a built-in kickstand, the M133WU is a powerful workstation with reliable performance in a mobile and ultra-rugged design.



## Highlights

- Intel Core i5-5200U Broadwell Processor
- 13.3" 1920 x 1080 wide viewing angle LED Panel with direct optical bonding
- Magnesium alloy housing with all-around elastomeric rubber
- Built-in kickstand
- Optional hot-swappable user-replaceable battery
- IP65 waterproof and dustproof
- Rated for extreme temperature use

Order Information				
	4G	1D/2D Barcode Reader*	HF RFID	Smart Card Reader*
M133WU	N/A	Optional	Optional	Optional
M133WU-LE	4G/LTE for Europe	Optional	Optional	Optional
M133WU-LA	4G/ LTE for North America	Optional	Optional	Optional

\*Barcode Reader and Smart Card Reader are mutually exclusive options.

# M133WU, 13.3-inch Rugged Tablet PC with Ubuntu OS

A Rugged Tablet that Can Survive Any Environment and Get Real Work Done

## Display Specification

Size	13.3-inch display with LED Backlight
Resolution	1920 x 1080
Brightness	8-350 nit
Touch	With direct Optical bonding for sunlight readable Multi-touch projected capacitive with Glove/ Rain / Stylus mode, active pen support
Contrast Ratio	800:1
Viewing Angle	85/85/85/85
Technology	• Intel HD Graphics (built-in CPU) video controller

## System Specification

Processor	Intel Core i5-5200U Broadwell Processor 2.2 GHz, up to 2.7 GHz with turbo boost technology
System Memory	4GB DDR3L SDRAM (up to 16GB) <sup>1</sup>
Storage	128GB M.2 MLC SSD Up to 1TB with two solid state drives SSD, two internal M.2 slots
Operating System	Ubuntu 16.04

## Wireless Communication

WLAN	802.11 a/b/g/n/ac Intel® Dual Band Wireless-AC 7265 802.11 a/b/g/n/ac (M.2)
Bluetooth	Bluetooth 4.0 Intel® Dual Band Wireless-AC 7265 Bluetooth 4.0 Dual Mode (Classic + Low Energy) (M.2)
GPS	u-Blox NEO-6Q
WWAN	Optional 4G (LTE,HSPA+,GSM/GPRS/EDGE, EV-DO Rev A, 1xRTT)

## Interface

Docking Connector	1 x 24-pin docking connector
HDMI	1 x HDMI
Serial Port	1 x RS232 Serial COM Port
LAN	1 x RJ45-10/100/1000 Mbps LAN
USB	2 x USB 3.0, 2 x USB 2.0
Power Input	1 x Power Jack
Micro SD	1 x Micro SD Slot
Audio Connector	1 x Headphone Combo
Service Window	Access to 2 x M.2 SSD cards and 1 x mini PCI-e WWAN card
Expansion Window	1 x Optional Expansion Window (Smart Card Reader/ Barcode)

## Keyboard and Input

Touch	• 10-point multi touch, support Hand / Gloves, Rain Mode, and Active Pen
Button	• On-screen QWERTY keyboard 7 membrane keys: 1 x power, 1 x menu, 3 x function key (Programmable function key configured by Hottab Utility), 2 x volume key
LED Indicators	Power, Battery, SSD, RF

## Audio

Microphone	1 x built-in Digital Mic with Noise Cancellation
Speaker	2 x 1 watt speaker

## Cameras

Web Camera	2MP webcam
Rear Camera	8MP rear camera with autofocus and LED light

## Data Capture

Barcode Reader	Optional short range 1D/2D barcode reader <sup>2</sup> Motorola SE4500 <sup>2</sup>
Smart Card Reader	Optional built-in smart card reader Comply with ISO7816-1.2.3 T=1 and T=Ø protocol
RFID	Optional HF RFID Reader 13.56 MHz ISO15693, ISO14443A, ISO18092



**SCIGATE AUTOMATION (S) PTE LTD**

No.1 Bukit Batok Street 22 #01-01 Singapore 659592  
Tel: (65) 6561 0488 Fax: (65) 6562 0588  
Email: sales@scigate.com.sg Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

## Security Function

Security	<ul style="list-style-type: none"> <li>• Password security for user and hard disk lock</li> <li>• Trusted Platform Module (TPM) V2.0 <sup>3</sup></li> <li>• Computrace theft protection agent <sup>4</sup></li> <li>• Kensington lock slot</li> </ul>
Mobile Device Management	SOTI Mobicontrol compatible <sup>4</sup>

## Mechanical and Environment

Dimension (W x L x H)	338.2 x 240 x 30 mm (13.3 x 9.4 x 1.18 inches) <sup>5</sup>
Housing	Rear magnesium alloy die-casting design
Cooling System	Fanless thermal design
Weight	2.4 kg (5.29 lbs) without kickstand, 2.8 kg (6.17 lbs) with kickstand
Operating Temperature	-10°C to 50°C (14°F to 122°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Humidity	30% to 80% RH, non-condensing
IP Proof	IP65 certified, dustproof and waterproof
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
Drop	MIL-STD-810G Method 516.6, 4 ft to concrete
ESD (Contact/Air)	12kV/12kV

## Power Management

Power Input	12V DC or 19V DC
Battery	7.4V, typ. 10280 mAh Li-Polymer Battery (2S2P)
Battery Operating Time	Std. Battery: 11 hours <sup>6</sup> BAPCo TabletMark v3
Adapter	100-240V, 50-60Hz / 19V DC

## Accessories


### Standard Accessories

Adapter and PowerCord	922D065W19V1
Standard Battery	98KT00A0000R
Stylus	9B000000006U
Stand with Integrated Handle	98KT00A0000U

### Optional Accessories <sup>7</sup>

VESA Mounting Kit	98KT00A0000Q
VESA Mounting Kit 2	98KT00A00019
RAM Mounting Kit	98K000A0007Z
Shoulder Strap	9B000000007I
Battery Charger	98JT00A00001
Active Pen	98K000A0007L
Vehicle Charger	9226065W19V0

### Drawing <sup>8</sup>

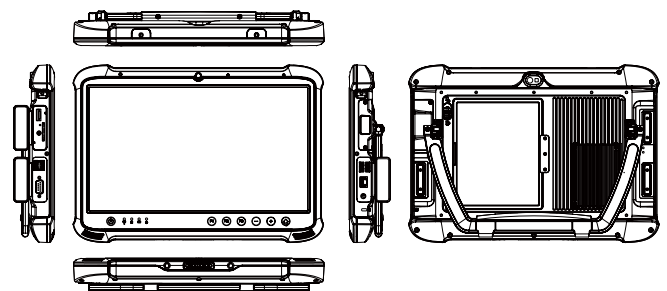

Do Not Expose the Battery Pack to Excessive Heat, or Extreme Heat (Near Fire, in Direct Sunlight for example)  
Do not expose bare skin to this product when handling this unit in extreme hot or cold environments

1. Total usable memory will be less depending upon actual system configuration.
2. Barcode and smart card readers are mutually exclusive options.
3. TPM 2.0 available upon request.
4. Computrace theft protection and SOTI are available upon request.
5. Length measurements do not include protrusions. Weight varies with options.
6. Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.<sup>8</sup>
7. Accessories and Integrated Options may vary depending on your configuration.
8. This is a simplified drawing and some components are not marked in detail.



Revised Date: 05-Jan-2018 V1.0