

Open Frame LCD

Open Frame LCD




6.5"(4:3)

Specifications



Model Name	R06L200-OFA1
Panel Size	6.5"
Active Display Area(mm)	132.48 (H) x 99.36 (V)
Resolution	640 x 480
Brightness(cd/m2)	700 (Typical)
Contrast Ratio	600:1 (Typical)
Viewing Angles(CR>=10 L/R/U/D)	-80~80(H) ; -70~70(V)
Display Colors	262K (6 bits/color)
Standard Input Signal	1 x VGA (D-sub 15) 1 x HDMI (Type-A)
Touch Screen(Optional-1)	Resistive Touch Protective Glass
Touch Interface	USB / RS232
Audio / Speakers (Optional)*	Audio line in (3.5mm) + Speaker x2
OSD	5 Keys: -, +, Power, Esc, Enter
Power Input	12V DC input (2.5ψ) with external AC-DC Adapter (100V~240V)
Power Consumption	15W typical, Normal operation
Operating temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	Power AC-DC Adapter(100V~240V) VGA cable (1.8m) HDMI cable (2m)

*Outside dimension and I/O will be different from standard

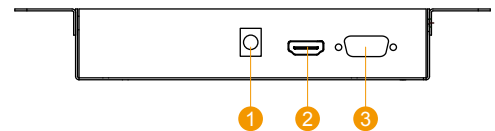


1. DC input
2. HDMI
3. VGA

I/O Optional

Optional 1*	1 x VGA (D-sub 15) 1 x S-Video 1 x Composite
-------------	----------------------------------------------------

Mechanical Drawing

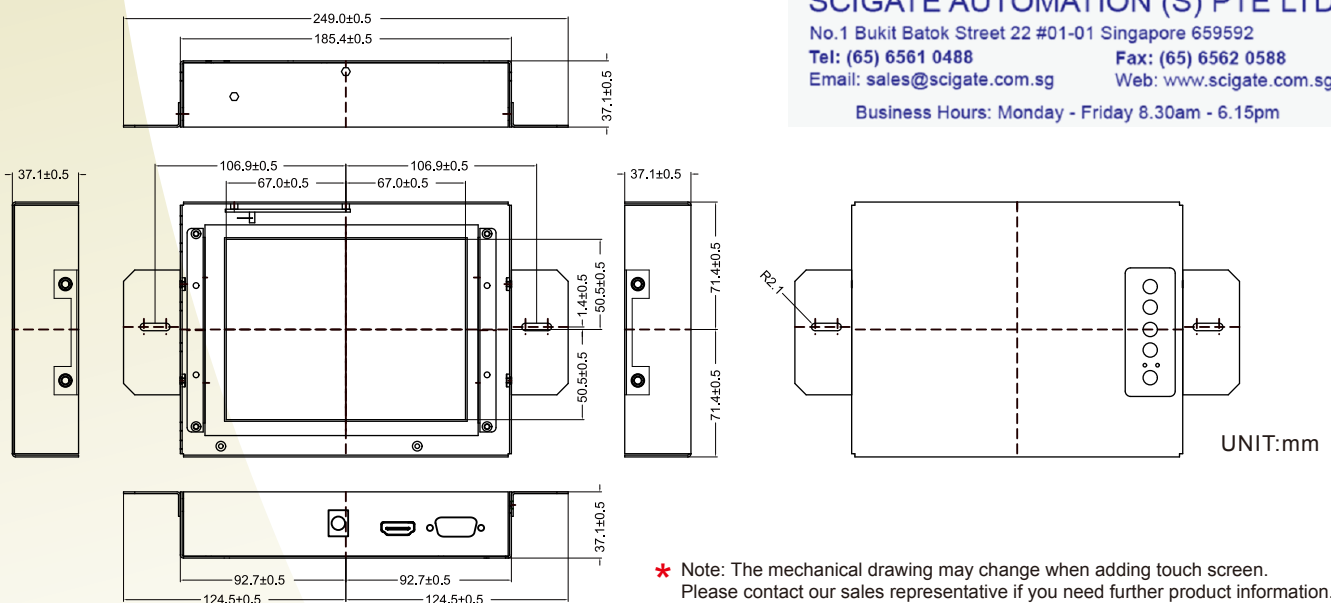

* Note: The mechanical drawing may change when adding touch screen. Please contact our sales representative if you need further product information.

SCIENCE GATE
Your Automation Partner



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm