Rear Mount LCD

Wide Temperature Range LCD

6.5"

RoHS COMPLIANT 2011/ 65/ EU

Specifications

Model Name	R06L200-RMA1WT
Panel Size	6.5"
Active Dipsplay Area(mm)	132.48 (H) x 99.36 (V)
Resolution	640 x 480
Brightness(cd/m2)	400 (Typical)
Contrast Ratio	450:1 (Typical)
Viewing Angles(CR>=10 L/R/U/D)	-80~80(H) ; -70~70(V)
Display Colors	262K (6 bits/color)
Standard Input Signal	1 x VGA (D-sub 15) 1 x HDMI (Type-A)
Touch Screen(Optional-1)	Resistive Touch Protective Glass
Touch Interface	USB / RS232
Audio / Speakers (Optional)*	Audio line in (3.5mm) + Speaker x2
OSD	5 Keys: - , + , Power , Esc , Enter
Power Input	12V DC input (2.5ψ) with external AC-DC Adapter (100V~240V)
Power Consumption	20W typical , Normal operation
Operating tempurature	-20~60℃
Storage Tempurature	-25~65℃
Accessories	Power AC-DC Adapter(100V~240V) VGA cable (1.8m) HDMI cable (2m)

*Outside dimension and I/O will be different from standard

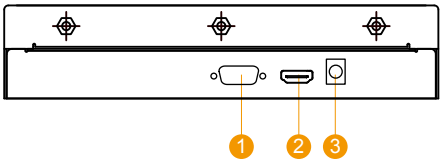

1. VGA
2. HDMI
3. DC input

I/O Optional	
Optional 1*	1 x VGA (D-sub 15) 1 x HDMI (Type-A) 1 x DVI-D
Optional 2*	1 x VGA (D-sub 15) 1 x DVI-D 1 x S-Video 1 x Composite

SCIENCE GATE Your Automation Partner
SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

Mechanical Drawing

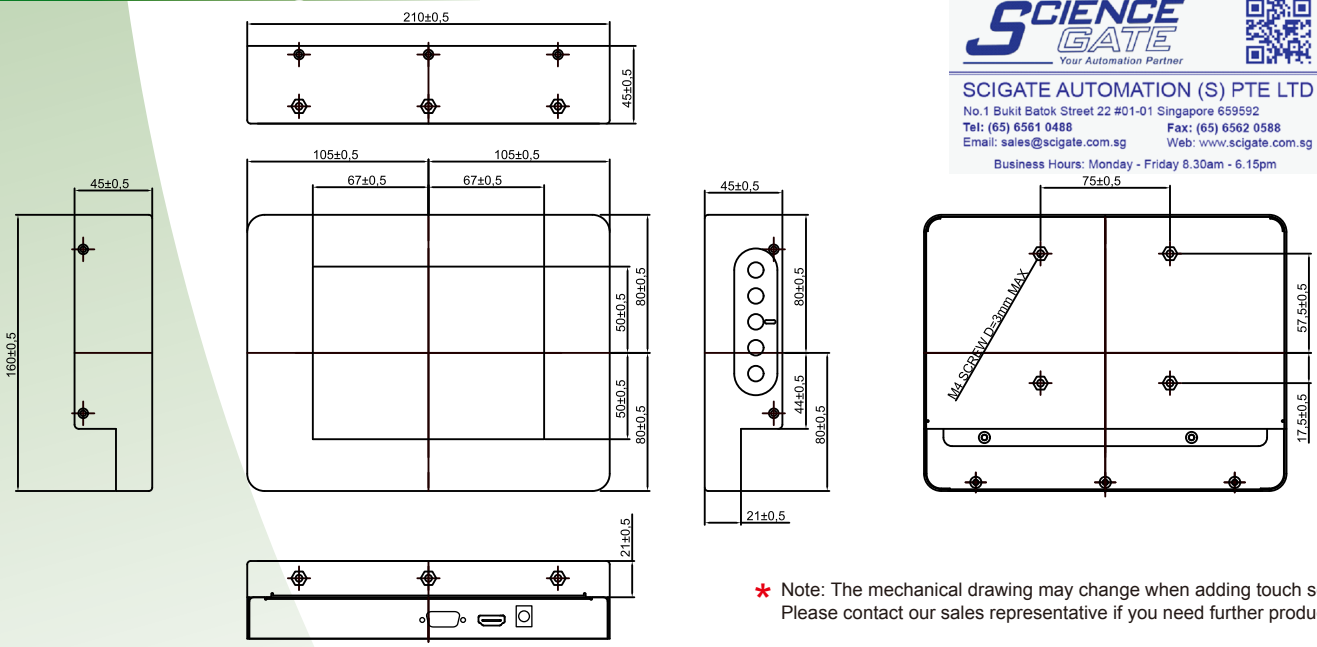

* Note: The mechanical drawing may change when adding touch screen.
Please contact our sales representative if you need further product information.

Revised Date:10-Nov-2017 V1.6