

# Rugged Panel PC



## Model:R10IB3S-VMT2

### Product Features:

- Ultra Low Bay Trail N2930 1.83GHz Processor Fanless Design
- High Quality 10.4" Panel, 1024 x 768 resolution
- Full IP65 Dust / Water Proof Enclosures (Except I/O parts)
- Aluminum Housing with Anti-Corrosion Treatments
- Anti-Shock and Vibration Standard according to MIL-STD-810 & IEC60068-2-27
- 5 Wire Resistive / Infrared Touchscreen / Anti-Reflective Protection Glass (Optional)
- Optional GPS, 3G / WLAN(Either one). Digital IO / Canbus (Either one)
- Wide Range 9 to 36V DC Input Acceptable
- Optional 6-60V DC Input, and Optional for Ignition On/Off delay
- Compliance with EN50155

### Product Specifications:



**SCIGATE AUTOMATION (S) PTE LTD**  
 No. 1 Bukit Batok Street 22 #01-01 Singapore 659592  
 Tel: (65) 6561 0488 Fax: (65) 6562 0588  
 Email: sales@scigate.com.sg Web: www.scigate.com.sg  
 Business Hours: Monday - Friday 8.30am - 6.15pm



Fanless




Wide Temp



IP65




### I / O View:

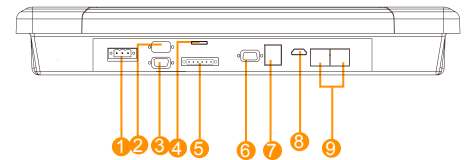

1. 9~36V Terminal Block
2. RS-232 (Optional)
3. RS-232
4. SIM Card Slot (Optional)
5. CanBus / DIO (Optional)
6. RS232/422/485
7. 1xUSB 3.0, 1xUSB 2.0
8. HDMI
9. 2xRJ45

### Front OSD Control Function:

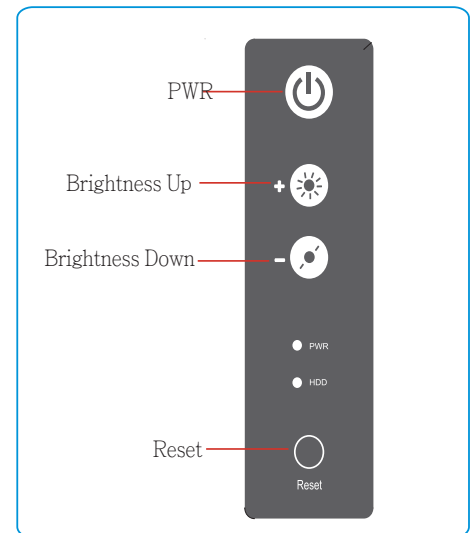

Display	Model Name	R10IB3S-VMT2
	Size	10.4"
	Resolution (pixels)	1024 x 768
	Number of Colors	16.2M ( 6 bits+FRC )
	Brightness (cd/m <sup>2</sup> )	350 (typ.)
	Contrast Ratio	1200 :1 (typ.)
	Viewing Angle	-88~88 (H) ; -88~88 (V)
	Active Area	201.4 (H) x 157.8 (V)
System	Touch (optional)	5 Wire Resistive / IR Touch
	Processor	Intel® Bay Trail N2930 1.83GHz Processor
	Chipset	Bay Trail SoC Chipset
	BIOS	AMI 16Mbit Flash
	Memory	1xDDR3L 1066 / 1333 MHz SO-DIMM Max. 8GB
	Ethernet	Intel® I210-AT GbE LAN
	Storage	mSATA SSD
	Expansion Slot	1 x Mini PCIe slot (for wireless module) 1 x Mini PCIe slot (for SATA SSD)
Input / Output	Back Panel I/O Port	2 x RJ-45 (10/100/1000 Mbps)
		1 x HDMI
		1 x DC-in Jack (Phoenix type)
		1 x USB 3.0, 1 x USB 2.0
		1 x RS232/422/485, 1 x RS232 WLAN antenna SMA in top (Optional)
Environment	Operating Temperature	-25 deg.C to 55 deg.C
	Storage Temperature	-30 deg C to 70 deg C
	Humidity	10% to 95% (non condensing)
	Shock*	Operating:30g for 18ms, 300m/s <sup>2</sup>
	Vibration*	Operating: 1.60/1.96/2.18 g rms for XYZ / 5-500Hz
	Power Input	9~36V DC in (Phoenix type) Optional 6-60V DC in, with Ignition On/Off delay
Mechanical	Power Consumption	32W typ.
	Dimensions (W x L x H)	315 mm x 250 mm x 67 mm
	Approximate Weight	3.3Kg*
*Weight of this device will be more or less depending upon actual component configuration		
Driver OS Support	Windows Embedded Standard 7 / Windows Embedded Standard 8*	
*For Windows Embedded 8, this panel pc supports the Metro UI, but does not support Snap View		
Packing List	(IB32) SBC Manual & Driver CD	
Product Optional Items	Mounting Bracket and Kits	One robust bracket with locking handle (Can adjust from -5 deg.C to 90 deg.C)
	Sunlight Readable	Transflective film enhancement for optional
	Anti-reflective Glass	3 mm (Replace touch)
	WLAN / 3G	Either one
	GPS	USB interface
	Digital IO / Canbus	Either one

### Drawing w / Mounting bracket:

