


# R10ID7T-IPT2 10.4" Panel PC (Intel® Atom Dual Core D2550+NM10 Platform)


Mechanical Design



IP65 (6 mm front bezel)

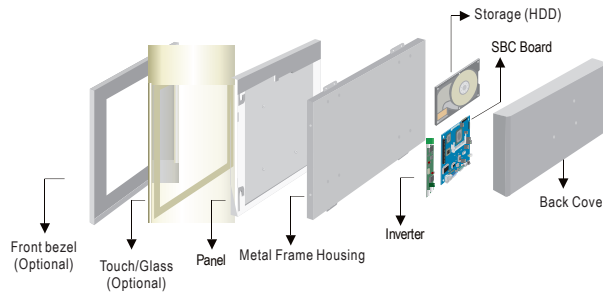

Mechanical design

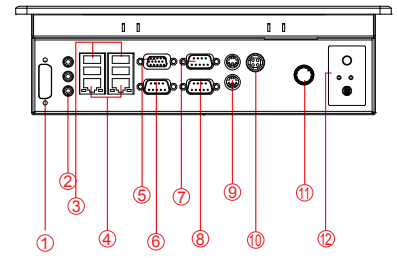


1. DVI (Optional)
2. Audio jack
3. USB
4. RJ-45
5. VGA Out
6. RS-232 Conn.
7. RS-232 Conn.
8. RS-232 Conn.
9. PS/2
10. DC-IN Power Jack
11. Brightness Adjustment Knob
12. Power / Reset


Fully Integrated I/O

## Dimensions


FRONT VIEW

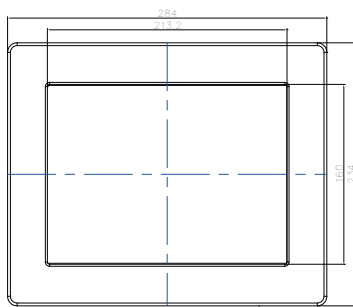


SIDE VIEW




BACK VIEW



CUT OUT

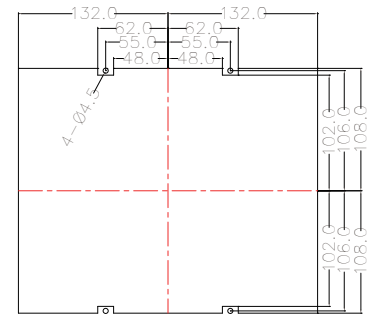

1:2



BOTTOM VIEW

- \* Measurements shown in mm
- \* Tolerance of all dimensions is shown as follow 0~30 mm ± 0.1 mm, 30~50 mm ± 0.15 mm, 50~120 mm ± 0.2 mm, above 120 mm ± 0.25 mm
- \* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

## Specifications

### System :

- CPU : Intel® Atom Dual Core D2550 1.86GHz Processor
- Memory Slot : DDR3 1600 MHz SO-DIMM Slot, Max. 4GB
- System Chipset : NM10
- Storage : 2 x SATA (up to 512GB)
- LAN : Dual Broadcom BCM57780 GbE controller
- Audio Codec : Realtek ALC886 HD Audio Codec

### Input / Output :

- Serial Ports : 2 x RS232, 1 x RS232/422/485
- USB Ports : 4 x USB Type-A Receptacle
- Keyboard / Mouse : 2 x PS/2
- Ethernet : 2 x RJ45-10/100/1000 Mbps
- VGA : 1 x VGA (female) • Default setting:RS232
- Audio : Line-out, Line-in, Mic in

### Expansion Slot :

- 2 x Mini PCIe (1 for WiFi, 1 for 3G Module), 1 x PCI  
\* A customized housing is needed if you would like to have the PCI expansion.

### Power Specifications :

- Power Input : 12V DC IN
- Power Consumption : 32W (typ.)(Max.backlight & high CPU load)

### Accessories :

- External Adapter : 110~240V Ac-in Power Adapter

### Panel Spec :

- Size/Type : 10.4" TFT
- Resolutions : 1024 x 768
- Brightness : 350 cd/m<sup>2</sup> (typ.)
- Contrast Ratio : 1200 : 1(typ.)
- Viewing Angle : -88~88(H);-88~88(V)
- Max. Colors : 16.2M(8 bits)

### Environment Considerations :

- Operating Temperature : 0 deg.C to 50deg.C
- Operating Humidity : 30% to 90% (non condensing)

### OS BSP / Driver Support :

- Support Windows 7 embedded / Windows XP embedded

### Order Options :

Mechanical : Open Frame Panel Mount(6 mm bezel) IP65(6 mm bezel)	Storage : 2.5" HDD / 2.5" SSD
Touch : 5-Wires Resistive(Optional)	RAM : DDR3 1600 Max 4GB
(A customized housing is needed if you have demands of SAW/IR/IT/SC touch)	OS : Windows 7 embedded / Windows XP embedded (Optional)



SCIGATE AUTOMATION (S) PTE LTD  
No.1 Bukit Batok Street 22 #01-01 Singapore 659592  
Tel: (65) 6561 0488 Fax: (65) 6562 0588  
Email: sales@scigate.com.sg Web: www.scigate.com.sg  
Business Hours: Monday - Friday 8.30am - 6.15pm

