


# R10ID7T-PMT2 10.4" Panel PC (Intel® Atom D2550+NM10 Platform)

Mechanical Design


Panel Mount (6 mm front bezel)



Mechanical design

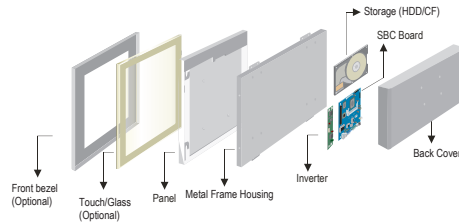

Dimensions

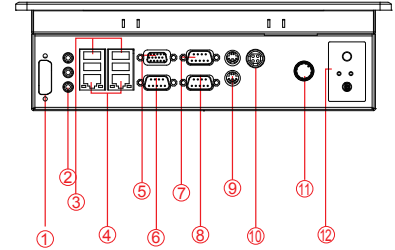

1. DVI (Optional)
2. Audio jack
3. USB
4. RJ-45
5. VGA Out
6. RS-232 Conn.
7. RS-232 Conn.
8. RS-232 Conn.
9. PS/2
10. DC-IN Power Jack
11. Brightness Adjustment Knob
12. Power / Reset





Fully Integrated I/O

FRONT VIEW


SIDE VIEW

BACK VIEW

CUT OUT

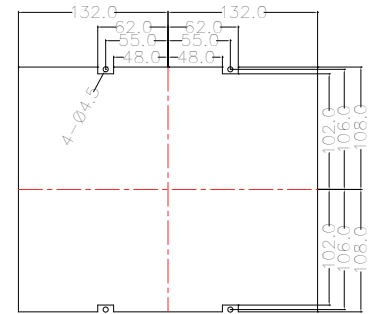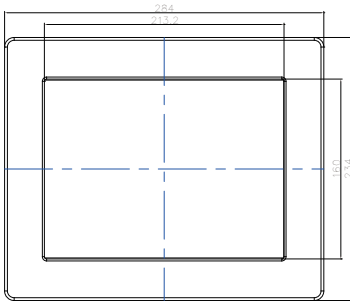

1:2



BOTTOM VIEW

## Specifications

### System :

- CPU : Intel® Atom D2550 1.86GHz Processor
- Memory Slot : DDR3 1600 MHz SO-DIMM Slot, Max. 4GB
- System Chipset : NM10
- IDE/SATA : 2 x SATA
- LAN : Dual Broadcom BCM57780 GbE controller
- Audio Codec : Realtek ALC886 HD Audio Codec

### Input / Output :

- Serial Ports : 2 x RS232, 1 x RS232/422/485
- USB Ports : 4 x USB Type-A Receptacle
- Keyboard / Mouse : 2 x PS/2
- Ethernet : 2 x RJ45-10/100/1000 Mbps
- VGA : 1 x VGA (female)
- Audio : Line-out, Line-in, Mic in • Default setting:RS232

### Expansion Slot :

- 2 x Mini PCIe (1 for WiFi, 1 for 3G Module), 1 x PCI
- \* A customized housing is needed if you would like to have the PCI expansion.

### Power Specifications :

- Power Input : 12V DC IN
- Power Consumption : 37W (typ.)(Max.backlight & high CPU load)

### Accessories :

- External Adapter : 110~240V Ac-in Power Adapter

### Panel Spec :

- Size/Type : 10.4" TFT
- Resolutions : 1024 x 768
- Brightness : 350 cd/m2 (typ.)
- Contrast Ratio : 1200 : 1(typ.)
- Viewing Angle : -88~88(H);-88~88(V)
- Max. Colors : 16.2M(8bits)

### Environment Considerations :

- Operating Temperature : 0 deg.C to 50 deg.C
- Operating Humidity : 30% to 90% (non condensing)

### OS BSP / Driver Support :

- Support Windows 7 embedded / Windows XP embedded

### Order Options :

Mechanical: Open Frame Panel Mount(6 mm bezel) Ip65 (6 mm bezel) Touch : 5-Wires Resistive(Optional)	Storage : 2.5" HDD/ 2.5" SSD RAM : DDR3 1600 Max 4GB OS : Windows 7 embedded / Windows XP embedded (Optional)
---	---

(A customized housing is needed if you have demands of SAW/IR/IT/SC touch)



**SCIGATE AUTOMATION (S) PTE LTD**

No.1 Bukit Batok Street 22 #01-01 Singapore 659592  
 Tel: (65) 6561 0488 Fax: (65) 6562 0588  
 Email: sales@scigate.com.sg Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm



11-Aug-2016 V1.2

Note: All Specifications are subject to change without prior notice!