

CANBUS Rugged Tablet PC ID83



Model : R10ID8M-RTT2CA

Intel® Atom Dual Core N2800 1.86GHz

Features:

- 10.4" High Quality 1024 x 768 Resolution LED Panel
- Intel® Atom Dual Core N2800 1.86Ghz with Intel® NM10 Chipset
- 1 x SODIMM, Max. 4GB DDR3 (Default 2GB)
- Alu-Mg Alloy Housing with Protection Rubber for MIL-810G Shock, Vibration and Drop
- Built-in Wireless 802.11 a/b/g/n and Bluetooth 4.0+Class I Combo card
- Support 2 channels isolated CANBUS and 1 COM port for RS 232, 1 x SIM card slot
- Ergonomic Design with Handstrip and Carry Belt Accessories (for Optional)
- 6cell, 5200mAh Lithium-Ion Battery Pack

Mechanical Design Drawings

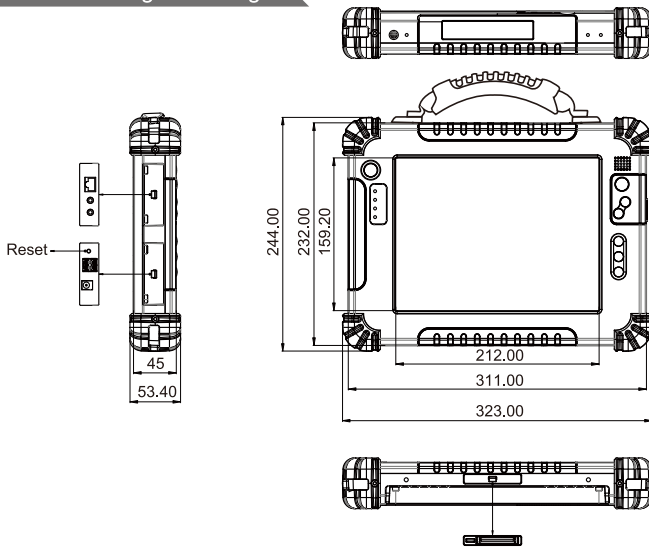

| Pin No. | Symbol | Description |
|---------|-------------|---------------------------|
| 1 | GND_ISO_A | A port Isolated Ground |
| 2 | CANL_1_CONN | A port CAN Bus Low-level |
| 3 | CANH_1_CONN | A port CAN Bus High-level |
| 4 | GND_ISO_B | B port Isolated Ground |
| 5 | CANL_2_CONN | B port CAN Bus Low-level |
| 6 | CANH_2_CONN | B port CAN Bus High-level |

System Specification

- Processor : Intel® Atom Dual Core N2800 1.86GHz
- BIOS : AMI System BIOS
- System Chipset : Intel® NM10 Chipset
- System Memory : 1 x SODIMM, Max 4GB DDR3 (Default 2GB)
- LAN Controller : 10/100/1000 Mbps LAN
- Storage : 32GB mSATA SSD (Max.up to 256GB)
- Audio : Audio out for headset, Micro in for microphone jack, 1.5W Speaker(Internal)

Wireless Communication

- WLAN&Bluetooth : 802.11a/b/g/n + 2T2R & Bluetooth 4.0 + Class I combo card (Default)
- WWAN : Built-in 3G module
- GPS : U-Blox Neo-6Q

Mechanical and Environment

- Dimensions (W x L x H) : 311 x 232 x 45 mm
- Weight : 2.5Kg(w/o accessories)
- Operation Temperature : -20~60 (AC mode), -10~50 (Battery mode)
- Operation Humidity : 10% to 90% (non condensing)
- IP Proof : IP55(Optional IP65)
- Mounting : VESA mount, Vehicle mount
- Shock* : MIL-STD-810G M516.6
- Vibration* : MIL-STD-810G M514.6
- Drop* : MIL-STD-810G M516.6, 4 ft, Free to concrete
- Certifications : CE, FCC ClassB,UL

Display Specification

- Pixel Number : 1024 x 768
- Brightness : 700cd/m²
- Touch (Default) : 4 Wire Resistive

I/O Connectors

- Left I/O Port : 1 x LAN, 2 x USB 2.0, 1 x Audio out, Mic-in Jack, 1 x Power Input Jack, 1 x Reset Button
- Right I/O Port : 1 x 6 pin Terminal Block for 2 CH CANbus, 1 x COM port, 1 x SIM card slot
- Downside Docking : 1 x Docking connector for expansion 4x USB, and Docking Stand Power input

In front Control

- Control Button : 1x Menu Key control Brightness, Volume and Battery Status
- LED indicator : Power On/ Off, Battery, HDD Access, Wifi On / Off

Power Management

- Power input : 19V DC
- Power consumption : 12.5W typ.
- Battery : Li-Ion battery 5200mAh, 11.1V
- Battery Hours : 7 hrs **
- Adapter : 100-240V, 50-60Hz, 19V DC



SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.
**Note: Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.