

Rugged Panel PC



Model:R10IH3S-VMT2

Product Features:

- Intel Core i5-5200U Broadwell 2.2GHz (turbo to 2.7GHz)
- High Quality 10.4" Panel, 1024 x 768 resolution
- Full IP65 Dust / Water Proof Enclosures (Except I/O parts)
- Aluminum Housing with Anti-Corrosion Treatments
- Anti-Shock and Vibration Standard according to MIL-STD-810F/G & IEC60068-2-27
- 5 Wire Resistive / Infrared Touchscreen / Anti-Reflective Protection Glass (Optional)
- Optional GPS, 3G / WLAN(Either one). Digital IO / Canbus (Either one)
- Wide Range 9 to 36V DC Input with isolation
- Optional 6-60V DC Input, and Optional for Ignition On/Off delay
- Compliance with EN50155 for EMC & Characteristic

Product Specifications:




SCIGATE AUTOMATION (S) PTE LTD
 No.1 Bukit Batok Street 22 #01-01 Singapore 659592
 Tel: (65) 6561 0488 Fax: (65) 6562 0588
 Email: sales@scigate.com.sg Web: www.scigate.com.sg
 Business Hours: Monday - Friday 8.30am - 6.15pm




Display	Model Name	R10IH3S-VMT2
	Size	10.4"
	Resolution (pixels)	1024 x 768
	Number of Colors	16.2M (6 bits+FRC)
	Brightness (cd/m ²)	350 (typ.)
	Contrast Ratio	1200 :1 (typ.)
	Viewing Angle	-88~88 (H) ; -88~88 (V)
	Active Area	210.4 (H) x 157.8 (V)
System	Touch (optional)	5 Wire Resistive / IR Touch
	Processor	Intel Core i5-5200U Broadwell 2.2GHz (turbo to 2.7GHz)
	BIOS	AMI System BIOS
	Memory	1xDDR3L 1600 MHz SO-DIMM default 4 GB, Max. 16GB
	Ethernet	Intel® Ethernet Controller 1211-AT + Intel® Gigabit Ethernet PHY 1218-LM
	Storage	Default 64GB mSATA MLC SSD
Input / Output	Expansion Slot	1 x Mini PCIe slot (for USB module)
	Back Panel I/O Port	2 x RJ-45 (10/100/1000 Mbps)
		1 x HDMI
		1 x DC-in Jack (Phoenix type)
2 x USB 3.0		
Environment	Operating Temperature	-25 deg.C to 55 deg.C
	Storage Temperature	-30 deg C to 70 deg C
	Humidity	10% to 95% (non condensing)
	Shock*	Operating:30g for 18ms, 300m/s ²
	Vibration*	Operating: 1.60/1.96/2.18 g rms for XYZ / 5-500Hz
	Power Input	9~36V DC in with isolation (Phoenix type) Optional 6-60V DC in, with Ignition On/Off delay
	Power Consumption	32W typ.
Mechanical	Dimensions (W x L x H)	315 mm x 250 mm x 67 mm
	Approximate Weight	3.3Kg*
*Weight of this device will be more or less depending upon actual component configuration		
Driver OS Support	Windows Embedded Standard 7 (64-bit) Windows Embedded 8.1 Industry Pro 64-bit Windows 10 IoT Enterprise	
Packing List	(IH32) SBC Manual & Driver CD	
Product Optional Items	Mounting Bracket and Kits	One robust bracket with locking handle (Can adjust from -5 deg.C to 90 deg.C)
	Sunlight Readable	Transflective film enhancement for optional
	Anti-reflective Glass	3 mm (Replace touch)
	WLAN / 3G	Either one
	GPS	USB interface
Security Support	Trusted Platform Module (TPM 1.2)	

I / O View:

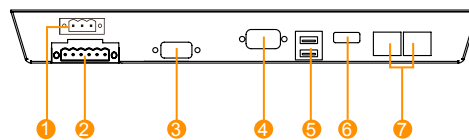

1. 9~36V Terminal Block
2. CanBus / DIO (Optional)
3. RS232
4. RS232/422/485
5. 2xUSB 3.0
6. HDMI
7. 2xLAN

Front OSD Control Function:

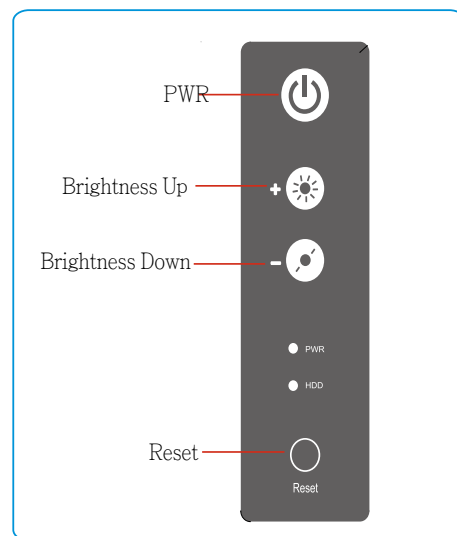

Drawing w / Mounting bracket:

