


R12ID7T-OFM2 12.1" Panel PC (Intel Atom® Dual Core D2550+NM10 Platform)


Mechanical Design




Open Frame

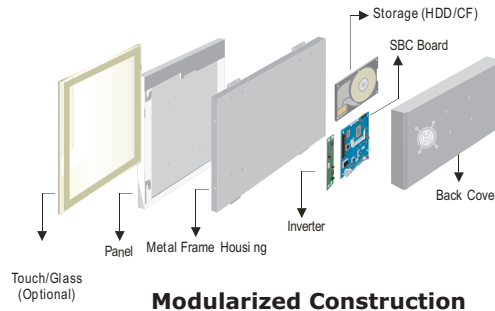

Modularized Construction

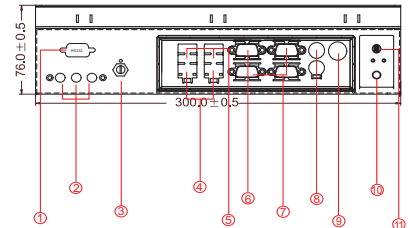

1. RS-232 Conn.(Optional)
2. Audio Jack
3. Brightness Adjustment Knob
4. RJ-45
5. USB
6. VGA Out
7. RS-232 Conn.
8. PS/2
9. DC-IN Lockable Power Jack
10. Power On Button
11. Power Reset Button

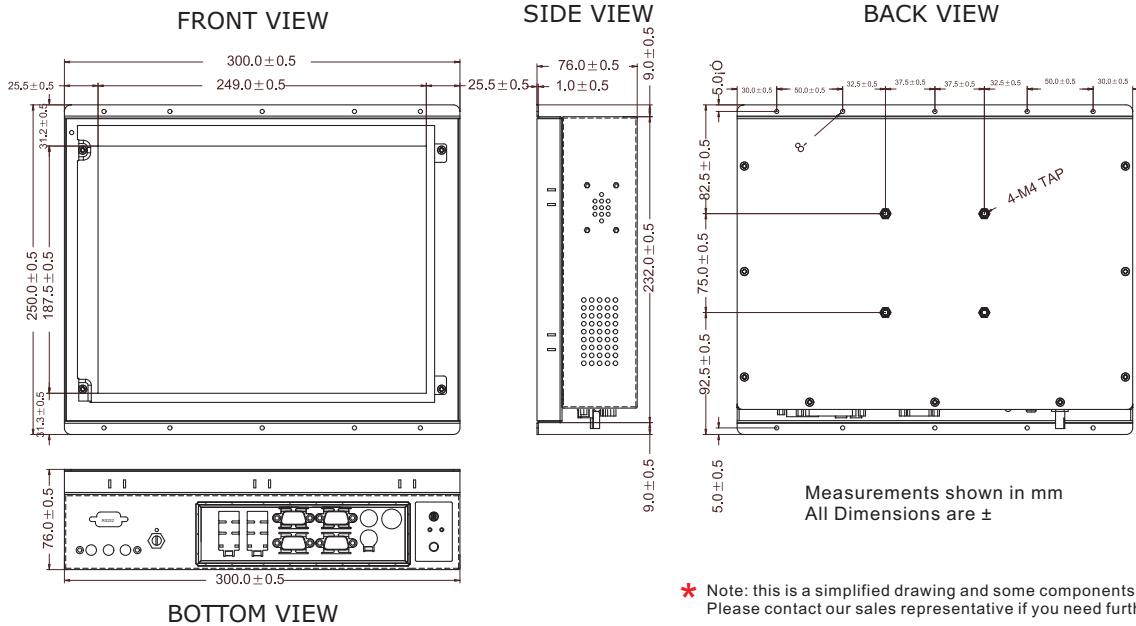

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Specifications

System :

- CPU : Intel® Atom Dual Core D2550 1.86GHz Processor
- Memory Slot : DDR3 1066 MHz SO-DIMM Slot, Max. 4GB
- System Chipset : NM10®
- IDE/SATA : 2 x SATA
- LAN : Dual Broadcom BCM57780 GbE controller
- Audio Codec : Realtek ALC886 HD Audio Codec

Input / Output :

- Serial Ports : 2 x RS232, 1 x RS232/422/485
- USB Ports : 4 x USB Type-A Receptacle
- Keyboard / Mouse : 2 x PS/2
- Ethernet : 2 x RJ45-10/100/1000 Mbps
- VGA : 1 x VGA (female)
- Audio : Line-out, Line-in, Mic in

• Default setting:RS232

Expansion Slot :

- 2 x Mini PCIe (1 for WiFi, 1 for 3G Module), 1 x PCI
- * A customized housing is needed if you would like to have the PCI expansion.

Power Specifications :

- Power Input : 12V DC IN (Lockable Power Jack)
- Power Consumption : 33W (typ.)(Max.backlight & high CPU load)

Accessories :

External Power Supply 80W w/power cord

Panel Spec :

- Size/Type : 12.1" TFT
- Resolutions : 1024 x 768
- Brightness : 500 cd/m² (typ.)
- Contrast Ratio : 700 : 1(typ.)
- Viewing Angle : -80~80(H);-70~70(V)
- Max. Colors : 16.2M colors

Environment Considerations :

- Operating Temperature : 0 deg.C to 45deg.C
- Operating Humidity : 30% to 90% (non condensing)

OS BSP / Driver Support :

- Support Windows 7 embedded / Windows XP embedded

Order Options :

Mechanical : Open Frame Panel Mount(5 mm bezel) IP65(10 mm bezel)	Storage : 2.5" HDD/ 2.5" SSD
Touch : 5-Wires Resistive(Optional)	RAM : DDR3 1066 Max 4GB
(A customized housing is needed if you have demands of SAW/IR/IT/SC touch)	OS : Windows 7 embedded / Windows XP embedded (Optional)



SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm



Revised Date:04/30/2013

Note: All Specifications are subject to change without prior notice!