


R12IV7T-IPM2 12.1" Panel PC (Intel® 3rd Generation Core™ i7 / i5 / i3)


Mechanical Design



IP65 (6mm front bezel)

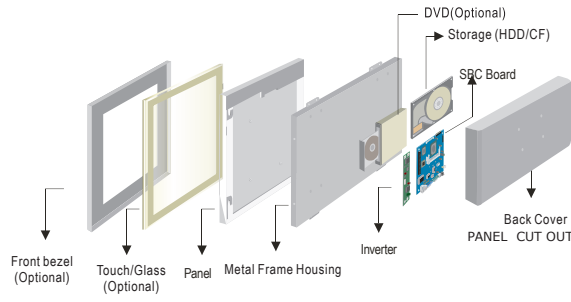

Mechanical design

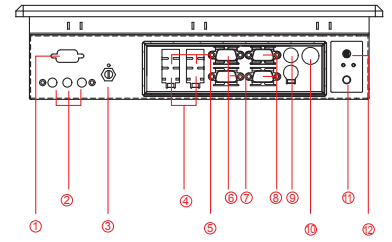

1. RS-232 Conn. (Optional)
2. Audio Jack
3. Brightness Adjustment Knob
4. RJ-45
5. USB
6. VGA Out
7. RS-232/422/485
8. 2 x RS-232 Conn.
9. PS/2
10. DC-IN Lockable Power Jack
11. Power On Button
12. Power Reset Button

Fully Integrated I/O




FRONT VIEW

Dimensions

SIDE VIEW

BACK VIEW

IP65 CUT OUT

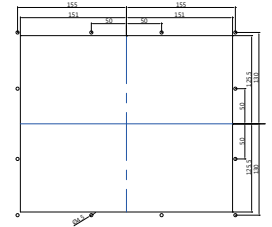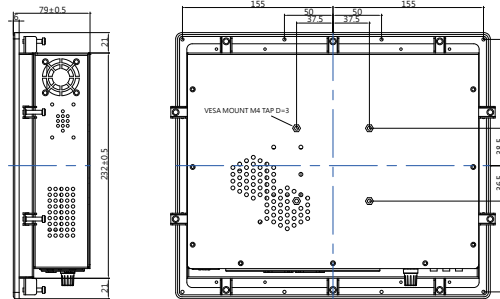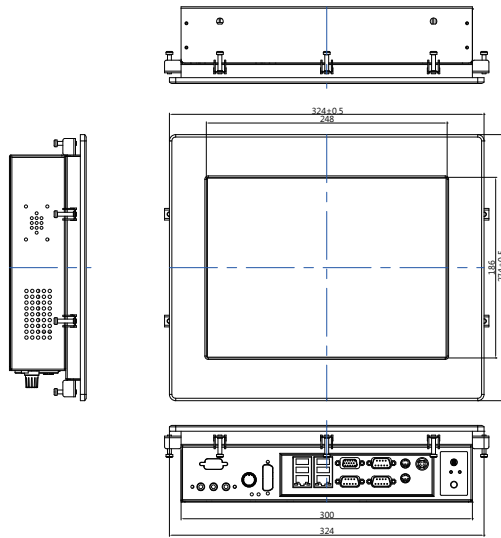

BOTTOM VIEW

- * Measurements shown in mm
- * All Dimensions are ± 0.5 mm
- * Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Specifications

System :

- CPU : Intel® 3rd Generation Core™ i7/i5/i3
- Memory : 2 x SO-DIMM, Max 16GB DDR3 1333/1600
- System Chipset : Intel® HM76 Chipset
- Storage : 1 x SATAIII, 1 x SATAII, 1 x mSATA
- LAN : Dual Broadcom BCM57780 GbE
- Audio Codec : Realtek ALC886 HD Audio Codec

Panel Spec :

- Size/Type : 12.1" TFT
- Resolutions : 1024 x 768
- Brightness : 500 cd/m² (typ.)
- Contrast Ratio : 700 : 1 (typ.)
- Viewing Angle : -80~80(H); -70~70(V)
- Max. Colors : 16.2M

Input / Output :

- Serial Ports : 2 x RS232, 1 x RS232/422/485
- USB Ports : 4 x USB 3.0 Type-A Receptacle
- Keyboard / Mouse : 2 x PS/2
- Ethernet : 2 x RJ 45-10/100/1000 Mbps
- VGA : 1 x VGA (female)
- Audio : Line-Out, Line-In, Mic in

• Default setting: RS232

Environment Considerations :

- Operating Temperature : 0°C to 50°C
- Operating Humidity : 30% to 90% (non condensing)

OS BSP / Driver Support :

- Support Windows 7 Embedded / Windows XP Embedded / Windows 8 Embedded

Expansion Slot :

- 1 x PCI-E(x16), 2 x Mini PCI-E (1for WiFi, 1 for 3G Module)

Power Specifications :

- Power Input : 12V DC IN (Lockable Power Jack)
- Power Consumption : 53W (typ.) (Max. backlight & high CPU load)

Accessories :

- External Power Supply 110~240V AC-in 12V DC-Output power adapter

Order Options :

Mechanical : Front IP65(6mm bezel)

Touch : 5-Wires Resistive or AR Glass either one

CPU : Check with Sales
Storage : 2.5" HDD/SSD/
RAM 4GB/8GB
RAM : SODIMM DDR3
OS : Windows XP Embedded
Windows 7 Embedded
Windows 8 Embedded

(A customized housing is needed if you have demands of SAW/IR/SC touch)

SCIGATE
Your Automation Partner

SCIGATE AUTOMATION (S) PTE LTD
No. 1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

