

Feature:

- ◆ Ultra Low Power Atom D2550 1.86GHz Processor Fanless Design
- ◆ High Quality 15" Panel, 1024*768 resolution, 800 nits
- ◆ Aluminum Die-casting Housing with Anti-Corrosion Treatments
- ◆ Military Grade connector with VESA mount.
- ◆ MIL-STD-810F/G Compliant
- ◆ Build in ambient Light sensor
- ◆ Wide Range 9 to 36V DC Input Acceptable

Option feature:

- ◆ Optical Bonding with Anti-moisture treatment (Optional)
- ◆ 5 Wire Resistive Touch/ Anti-Reflective Protection Glass
- ◆ MIL-STD-461E/F (By Request)
- ◆ EMI Glass/Touch (By Request)



System Specifications

Processor	: Intel [®] Atom Dual-Core D2550 1.86GHz Processor
BIOS	: AMI System BIOS
System Chipset	: Intel [®] NM10 Chipset
System Memory	: 1 x SODIMM DDR3 2GB, default 2GB, Max. 4GB
Wireless (Optional)	: IEEE802.11 b/g/n for optional
LAN Controller	: Dual Broadcom BCM57780 GigaLAN
Storage	: mSATA SSD, default 32GB
Expansion Slot	: 1 x Mini PCIe

Display Specification

Size	: 15 inch
Resolution	: 1024x768 pixels
Brightness	: 1000 (nits)
Touch or Glass	: 5 Wire Resistive / AR Glass

In Front Control

Control button: Power On/ Off, Reset, Brightness up & down, Lock & unlock, Auto-dimming & manual dimming, Day & night mode, LED adjustment

LED indicator : Power Status, HDD Status

Certifications

CE/FCC Class B
MIL810F/G / IEC60068-2-27 for Vibration /Shock

Mechanical and Environment

Dimensions (W x L x H) : 398 mm x 308 mm x 58mm
 Operation Temperature : -10deg. C to 55 deg. C
 Operation Humidity : 10% to 95% (non condensing)
 Shock : Operating: 40g for 11ms
 Vibration : Operating: 1.62/2.02/2.20g rms for XYZ / 5-500Hz




SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
 Tel: (65) 6561 0488 Fax: (65) 6562 0588
 Email: sales@scigate.com.sg Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

Front OSD control function:

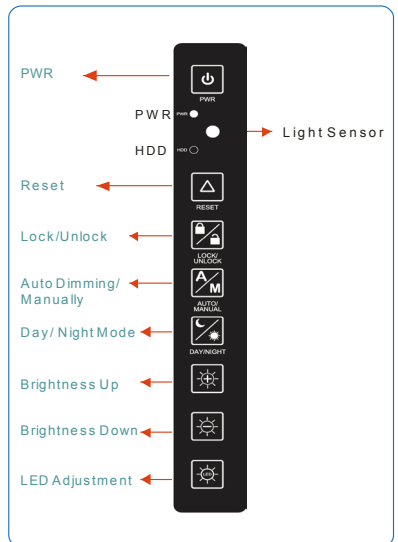

Drawing w/ Mounting Bracket

