Panel Mount LCD

STAINLESS LCD

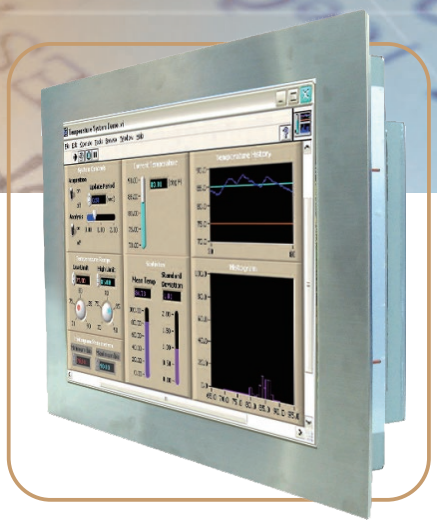

15"

RoHS COMPLIANT 2011/65/EU

Specifications

Model Name	R15L100-STA3
Viewable Size Image	15"
Active Display Area(mm)	304.1(H) x 228.1(V)
Pixel Pitch(mm)	0.297(H) x 0.297(V)
Number of Pixels	1024 x 768
Contrast Ratio	700:1(typ.)
Display Color	16.2M/262K
Brightness(cd/m²)	400(typ.)
Viewing Angle(CR>=10)	-80~80(H);-70~70(V)
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	20W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive

Remarks:R15L100 series= VGA input only
R15L110 series= VGA+Video Input

SCIENCE GATE
Your Automation Partner
SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

Mechanical Drawing

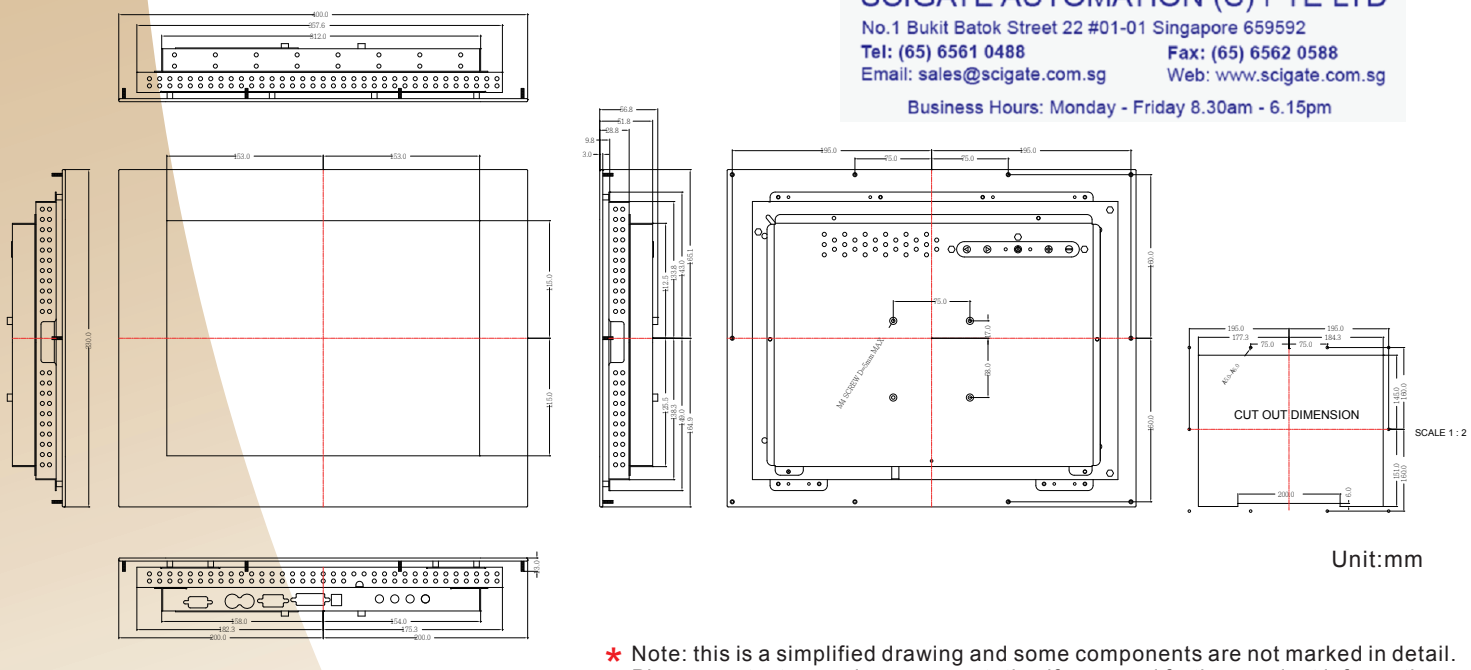

Unit:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Revised date: 22-Aug-2016 V1.2