


R17IH7T-OFM1 17" Panel PC (Intel 4th Generation Core™ i5)


Mechanical Design



Open Frame

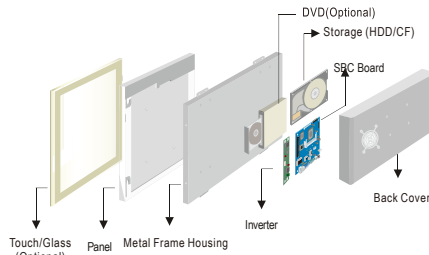


Modularized Construction

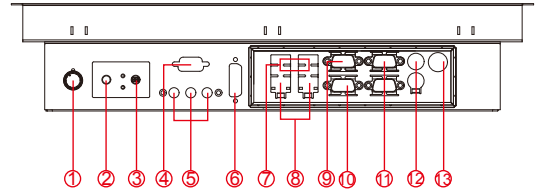

- | | |
|-------------------------------|------------------------|
| 1. Brightness Adjustment Knob | 8. LAN |
| 2. Power On Button | 9. VGA |
| 3. Power Reset Button | 10. RS232/422/485 Conn |
| 4. RS-232 Conn. (Optional) | 11. RS-232 Conn. |
| 5. Audio Jack | 12. PS/2 |
| 6. DVI (Optional) | 13. DC-in Power |
| 7. USB | |

Fully Integrated I/O

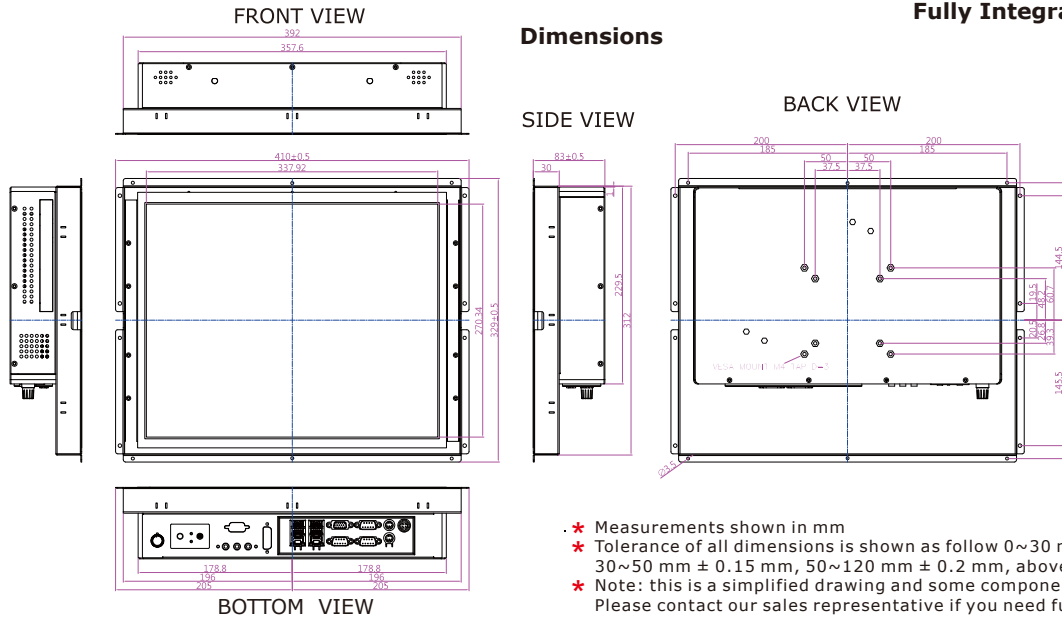

Dimensions

- * Measurements shown in mm
- * Tolerance of all dimensions is shown as follow 0~30 mm ± 0.1 mm, 30~50 mm ± 0.15 mm, 50~120 mm ± 0.2 mm, above 120 mm ± 0.25 mm
- * Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Specifications

System :

- CPU : Intel® 4th Generation Core™ i5-4200M 3.1GHz Processor
- Memory Slot : 2 x SO-DIMM, Max 16GB DDR3L 1333/1600
- System Chipset : Intel® QM87 Chipset
- IDE/SATA : 2 X SATA III
- LAN : Intel® Ethernet Controller I211-AT + Intel® Gigabit Ethernet PHY I218-LM
- Audio Codec : Realtek ALC886 HD Audio Codec

Input / Output :

- Serial Ports : 2 x RS232, 1 x RS232/422/485
 - USB Ports : 4 x USB 3.0
 - Keyboard / Mouse : 2 x PS/2
 - Ethernet : 2 x RJ45-10/100/1000 Mbps
 - VGA : 1 x VGA (female)
 - Audio : Line-out, Line-in, Mic in
- Default setting:RS232

Expansion Slot :

- 2 x Mini PCIe (1 for WiFi, 1 for 3G Module), 1 x PCIe x 16
- *Customized housing required if you need to have the PCI expansion

Power Specifications :

- Power Input : 12V DC IN (Lockable Power Jack)
- Power Consumption : 63W (typ.)(Max.backlight & high CPU load)

Accessories :

- External Adapter : 110~240V Ac-in Power Adapter

Panel Spec :

- Size/Type : 17" TFT
- Resolutions : 1280 x 1024
- Brightness : 350 cd/m² (typ.)
- Contrast Ratio : 1000 : 1(typ.)
- Viewing Angle : -85~85(H);-80~80(V)
- Max. Colors : 16.7M (6bits+FRC)

Environment Considerations :

- Operating Temperature : 0 °C to 50 °C
- Operating Humidity : 30% to 90% (non condensing)

Security Support

- Trusted Platform Module (TPM 1.2)

Order Options :

Mechanical : Open Frame Panel Mount(8 mm bezel) IP65(8 mm bezel)	Storage : 2.5" HDD/ mSATA SSD
Touch : 5-Wires Resistive(Default) AR Glass(Optional)	RAM : SODIMM DDR3L
	OS : Windows 10 IoT Enterprise Windows 8 Embedded Windows 7 Embedded
(Customized housing required if you have the demand of SAW/IR/IT/SC touch)	DVD : Yes (Optional)



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
 Tel: (65) 6561 0488 Fax: (65) 6562 0588
 Email: sales@scigate.com.sg Web: www.scigate.com.sg
 Business Hours: Monday - Friday 8.30am - 6.15pm



27-Jun-2016 V1.1