


# R19IB7T-OFM1 19" Panel PC (Intel Celeron Bay Trial-M N2930 1.83GHz)


## Mechanical Design



Open Frame

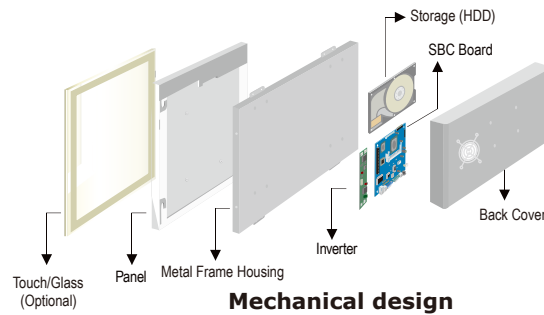


Mechanical design

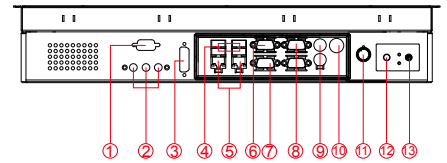

1. RS-232 Conn. (Optional)
2. Audio Jack
3. DVI (Optional)
4. USB(1 x 3.0, 3 x 2.0)
5. LAN
6. VGA
7. RS232/422/485 Conn
8. RS-232 Conn.
9. PS/2
10. 12V DC-in
11. Brightness Adjustment Knob
12. Power On Button
13. Power Reset Button

## Dimensions

## Fully Integrated I/O

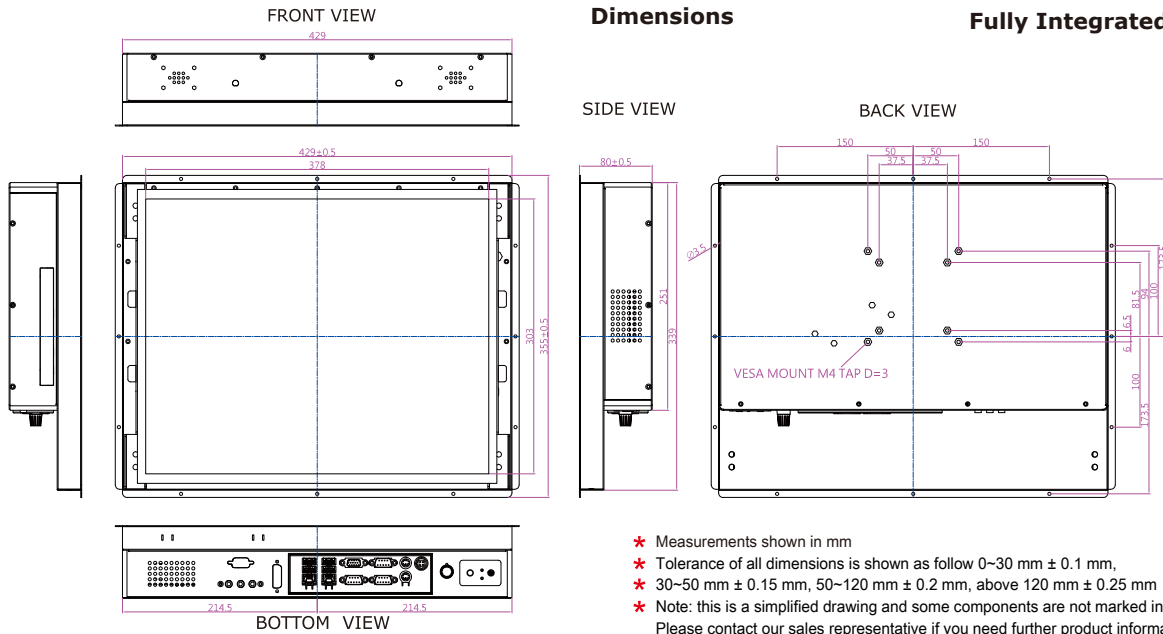

- \* Measurements shown in mm
- \* Tolerance of all dimensions is shown as follow 0~30 mm  $\pm$  0.1 mm,
- \* 30~50 mm  $\pm$  0.15 mm, 50~120 mm  $\pm$  0.2 mm, above 120 mm  $\pm$  0.25 mm
- \* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

## Specifications

### System :

- CPU : Intel® Celeron® Bay Trial-M N2930 1.83GHz
- Memory Slot : SODIMM DDR3L1600/1333max.8G
- System Chipset : Intel® Atom SoC Integrated
- IDE/SATA : 1 x SATA II
- LAN : Intel® I210-AT GbE LAN x 2
- Audio Codec : Realtek ALC886 HD Audio Codec

### Input / Output :

- Serial Ports : 2 x RS232, 1 x RS232/422/485
  - USB Ports : 1 x USB 3.0, 3 x USB 2.0
  - Keyboard / Mouse : 2 x PS/2
  - Ethernet : 2 x RJ 45-10/100/1000 Mbps
  - VGA : 1 x VGA (female)
  - Audio : Line-Out, Line-In, Mic in
- Default setting:RS232

### Expansion Slot :

- 2 x Mini PCIe (1 for WiFi, 1 for 3G Module)
- 1 x eDP by 2x10 DF-13 connector

### Power Specifications :

- Power Input : 12V DC IN
- Power Consumption : 60W (typ.)(Max.backlight & high CPU load)

### Accessories :

- External Adapter : 110~240V Ac-in Power Adapter

### Panel Spec :

- Size/Type : 19" TFT
- Resolutions : 1280 x 1024
- Brightness : 250 cd/m<sup>2</sup>(typ.)
- Contrast Ratio : 1000 : 1(typ.)
- Viewing Angle : -85~85(H);-80~80(V)
- Max. Colors : 16.7M (8 bits/colors)

### Environment Considerations :

- Operating Temperature : 0 °C to 50 °C
- Operating Humidity : 30% to 90% (non condensing)

### OS BSP / Driver Support :

- Support Windows 10 IoT Enterprise / Windows embedded 8 / Windows embedded 7

### Security Support

- Trusted Platform Module (TPM 1.2)

### Order Options :

Mechanical : Open Frame Panel Mount(8 mm bezel) IP65(8 mm bezel)	Storage : 2.5" HDD/ mSATA SSD RAM : SODIMMDDR3L 1600/1333max.8G
Touch : 5 Wires Resistive(Optional) AR Glass(Optional) (A customized housing is needed if you have demands of SAW/IR/SC touch)	OS : Windows 10 IoT Enterprise Windows 7 embedded / Windows 8 embedded (Optional)



SCIGATE AUTOMATION (S) PTE LTD  
No. 1 Bukit Batok Street 22 #01-01 Singapore 659592  
Tel: (65) 6561 0488 Fax: (65) 6562 8588  
Email: sales@scigate.com.sg Web: www.scigate.com.sg  
Business Hours: Monday - Friday 8.30am - 6.15pm



Revised date: 13-Jul-2017 V1.4

Note: All Specifications are subject to change without prior notice!