

P-Cap Panel Mount LCD Front side IP65



19" P-Cap LCD


Specifications

**RoHS
COMPLIANT
2011/65/EU**

Model Name	R19L300-PPA1HB
Viewable Size Image	19"
Active Display Area (mm)	376.32 (H) x 301.056 (V)
Pixel Pitch (mm)	0.294 (H) x 0.294 (V)
Number of Pixels	1280 x 1024
Contrast Ratio	1000:1(typ.)
Display Color	16.7M (8 bits/colors)
Brightness (cd/m ²)	1000(typ.)
Viewing Angle (CR>=10)	-85~85 (H);-80~80 (V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280 x 1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	27W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Touch Screen	Projective Capacitive multi-touch
Operating Temperature	0 deg. C to 50 deg. C

Remarks: R19L300 series= VGA input only
R19L340 series= VGA+Video Input

Mechanical Drawing

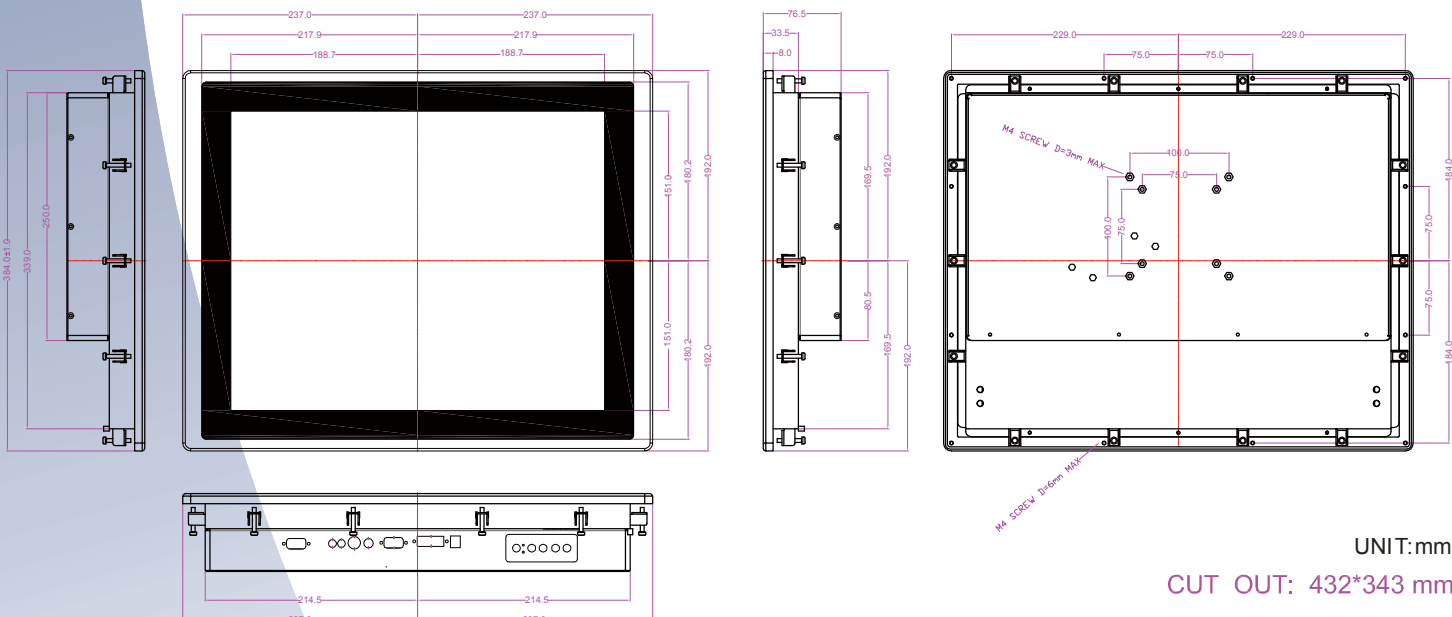

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm