

Rack Mount LCD

Rack Mount LCD




19" (9U)

Specifications



| | |
|--------------------------------|-----------------------------------------------------------------------|
| Model Name | R19L300-RKM1 |
| Panel Size | 19" |
| Active Display Area(mm) | 376.32(H)x301.06(V) |
| Resolution | 1280x1024 |
| Brightness(cd/m2) | 250 (Typical) |
| Contrast Ratio | 1000:1 (Typical) |
| Viewing Angles(CR>=10 L/R/U/D) | -85~85(H) ; -80~80(V) |
| Display Colors | 16.7M (8 bits/color) |
| Standard Input Signal | 1 x VGA (D-sub 15) 1 x HDMI (Type-A) |
| Touch Screen(Optional-1) | Resistive Touch Protective Glass |
| Touch Screen(Optional-2)* | SAW Touch (Surface Acoustic Wave) |
| Touch Interface | USB / RS232 |
| Audio / Speakers (Optional)* | Audio line in (3.5mm) + Speaker x2 |
| OSD | 5 Keys: -, +, Power, Esc, Enter |
| Power Input | 12V DC input (2.5ψ) with external AC-DC Adapter (100V~240V) |
| Power Consumption | 27W typical, Normal operation |
| Operating temperature | 0~50°C |
| Storage Temperature | -10~60°C |
| Accessories | Power AC-DC Adapter(100V~240V) VGA cable (1.8m) HDMI cable (2m) |

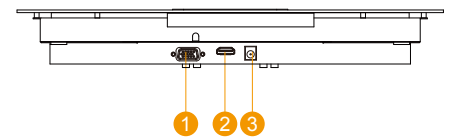


1. VGA
2. HDMI
3. DC input

I/O Optional

| | |
|-------------|-----------------------------------------------------------------|
| Optional 1* | 1 x VGA (D-sub 15) 1 x HDMI (Type-A) 1 x DVI-D |
| Optional 2* | 1 x VGA (D-sub 15) 1 x DVI-D 1 x S-Video 1 x Composite |

*Outside dimension and I/O will be different from standard

Mechanical Drawing

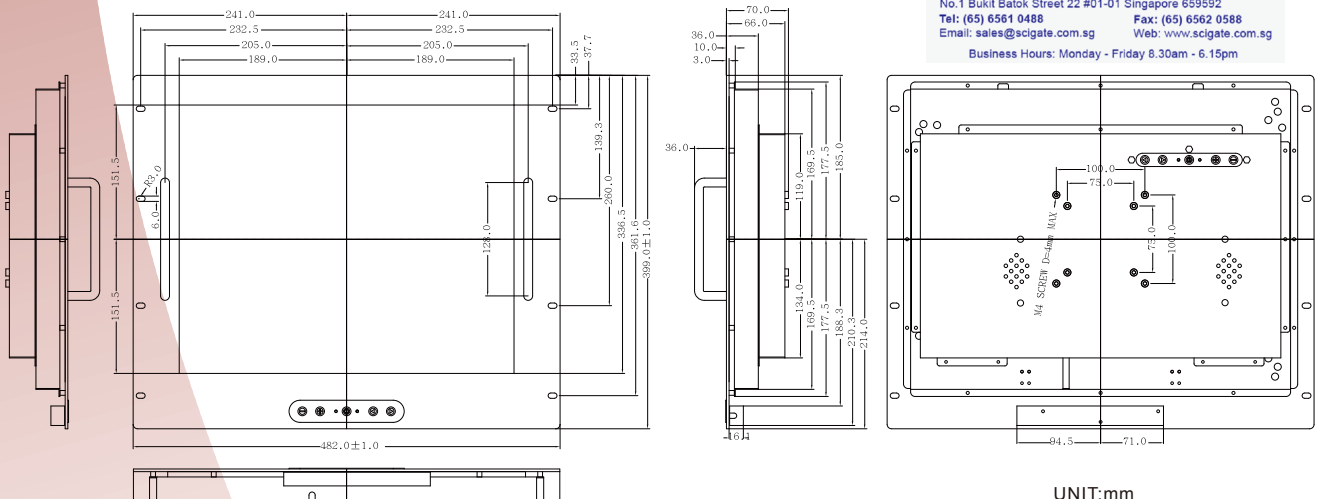

UNIT:mm

*Note: The mechanical drawing may change when adding touch screen.
Please contact our sales representative if you need further product information.

SCIGATE
Your Automation Partner

SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm