


GC65 Display

7"

Specifications




Model Name	W07L100-GC01
Viewable Size Image	7" TFT
Active Display Area(mm)	153.6 (H) x 90 (V)
Display Resolution	1024 x 600
Pixel Pitch(mm)	0.15 (H) x 0.15 (V)
Recommended Resolution	1024 x 600 @60Hz
Contrast Ratio	700:1 (typ.)
Brightness(cd/m ²)	1000 cd/m ² (typ.)
Viewing Angle(CR>=10)	-75~75 (H); -75~70 (V)
Power Source	9-24V DC
Power Consumption	10 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	Yes
Input Ports	1 x 9-24V DC, 1 x VGA, 1 x HDMI, 1 x Touch(USB)
Touch Screen	Projective Capacitive Touch(USB) (optional protection glass)
Operating Temperature	-15°C~55°C
Storage Temperature	-30°C~70°C
Operating Humidity	10%~95% (non-condensing)
IP Rating	Front IP65
Certifications & Standards	CE, FCC



- 1
- 2
- 3
- 4

1. 9-24V DC Power Jack
2. VGA
3. HDMI
4. Touch(USB)
5. 1W Speaker
6. OSD Control Panel

Mechanical Drawing

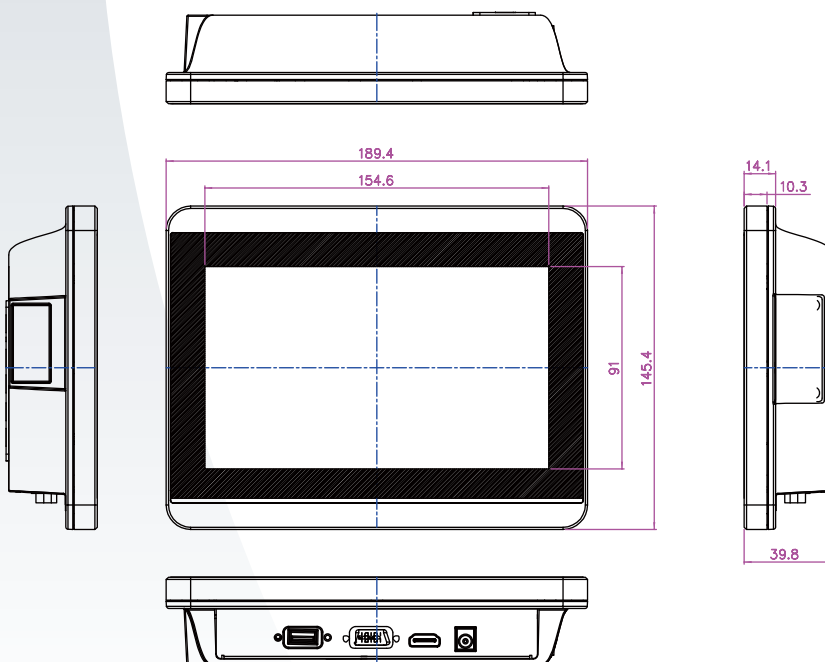

SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

