


# 10.1" P-Cap Chassis Display - W10L100-PCH1(HB)

## Features

- 10.1" 1024 x 600 Resolution
- Projected Capacitive Multi-Touch (P-Cap)
- Front IP65 Water and Dust Proof
- VGA input and variety of optional connectors
- USB port for touch
- Stylish and elegant design

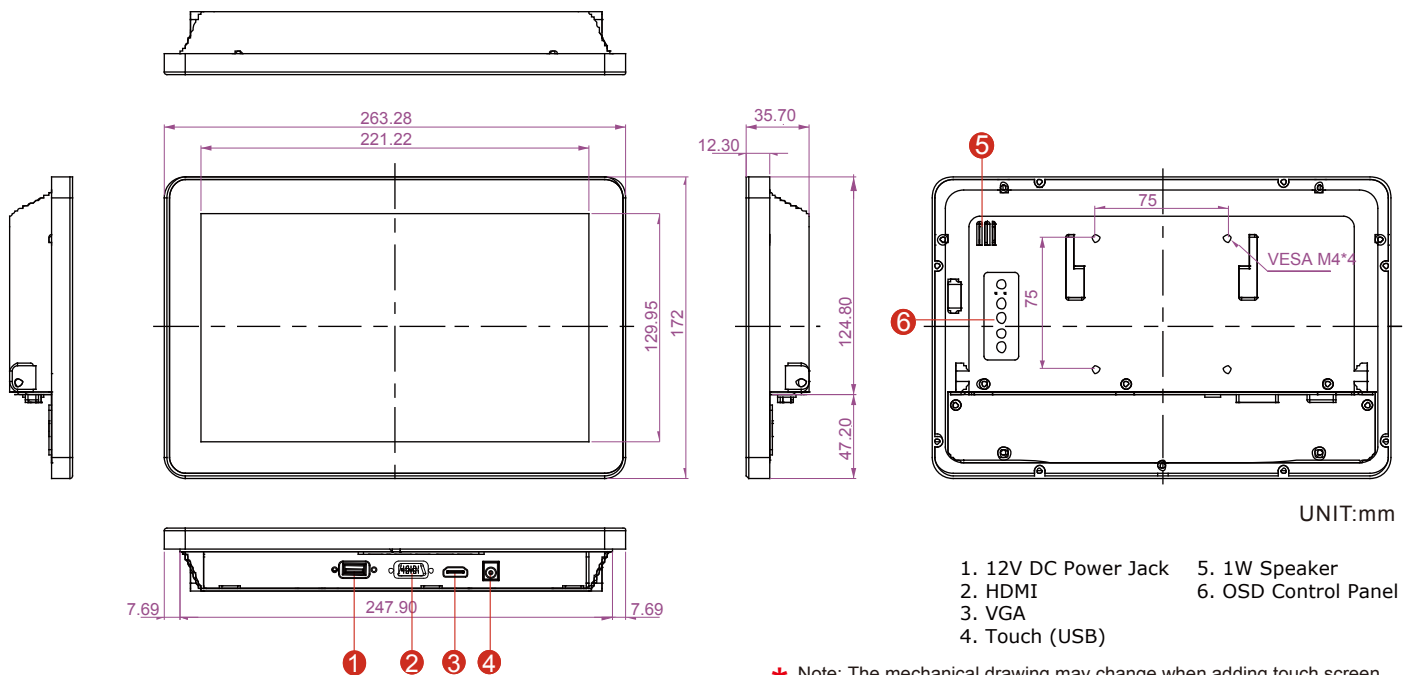

- 1. 12V DC Power Jack
- 2. HDMI
- 3. VGA
- 4. Touch (USB)
- 5. 1W Speaker
- 6. OSD Control Panel

\* Note: The mechanical drawing may change when adding touch screen. Please contact our sales representative if you need further product information.

## Specifications

### Display

- Panel Size : 10.1"
- Active Display Area(mm) : 222.72(H)x125.28(V)
- Resolution : 1024x600
- Brightness(cd/m2) : 450(Typical)
- Contrast Ratio : 800:1 (Typical)
- Viewing Angles(CR>=10 L/R/U/D) : -75~80(H) ; -80~80(V)
- Display Colors : 16.7M (8 bits/color)
- Standard Input Signal : 1 x VGA (D-sub 15)  
1 x HDMI (Type-A)

### Power Considerations

- Power Input : 12V DC, with external AC Adapter (100V~240V)
- Power Consumption : 10W typical , Normal operation

### Environment

- Operating temperature : 0~50°C
- Storage Temperature : -10~60°C

### Output

- Touch Screen : Projected Capacitive
- Touch Interface : USB
- Audio / Speakers (Optional)\* : Audio line in (3.5mm) + Speaker x2
- OSD : 5 Keys: - , + , Power , Esc , Enter

### Accessories

- Accessories : Power AC-DC Adapter(100V~240V)  
: VGA cable (1.8m)  
: HDMI cable (2m)

\*Outside dimension and I/O will be different from standard

### I/O Optional

|             |   |
|-------------|---|
| Optional 1* | 1 x VGA (D-sub 15)<br>1 x HDMI (Type-A)<br>1 x DVI-D            |
| Optional 2* | 1 x VGA (D-sub 15)<br>1 x DVI-D<br>1 x S-Video<br>1 x Composite |



**SCIGATE AUTOMATION (S) PTE LTD**  
 No.1 Bukit Batok Street 22 #01-01 Singapore 659592  
 Tel: (65) 6561 0488 Fax: (65) 6562 0588  
 Email: sales@scigate.com.sg Web: www.scigate.com.sg  
 Business Hours: Monday - Friday 8.30am - 6.15pm

