


W22IC7T-CHA3 21.5" Panel PC (Intel® Core™ i7-620M/i5-520M)


Mechanical Design



Chassis

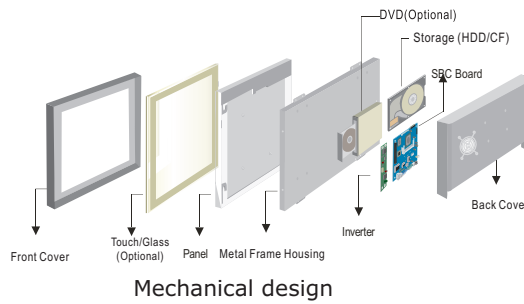


Mechanical design

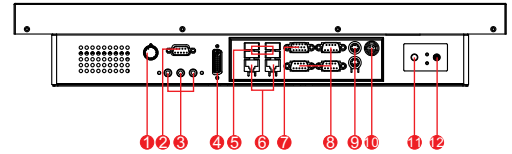

1. Brightness Adjustment Knob
2. RS-232 Conn. (Optional)
3. Audio Jack
4. DVI (Optional)
5. USB
6. LAN
7. VGA
8. RS-232 Conn.
9. PS/2
10. DC IN Power Jack
11. Power On Button
12. Power Reset Button

Dimensions

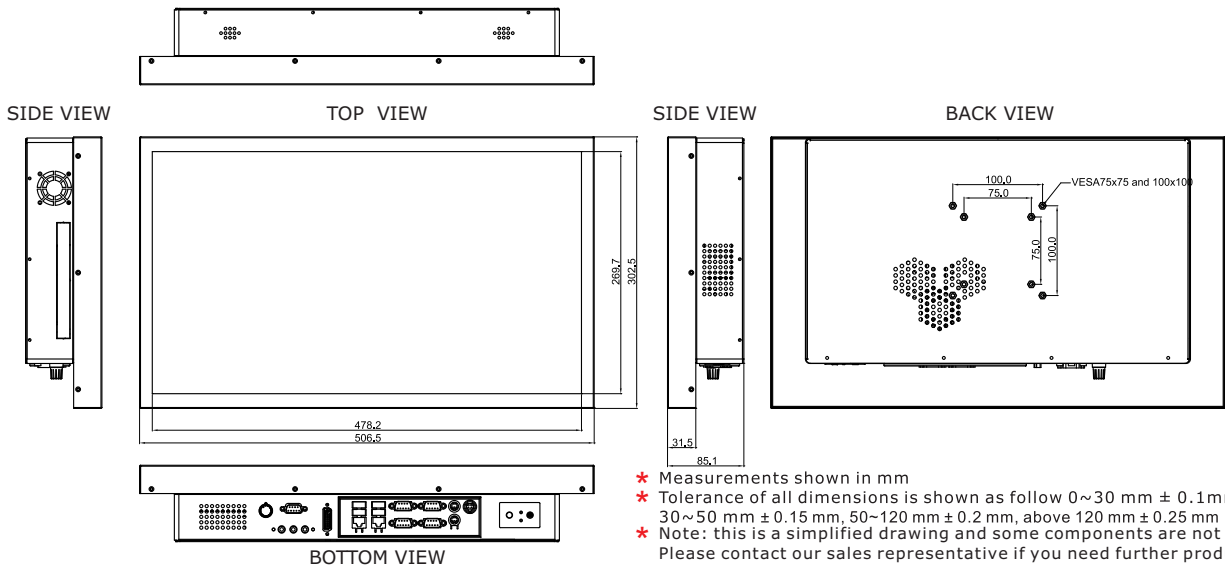

- * Measurements shown in mm
- * Tolerance of all dimensions is shown as follow 0~30 mm ± 0.1mm, 30~50 mm ± 0.15 mm, 50~120 mm ± 0.2 mm, above 120 mm ± 0.25 mm
- * Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Fully Integrated I/O

Specifications

System :

- CPU : Intel® Core™ i7-620M/i5-520M Processor (2.66GHz / 2.4GHz)
- Memory : 2 x SO-DIMM, Max 8GB DDR3 1066/800
- System Chipset : Intel® HM55 Chipset
- Storage : 2 x SATA II
- LAN : Dual Broadcom BCM57780 GbE
- Audio Codec : Realtek ALC888 HD Audio Codec

Input / Output :

- Serial Ports : 2 x RS232, 1 x RS232 (Default) / 422 / 485
- USB Ports : 4 x USB
- Keyboard / Mouse : 2 x PS/2
- Ethernet : 2 x RJ 45 Gbit
- VGA : 1 x VGA (female)
- Audio : Line-Out, Line-In, Mic in
- DVI : 1 x DVI (optional)

Expansion Slot :

- 1 x PCI-E(x16), 2 x Mini PCI-E

Power Specifications :

- Power Input : 12V DC IN (Lockable Power Jack)
- Power Consumption : 139W (typ.)(Max.backlight & high CPU load)

Accessories :

- External Adapter : 110~240V Ac-in power adapter

Panel Spec :

- Size/Type : 21.5" TFT
- Resolutions : 1920 x 1080
- Brightness : 250 cd/m² (typ.)
- Contrast Ratio : 1000 : 1 (typ.)
- Viewing Angles : -89~89 (H) ; -89~89 (V)
- Max Colors : 16.7M(8bits/colors)

Environment Considerations :

- Operating Temperature : 0°C to 50°C
- Operating Relative Humidity : 30% to 90% (non condensing)

OS BSP / Driver Support :

- Support Windows 7 / Windows XP Embedded / Windows XP Pro Embedded / Linux

Order Options :

- | | |
|-------------------------------------|-----------------------------|
| Mechanical : Chassis | CPU : Check with Sales |
| Touch : 5 Wires Resistive(Optional) | RAM : SO-DIMM DDR3 1066/800 |
| | Storage : 3.5" HDD/SSD/CF |
| | DVD : Optional |

(A customized housing is needed if you have demands of SAW/IR/IT/SC touch)



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
 Tel: (65) 6561 0488 Fax: (65) 6562 0588
 Email: sales@scigate.com.sg Web: www.scigate.com.sg
 Business Hours: Monday - Friday 8.30am - 6.15pm



Note: All Specifications are subject to change without prior notice!

date: 11-May-2017 V1.5